

# PATENT COOPERATION TREATY

From the INTERNATIONAL BUREAU

**PCT**

## NOTIFICATION OF ELECTION

(PCT Rule 61.2)

To:

Commissioner  
US Department of Commerce  
United States Patent and Trademark  
Office, PCT  
2011 South Clark Place Room  
CP2/5C24  
Arlington, VA 22202  
ETATS-UNIS D'AMERIQUE  
in its capacity as elected Office

<b>Date of mailing</b> (day/month/year) 10 May 2001 (10.05.01)	
<b>International application No.</b> PCT/IE00/00104	<b>Applicant's or agent's file reference</b> PM551PCT
<b>International filing date</b> (day/month/year) 08 September 2000 (08.09.00)	<b>Priority date</b> (day/month/year) 09 September 1999 (09.09.99)
<b>Applicant</b> LACEY, Liam, J.	

1. The designated Office is hereby notified of its election made:

☒ in the demand filed with the International Preliminary Examining Authority on:  
19 March 2001 (19.03.01)

☐ in a notice effecting later election filed with the International Bureau on:

2. The election ☒ was

☐ was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

<b>The International Bureau of WIPO</b> 34, chemin des Colombettes 1211 Geneva 20, Switzerland  Facsimile No.: (41-22) 740.14.35	<b>Authorized officer</b>  Juan Cruz  Telephone No.: (41-22) 338.83.38
--	--

# PATENT COOPERATION TREATY

OCT 2001

From the  
INTERNATIONAL PRELIMINARY EXAMINING AUTHORITY

PCT

## NOTIFICATION OF TRANSMITTAL OF THE INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Rule 71.1)

To:

SHORTT, Peter B. et al  
TOMKINS & CO.  
5 Dartmouth Road  
Dublin 6  
IRLANDE

Date of mailing  
(day/month/year) 15.10.2001

Applicant's or agent's file reference  
J.

### IMPORTANT NOTIFICATION

International application No.  
PCT/IE00/00104

International filing date (day/month/year)  
08/09/2000

Priority date (day/month/year)  
09/09/1999

Applicant  
COMTOR LIMITED et al

1. The applicant is hereby notified that this International Preliminary Examining Authority transmits herewith the international preliminary examination report and its annexes, if any, established on the international application.
2. A copy of the report and its annexes, if any, is being transmitted to the International Bureau for communication to all the elected Offices.
3. Where required by any of the elected Offices, the International Bureau will prepare an English translation of the report (but not of any annexes) and will transmit such translation to those Offices.

#### 4. REMINDER

The applicant must enter the national phase before each elected Office by performing certain acts (filing translations and paying national fees) within 30 months from the priority date (or later in some Offices) (Article 39(1)) (see also the reminder sent by the International Bureau with Form PCT/IB/301).

Where a translation of the international application must be furnished to an elected Office, that translation must contain a translation of any annexes to the international preliminary examination report. It is the applicant's responsibility to prepare and furnish such translation directly to each elected Office concerned.

For further details on the applicable time limits and requirements of the elected Offices, see Volume II of the PCT Applicant's Guide.

ENTERED ON  
17 OCT 2001  
INFRONA

Name and mailing address of the IPEA/

 European Patent Office  
D-80298 Munich  
Tel. +49 89 2399 - 0 Tx: 523656 epmu d  
Fax: +49 89 2399 - 4465

Authorized officer

Brandt, M

Tel. +49 89 2399-2926




# PATENT COOPERATION TREATY

# PCT

## INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

Applicant's or agent's file reference ./.	<b>FOR FURTHER ACTION</b>		See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)
International application No. PCT/IE00/00104	International filing date (day/month/year) 08/09/2000	Priority date (day/month/year) 09/09/1999	
International Patent Classification (IPC) or national classification and IPC B65B11/58			
Applicant COMTOR LIMITED et al			
<p>1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.</p> <p>2. This REPORT consists of a total of 6 sheets, including this cover sheet.</p> <p><input checked="" type="checkbox"/> This report is also accompanied by ANNEXES, i.e. sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).</p> <p>These annexes consist of a total of 3 sheets.</p>			
<p>3. This report contains indications relating to the following items:</p> <ul style="list-style-type: none"> <li>I <input checked="" type="checkbox"/> Basis of the report</li> <li>II <input type="checkbox"/> Priority</li> <li>III <input checked="" type="checkbox"/> Non-establishment of opinion with regard to novelty, inventive step and industrial applicability</li> <li>IV <input checked="" type="checkbox"/> Lack of unity of invention</li> <li>V <input checked="" type="checkbox"/> Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement</li> <li>VI <input type="checkbox"/> Certain documents cited</li> <li>VII <input type="checkbox"/> Certain defects in the international application</li> <li>VIII <input type="checkbox"/> Certain observations on the international application</li> </ul>			
Date of submission of the demand  19/03/2001		Date of completion of this report  15.10.2001	
Name and mailing address of the international preliminary examining authority:  European Patent Office D-80298 Munich Tel. +49 89 2399 - 0 Tx: 523656 epmu d Fax: +49 89 2399 - 4465		Authorized officer  Ungureanu, M  Telephone No. +49 89 2399 8418	



**INTERNATIONAL PRELIMINARY  
EXAMINATION REPORT**

International application No. PCT/IE00/00104

**I. Basis of the report**

1. With regard to the **elements** of the international application (*Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to this report since they do not contain amendments (Rules 70.16 and 70.17)*):

**Description, pages:**

1-19	as originally filed			
20	as received on	19/07/2001	with letter of	18/07/2001

**Claims, No.:**

1-4,6-13	as originally filed			
5	as amended under Article 19			
18,19	as received on	19/07/2001	with letter of	18/07/2001

**Drawings, sheets:**

1/32-32/32	as originally filed
------------	---------------------

2. With regard to the **language**, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.

These elements were available or furnished to this Authority in the following language: , which is:

- ☐ the language of a translation furnished for the purposes of the international search (under Rule 23.1(b)).
- ☐ the language of publication of the international application (under Rule 48.3(b)).
- ☐ the language of a translation furnished for the purposes of international preliminary examination (under Rule 55.2 and/or 55.3).

3. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international preliminary examination was carried out on the basis of the sequence listing:

- ☐ contained in the international application in written form.
- ☐ filed together with the international application in computer readable form.
- ☐ furnished subsequently to this Authority in written form.
- ☐ furnished subsequently to this Authority in computer readable form.
- ☐ The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
- ☐ The statement that the information recorded in computer readable form is identical to the written sequence

**INTERNATIONAL PRELIMINARY  
EXAMINATION REPORT**

International application No. PCT/IE00/00104

listing has been furnished.

4. The amendments have resulted in the cancellation of:

- ☐ the description,            pages:
- ☐ the claims,                Nos.:
- ☐ the drawings,            sheets:

5. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed (Rule 70.2(c)):

*(Any replacement sheet containing such amendments must be referred to under item 1 and annexed to this report.)*

6. Additional observations, if necessary:

**III. Non-establishment of opinion with regard to novelty, inventive step and industrial applicability**

1. The questions whether the claimed invention appears to be novel, to involve an inventive step (to be non-obvious), or to be industrially applicable have not been examined in respect of:

- ☐ the entire international application.
- ☒ claims Nos. 14-17.

because:

- ☒ the said international application, or the said claims Nos. relate to the following subject matter which does not require an international preliminary examination (*specify*):  
**see separate sheet**
- ☐ the description, claims or drawings (*indicate particular elements below*) or said claims Nos. are so unclear that no meaningful opinion could be formed (*specify*):
- ☐ the claims, or said claims Nos. are so inadequately supported by the description that no meaningful opinion could be formed.
- ☐ no international search report has been established for the said claims Nos. .

2. A meaningful international preliminary examination cannot be carried out due to the failure of the nucleotide and/or amino acid sequence listing to comply with the standard provided for in Annex C of the Administrative Instructions:

- ☐ the written form has not been furnished or does not comply with the standard.
- ☐ the computer readable form has not been furnished or does not comply with the standard.

**INTERNATIONAL PRELIMINARY  
EXAMINATION REPORT**

International application No. PCT/IE00/00104

**IV. Lack of unity of invention**

1. In response to the invitation to restrict or pay additional fees the applicant has:

- ☒ restricted the claims.
- ☐ paid additional fees.
- ☐ paid additional fees under protest.
- ☐ neither restricted nor paid additional fees.

2. ☐ This Authority found that the requirement of unity of invention is not complied and chose, according to Rule 68.1, not to invite the applicant to restrict or pay additional fees.

3. This Authority considers that the requirement of unity of invention in accordance with Rules 13.1, 13.2 and 13.3 is

- ☐ complied with.
- ☒ not complied with for the following reasons:  
**see separate sheet**

4. Consequently, the following parts of the international application were the subject of international preliminary examination in establishing this report:

- ☐ all parts.
- ☒ the parts relating to claims Nos. 1-13,18,19.

**V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement**

1. Statement

Novelty (N)	Yes:	Claims	1-13,18,19
	No:	Claims	
Inventive step (IS)	Yes:	Claims	1-13,18,19
	No:	Claims	
Industrial applicability (IA)	Yes:	Claims	1-13,18,19
	No:	Claims	

2. Citations and explanations  
**see separate sheet**

Section III:

See section IV.

Section IV:

1. The applicant restricted the claims by combining claim 19 (originally filed) with claim 20 (originally filed) into a new claim 19.
2. a) Independent claims 1, 6, 18, and 19 define a method and an apparatus for wrapping loads such that it creates also at least two fork-entry openings.  
  
b) Independent claim 14 and the ones dependent on this (15 to 17) define a method and an apparatus for wrapping loads with the help of a wrapping platform and a pivoting wrapping table.

The common concept linking together the two groups of claims is the following:

"Apparatus for wrapping a load (1) comprising a first wrapping station (5) including a wrapping platform (20) to receive the load (1) to be wrapped, wrapping material dispensing means (40) at the first wrapping station (5), means for establishing relative rotational motion between the platform (20) and dispensing means (40), to partially wrap the load (1) with the wrapping material, transfer means (6) for transferring the load, through about 90°, to a second wrapping station (7), and means at the second wrapping station for completing the wrapping of the load (1)".

This common concept is **not novel**, see document D1= WO-A-9904613. Since it is clear that the two claims lack "the same corresponding special technical features" within the meaning of Rule 13.2 PCT, the unity requirement of Rule 13.1 PCT is not fulfilled.

3. The applicant requested in his letter of 18.07.01 that examination proceed on the basis of independent claims 1, 6, 18, and 19.

Section V:

The invention relates to a method and apparatus for wrapping loads of goods and materials in a wrapping material including an internal support means to assist in transporting the loads. These are known, for example, from document US-A-5720153, where the support means to assist in transporting loads are pallet platforms.

According to the invention the supporting means are made by creating fork-entry openings without the use of a pallet platform.

The features of each independent claim is neither known from, nor rendered obvious by the available prior art.

Therefore the subject-matter of each of independent claims 1, 6, 18, and 19 is new and inventive (Article 33(2) and 33(3)PCT). Consequently, the subject-matter of dependent claims 2 to 5 and 7 to 13 fulfils as well the requirements of novelty and inventive step.

Furthermore, claims 1 to 13, 18, and 19 are considered as susceptible of industrial application.

## PATENT COOPERATION TREATY

## PCT

## INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference <b>PM551PCT</b>	<b>FOR FURTHER ACTION</b> see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.	
International application No. <b>PCT/IE 00/ 00104</b>	International filing date (day/month/year) <b>08/09/2000</b>	(Earliest) Priority Date (day/month/year) <b>09/09/1999</b>
Applicant  <b>COMTOR LIMITED</b>		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 2 sheets.



It is also accompanied by a copy of each prior art document cited in this report.

## 1. Basis of the report

- a. With regard to the **language**, the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.



the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

- b. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international search was carried out on the basis of the sequence listing :



contained in the international application in written form.



filed together with the international application in computer readable form.



furnished subsequently to this Authority in written form.



furnished subsequently to this Authority in computer readable form.



the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.



the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

2. ☐ **Certain claims were found unsearchable** (See Box I).

3. ☐ **Unity of invention is lacking** (see Box II).

4. With regard to the **title**,

the text is approved as submitted by the applicant.



the text has been established by this Authority to read as follows:

5. With regard to the **abstract**,

the text is approved as submitted by the applicant.



the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the **drawings** to be published with the abstract is Figure No.

as suggested by the applicant.



because the applicant failed to suggest a figure.



because this figure better characterizes the invention.

1



None of the figures.

As shown in Figures 30, 31 and 33 the ends of the battens have inclines 48, that is the end walls may be inclined at about  $70^{\circ}$  to the horizontal. Again, this assists in reducing abrasion or tearing of the film 43 in the corner regions of the load 1.

5            Modifications may be made to the method and apparatus described above without departing from the scope of the invention claimed.

For example, at the first wrapping station, the embodiment described utilises two film dispensers 40 mounted on uprights 41. The use of two film dispensers reduces  
10   the wrapping cycle time. However, the two dispensers 40 could be replaced by a single film dispenser 40.

Also, at the first wrapping station the wrapping platform 20 is in the form of a rotary turntable, which rotates relative to the fixed film dispensers 40. It would be  
15   possible to utilise a non-rotatable platform, but have the film dispensers 40 rotate around the platform 20, for example utilising an arrangement similar to that described in the second wrapping station.

Modifications may also be made to the wrapping arrangement at the second  
20   wrapping station. For example, the belt table 50 may be rotated, in well known manner, about a vertical axis relative to one or more fixed film dispensers 40.

Furthermore, at either, or both of the first and second wrapping stations, there could be contra-rotation of the wrapping platform 20 (and/or belt table 50)  
25   relative to a rotatable dispenser or dispensers 40, for example as described in PCT WO 99/64297.

The words "comprises/comprising" and the words "having/including" when used herein with reference to the present invention are used to specify the presence of  
30   stated features, integers, steps or components but does not preclude the presence or addition of one or more other features, integers, steps, components or groups thereof.

normally horizontal position, through approximately 90°, to transfer the partially wrapped load (1) onto the belt table (50) at the second wrapping station (7), and wherein the wrapping platform (20) is moveable horizontally and vertically such that it may align a load (1) on the wrapping platform (20) with the belt table (50) when the  
5 belt table (50) is in a substantially vertical position.

15. Apparatus as claimed in claim 14, wherein the belt table (50) is pivotable about a main pivot (60) one by means of at least one transfer ram (70) from its normal horizontal position and the wrapping platform assembly (20) is also pivotable about the main pivot  
10 (60), by means of at least one transfer ram (63), through approximately 90° towards the belt table (50).

16. Apparatus as claimed in claim 15, wherein the transfer ram (70), for pivoting the belt table (50) is pivotably connected to the wrapping platform assembly (20) such that  
15 when the wrapping platform (20) is pivoted, through about 90°, by the second transfer ram (63), the belt table (50) is caused to pivot back to its original horizontal position to received the partially wrapped load (1).

17. Apparatus as claimed in any of claims 14 to 11, wherein the belt table (50) is  
20 pivotably mounted at opposite ends such that it may be pivoted forwardly to engage with the load (1) on the wrapping table, and subsequent to the completion of wrapping at the second wrapping station (7), may be pivoted rearwardly to off-load the wrapped load (1).

25 18. A method for wrapping loads (1) in a wrapping material (43) comprising the steps of:

- (a) creating at least two fork-entry openings in a spaced, substantially parallel orientation on one surface of the load (1) without the use of a pallet platform; and
- (b) at least partially wrapping the load in a wrapping material (43) such that the  
30 fork-entry openings are at least partially enveloped in the wrapping material (43) by establishing relative rotational motion between the load (1) and a dispensing means (40) for the wrapping material.

19. A method for wrapping loads (1) in wrapping material (43), which comprises
- (a) moving a load (1) onto a wrapping platform (20) at a first wrapping station (5);
  - (b) creating at least two fork-entry openings in a spaced, substantially parallel orientation on one surface of the load (1) without the use of a pallet platform;
  - (c) rotating the wrapping platform (20) to rotate the load (1) relative to dispensing means (40) for wrapping material (43) and/or rotating the dispensing means (40) around the load (1) on the wrapping platform (20), to partially wrap the load in wrapping material;
  - (d) pivoting a wrapping table (50) at the second wrapping station (7) from a substantially horizontal position to a substantially vertical position;
  - (e) before, after or simultaneously with step (a) moving the wrapping platform (20) with the load (1) horizontally and/or vertically to position the load (1) in a desired alignment with the wrapping table (50);
  - (f) returning the wrapping table (50) back from the substantially vertical position to the substantially horizontal, and simultaneously turning the wrapping platform (20) from the horizontal position towards a substantially vertical position such that the load (1) is transferred from the wrapping platform (20) onto the wrapping table (50); and
  - (g) rotating the load (1) about a substantially horizontal axis on the wrapping table (50) and simultaneously effecting a relative rotational movement, about a substantially vertical axis, between the load (1) and at least one film dispenser (80) to completely wrap the load (1) in wrapping material (43).

As shown in Figures 30, 31 and 33 the ends of the battens have inclines 48, that is the end walls may be inclined at about 70° to the horizontal. Again, this assists in reducing abrasion or tearing of the film 43 in the corner regions of the load 1.

5

Modifications may be made to the method and apparatus described above without departing from the scope of the invention claimed.

For example, at the first wrapping station, the embodiment described utilises two film dispensers 40 mounted on uprights 41. The use of two film dispensers reduces the wrapping cycle time. However, the two dispensers 40 could be replaced by a single film dispenser 40.

Also, at the first wrapping station the wrapping platform 20 is in the form of a rotary turntable, which rotates relative to the fixed film dispensers 40. It would be possible to utilise a non-rotatable platform, but have the film dispensers 40 rotate around the platform 20, for example utilising an arrangement similar to that described in the second wrapping station.

Modifications may also be made to the wrapping arrangement at the second wrapping station. For example, the belt table 50 may be rotated, in well known manner, about a vertical axis relative to one or more fixed film dispensers 401.

Furthermore, at either, or both of the first and second wrapping stations, there could be contra-rotation of the wrapping platform 20 (and/or belt table 50) relative to a rotatable dispenser or dispensers 40, for example as described in PCT WO 99/64297.

The words "comprises/comprising" and the words "having/including" when used herein with reference to the present invention are used to specify the presence of

30

normally horizontal position, through approximately 90°, to transfer the partially wrapped load (1) onto the belt table (50) at the second wrapping station (7), and wherein the wrapping platform (20) is moveable horizontally and vertically such that it may align a load (1) on the wrapping platform (20) with the belt table (50) when the belt table (50) is in a substantially vertical position.

15. Apparatus as claimed in claim 14, wherein the belt table (50) is pivotable about a main pivot (60) one by means of at least one transfer ram (70) from its normal horizontal position and the wrapping platform assembly (20) is also pivotable about the main pivot (60), by means of at least one transfer ram (63), through approximately 90° towards the belt table (50).

16. Apparatus as claimed in claim 15, wherein the transfer ram (70), for pivoting the belt table (50) is pivotably connected to the wrapping platform assembly (20) such that when the wrapping platform (20) is pivoted, through about 90°, by the second transfer ram (63), the belt table (50) is caused to pivot back to its original horizontal position to received the partially wrapped load (1).

17. Apparatus as claimed in any of claims 14 to 11, wherein the belt table (50) is pivotably mounted at opposite ends such that it may be pivoted forwardly to engage with the load (1) on the wrapping table, and subsequent to the completion of wrapping at the second wrapping station (7), may be pivoted rearwardly to off-load the wrapped load (1).

18. A method for wrapping loads (1) in a wrapping material (43) comprising the steps of:

(a) creating at least two fork-entry openings in a spaced, substantially parallel orientation on one surface of the load (1); and

(b) at least partially wrapping the load in a wrapping material (43) such that the fork-entry openings are at least partially enveloped in the wrapping material (43) by establishing relative rotational motion between the load (1) and a dispensing means (40) for the wrapping material.

19. A method for wrapping loads (1) in wrapping material (43), which comprises

(a) moving a load (1) onto a wrapping platform (20) at a first wrapping station (5);

(b) rotating the wrapping platform (20) to rotate the load (1) relative to dispensing means (40) for wrapping material (43) and/or rotating the dispensing means (40) around the load (1) on the wrapping platform (20), to partially wrap the load in wrapping material;

(c) pivoting a wrapping table (50) at the second wrapping station (7) from a substantially horizontal position to a substantially vertical position;

(d) before, after or simultaneously with step (a) moving the wrapping platform (20) with the load (1) horizontally and/or vertically to position the load (1) in a desired alignment with the wrapping table (50);

(e) returning the wrapping table (50) back from the substantially vertical position to the substantially horizontal, and simultaneously turning the wrapping platform (20) from the horizontal position towards a substantially vertical position such that the load (1) is transferred from the wrapping platform (20) onto the wrapping table (50); and

(f) rotating the load (1) about a substantially horizontal axis on the wrapping table (50) and simultaneously effecting a relative rotational movement, about a substantially vertical axis, between the load (1) and at least one film dispenser (80) to completely wrap the load (1) in wrapping material (43).

20. A method as claimed in Claim 19, characterised in that it includes the step of creating at least two fork-entry openings in a spaced, substantially parallel orientation on one surface of the load (1).

5. A method as claimed in claim 4, which comprises
- (a) placing at least two battens (10) on a top surface of the load (1);
  - (b) before or after step (a) moving the load (1) onto a wrapping platform (20) at a first wrapping station (5);
  - (c) rotating the wrapping platform (20) to rotate the load (1) relative to dispensing means (40) for wrapping material (43) and/or rotating the dispensing means (40) around the load (1) on the wrapping platform (20), to overlap at least part of the battens (10) to hold them in place on the load;
  - (d) pivoting a wrapping table (50) at the second wrapping station (7) from a substantially horizontal position to a substantially vertical position;
  - (e) before, after or simultaneously with step (d) moving the wrapping platform (20), with the load (1), horizontally and/or vertically to position the load (1) in a desired alignment with the wrapping table (50);
  - (f) returning the wrapping table (50) back from the substantially vertical position to the substantially horizontal, and simultaneously turning the wrapping platform (20) from the horizontal position towards a substantial vertical position such that the load (1) is transferred from the wrapping platform (20) onto the wrapping table (50); and
  - (g) rotating the load (1) about a substantially horizontal axis on the wrapping table (50) and simultaneously effecting a relative rotational movement, about a substantially vertical axis, between the load (1) and at least one film dispenser (40) to completely wrap the load (1) in wrapping material (43), including enveloping the battens (10) in the wrapping material (43).
6. Apparatus for wrapping a load (1) comprising a first wrapping station (5) including a wrapping platform (20) to receive the load (1) to be wrapped, batten placing means for placing battens (10) on a surface of the load, wrapping material dispensing

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
15 March 2001 (15.03.2001)

PCT

(10) International Publication Number  
**WO 01/17854 A1**

(51) International Patent Classification<sup>7</sup>: **B65B 11/58**

(21) International Application Number: **PCT/IE00/00104**

(22) International Filing Date:  
8 September 2000 (08.09.2000)

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:  
S990763 9 September 1999 (09.09.1999) **IE**

(71) Applicant (for all designated States except US): **COM-TOR LIMITED [IE/IE]; 51/52 Fitzwilliam Square, Dublin 2 (IE).**

(72) Inventor; and

(75) Inventor/Applicant (for US only): **LACEY, Liam, J. [IE/IE]; The Moorings, Merrion Road, Ballsbridge, Dublin 4 (IE).**

(74) Agents: **SHORTT, Peter, Bernard et al.; Tomkins & Co., 5 Dartmouth Road, Dublin 6 (IE).**

(81) Designated States (national): **AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.**


(84) Designated States (regional): **ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).**

**Published:**

- With international search report.
- With amended claims.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **A WRAPPING METHOD AND APPARATUS**

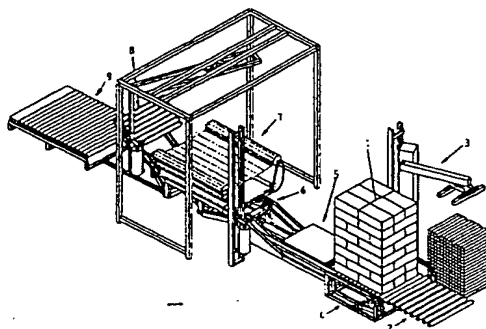

**WO 01/17854 A1**

(57) Abstract: The invention concerns a method and apparatus for wrapping loads (1) of goods and materials in a wrapping material, such as a plastics film, which comprises placing at least two battens in a spaced substantially parallel orientation on one surface of the load, partially wrapping the load in a wrapping material by rotating the load relative to dispensing means for the wrapping material and/or rotating the dispensing means around the load, to envelop the battens in the wrapping material and to hold the battens in place on the surface of the load, the battens being placed apart to support the load and being adapted to receive therebetween the forks of a fork-lift truck for transporting the load. Preferably, the wrapping material overlaps the ends of the battens to hold the battens in position. The load is then turned through about 90° from a first wrapping station (4) to a second wrapping station (7), where the wrapping is completed. The apparatus includes a first wrapping station (4) having a wrapping platform to receive the load (1) to be wrapped, a pick end place unit (3) at the first wrapping station (4) for placing battens on a surface of the load (1), wrapping material dispensing means at the first wrapping station, means for rotating the platform relative to dispensing means, and/or means for rotating the dispenser relative to the platform, to partially wrap the load (1), including at least part of the battens, with the wrapping material, transfer means (6) the load (1), through about 90° to a second wrapping station (7), and means at the second wrapping station (7) for completing the wrapping of the load (1).

5

10

## **A Wrapping Method and Apparatus**

15

### **Field of the Invention**

20

The invention relates to a method and apparatus for wrapping loads of goods and materials in a wrapping material including an internal support means to assist in transporting the loads. The invention provides an alternative to a conventional pallet but serves the same purpose of supporting and transporting loads.

### **Background of the Invention**

25

30

Pallets are commonly used for transporting and storing goods and materials. Pallets typically comprise a portable wooden platform on which the load is carried. The platform usually comprises two parallel planar surfaces spaced apart by transverse wooden battens to form channels intended to receive the forks of a fork-lift truck. Typically the load is built-up on the wooden platform and the whole load may then be cling-wrapped or heat-shrunk in a suitable plastics wrapping material.

The use of conventional wooden pallets represents a high element in the cost of transport and storage, and there is a further significant hidden cost in the logistics of pallet management. Firstly, there is the production cost of conventional wooden pallets which each utilise a large number of wooded elements which are joined together to form the pallet, usually using steel nails. There is a significant cost in the transport of the empty pallets; firstly they have to be shipped to the supplier, who uses the pallets for the transport of goods to a customer. In many cases, after use they have to be shipped back to the supplier as a return. It has been found that in the case of hired pallets, for example, they spend more time being trans-shipped than actually in use.

Conventional pallets utilise a lot of storage space at each destination, and in the event of the pallets being used for perishable goods, they must be stored under cover. It has been found that in many cases, the cost associated with the use of conventional pallets represents up to 50% of total packaging costs. Also, conventional pallets usually have wrapping material applied in one plane only, which can easily rupture.

The constant shipment of empty pallets results in a high level of pallet fatigue, resulting in damage to loads, and a high risk of injury to users due to hazardous pallet loads. The use of steel nails in the manufacture of conventional pallets is also a problem. There are significant breakages of pallets through handling causing the nails to protrude from the pallets. These frequently are a cause of motor vehicle tyre punctures and of injury to workers.

WO 99/04613 of the same applicant discloses a wrapping machine for wrapping materials, with a strip of wrapping material comprising a first wrapping station having wrapping means for applying a strip of wrapping around the bale to partially wrap the bale in wrapping material, a second wrapping station having wrapping means for applying a strip of wrapping material around the bale to completely wrap the bale in wrapping material, and transfer means for transferring the partially wrapped bale from the first wrapping station to the second wrapping station. This machine is particularly

suitable for compacting and wrapping bales of fodder and the like, but also discloses a wrapping machine for wrapping loose material, such as bricks, in a wrapping material. However, it does not disclose means for forming and wrapping a load with integral battens.

5

### **Object of the Invention**

It is an object of the invention to provide a method which will eliminate the conventional pallet as the main package handling system and the inefficiencies associated with conventional pallets while continuing to provide the conventional pallet's abilities as far as support and ease of transport is concerned. It is also the purpose of the invention to provide an apparatus that will fully automate a process of providing a method of forming palletized loads/stacks without the use of conventional pallets.

15

### **Summary of the Invention**

The invention provides a method for wrapping loads in a wrapping material comprising the steps of:

20

(a) placing at least two battens in a spaced, substantially parallel orientation on one surface of the load; and

(b) at least partially wrapping the load in a wrapping material such that the battens are at least partially enveloped in the wrapping material and held in place on the surface of the load.

25

Preferably, the load is partially wrapped by establishing relative rotational motion between the load and dispensing means for the wrapping material.

In accordance with another aspect the invention provides a method for wrapping loads of goods and materials in a wrapping material, such as a plastics film, which comprises placing at least two battens in a spaced substantially parallel

30

orientation on one surface of the load, at least partially wrapping the load in a wrapping material by rotating the load relative to dispensing means for the wrapping material, and/or rotating the dispensing means around the load, to envelop the battens in the wrapping material and to hold the battens in place on the surface of the load, the battens  
5 being placed apart to support the load and being adapted to receive therebetween the forks of a fork-lift truck for transporting the load.

In a preferred embodiment the method comprises placing the batten on a top surface of the load, partially wrapping the load at a first wrapping station with a  
10 wrapping material including overlapping at least parts of the battens with the wrapping material to hold the battens in position, turning the load through about 90° from the first wrapping station to a second wrapping station, and completing the wrapping of the load at the second wrapping station, including enveloping the battens in the wrapping material. Subsequently, the load is tipped from the second wrapping station onto the  
15 side containing the battens, which then act as a pallet to elevate and support the load for transport. That is, the battens provide the same function as a pallet in elevating the base of the wrapped load or stack off the ground to allow the forks of a fork lift truck to enter under the load.

The invention also includes apparatus for carrying out the method  
20 comprising a first wrapping station including a wrapping platform to receive the load to be wrapped, batten placing means for placing battens on a surface of the load, wrapping material dispensing means at the first wrapping station, means for rotating the platform relative to dispensing means, and/or means for rotating the dispenser relative to the  
25 platform, to partially wrap the load, including at least part of the battens, with the wrapping material, means for transferring the load, through about 90° to a second wrapping station, and means at the second wrapping station for completing the wrapping of the load.

30 Preferably, the wrapping means at the first wrapping station includes means for rotating the load about a vertical axis, and the wrapping means at the second

wrapping station includes a belt table for rotating the load about a substantially horizontal axis and film dispensing means for rotation about a substantially vertical axis to apply film to the load as it is rotated about a horizontal axis.

5                   Alternatively, the belt table is additionally rotated about a vertical axis relative to the film dispensing means.

                  Preferably, the belt table at the second wrapping station is pivotable from a normally horizontal position, through approximately 90°, to a position in which  
10   engagement means on the belt table engage with means on the wrapping platform, and the wrapping platform is pivotally mounted, such that when the belt table is returned to its original horizontal position it causes the wrapping platform to swing from a normally horizontal position, through approximately 90°, to deposit the partially wrapped load onto the belt table at the second wrapping station.

15

                  The engagement means may include tie-rams.

                  The apparatus may include a tipping device positioned forwardly of the belt table by means of which the load may be tipped from the apparatus. Suitably, the belt  
20   table is pivotable about a substantially horizontal axis to transfer the wrapped load onto the tipping device. Thus, the belt table is pivotable from either end, such that it can be tipped forwardly, through 90°, to receive the load from the first wrapping station, and can be tipped rearwardly to off-load the load.

25                   To achieve transfer of a load from the wrapping platform at the first wrapping station to the second wrapping station, the belt table at the second wrapping station is tipped forwardly, through 90°, by means of a hydraulic ram which is pivotably connected to the wrapping platform assembly at the first wrapping station such that  
30   when the wrapping platform is pivoted through 90°, by a second hydraulic ram, the belt table is caused to pivot back, through 90°, to its original horizontal position to receive the partially wrapped load.

The invention also relates to a wrapped load/stack including at least two substantially parallel battens located on at least one side surface of the load and held in position by the wrapping material.

5

The method and apparatus of the invention provides for wrapped loads/stacks with integral supports thus eliminating many of the inefficiencies and costs associated with the use of conventional pallets. The apparatus of the invention replaces the conventional pallet with two or three battens held in place by the wrapping. The wrapping is applied in two planes substantially at right angles to each other, thus giving high levels of strength and providing a very secure package. Also, depending upon the amount of wrapping material applied, the wrapped load may be rendered water tight and air tight.

10

15

It is estimated that utilising the method and apparatus of the invention there is a saving in the volume of timber of about 74.45 (neglecting saw losses which are higher with pallets) compared to the volume of timber needed to manufacture conventional pallets. This means that for every load on a pallet, four separate loads could be produced on battens using the same amount of timber. However, in terms of pallet return transport costs there is an even more dramatic saving. It is estimated that there is a reduction of about 93% in the transportation volumes using the battens of the invention in place of conventional pallets. This makes a very positive contribution in reducing environmental pollution both in terms of vehicle emission and wood/nail waste with the inherent cost savings on pallet storage, space/stocking logistics, transport and recovery cost and management time. Furthermore, the battens are likely to have a far longer lifespan than pallets because they are less susceptible to change.

20

25

30

Further benefits are the provision of a robust packing method which results in a strong, airtight (important where oxidation, fermentation and moisture loss are concerned), waterproof and easily handled package.

**Brief Description of the Drawings**

An embodiment of the invention is hereinafter described with reference to the accompanying drawings, wherein:

5

Figure 1 is an overall isometric view of the apparatus of the invention;

Figure 2 is an overall plan view;

10

Figures 3 is an elevation of a part of the apparatus at the first stage of operation;

Figure 4 is an isometric view of part of the machine at the first stage of operation;

15

Figure 5 is an elevation corresponding to Figure 4;

Figure 6 and 7 are isometric and elevational views, respectively, of part of the apparatus at the next stage of operation;

20

Figures 8 and 9 are elevation views illustrating the retraction of a push roller of the invention;

Figures 10 and 11 are isometric and elevational views of the part of the apparatus at the commencement of wrapping at a first wrapping station;

25

Figures 12 and 13 are views similar to Figures 10 and 11, respectively, at a further stage of the wrapping process;

30

Figures 14 is an elevation showing a first wrapping station at the end of the first wrapping cycle;

Figures 15 and 16 are elevational views showing the first/second stage in the transfer of a partially-wrapping load to a second wrapping station;

5           Figure 17 is an isometric view corresponding to Figure 16;

Figure 18, 19 and 20 are elevational and isometric views of the third/fourth stage of transfer;

10           Figures 21 and 22 are isometric and elevational views, respectively, of a second wrapping station showing wrapping in operation;

Figures 23 is an elevation showing the load fully wrapped end rotated to an off-load position;

15           Figures 24, 27 and 25, 26 are elevational and isometric views showing off-loading of the wrapped load from the second wrapping station;

20           Figure 28 is a side elevation of the overall apparatus at the end of the wrapping process;

Figure 29 is an isometric view of a four-way batten for use in the invention;

Figure 30 is an isometric view of a two-way batten for use in the invention;

25           Figures 31 and 32 shows the battens of Figures 30, viewed from the end and side respectively, in use; and

Figure 33 is an isometric view of a further embodiment of four-way batten.

### Detailed Description

Referring to Figure 1 of the drawings, an embodiment of the wrapping and pelletizing machine of the invention is shown in isometric view. A load or stack (1) to be wrapped and pelletized may comprise any goods, materials, cartons, boxes and the like, which are typically transported by means of pallets. Suitably, the maximum dimensions of the load (1) are from about 500 - 1600 mm in width and from about 1000 - 2200 mm in height.

The embodiment of the machine shown in Figure 1, looking at it from right to left, comprises of:

- An input conveyor (2)
- A batten pick and place unit (3)
- A buffer conveyor section (4)
- A first wrapping station (5)
- A transfer means (6)
- A second wrapping station (7)
- An off-loading means (8)
- An output conveyor section (9)

In operation of the machine the load 1, comprising a stack of material, is first driven onto the buffer conveyor 4 (see Figure 2), from the packaging plant, using a delivery system e.g. driven conveyor rollers 2.

### **Batten Placing**

A fully automated pick and place unit 3 then commences operation. The pick and place unit suitably comprises an upright column 15 on which is mounted a vertically slidable arm 16, which carries a pick and place mechanism 1 (see Figure 4). The arm 16 is pivotally connected at one end to the column 15 and at its other end to

the pick and place mechanism 17. The pick and place mechanism picks up a pair of battens (10) from a stack or dispenser unit and places them in a parallel orientation, spaced substantially apart, on the top surface of the load 1. The pick and place mechanism may optionally include vacuum cups or mechanical grabs to grip the battens.

Referring to Figure 3, the load 1 is moved from the buffer conveyor section 4 onto a turntable 20 of the first wrapping station 5. This is achieved by means of a push-roller 11 mounted transversely on arms 12. The push-roller arms 12 are rotated by a hydraulic ram 19, about a pivot point, at the lower ends of the arms, causing the push-roller 11 to travel up vertically, above the level of the conveyor rollers comprising the buffer conveyor 4, and then horizontally along guide rails 13, disposed to each side of the buffer conveyor 4. When the load 1 is in the correct position on the turntable, the push-roller 11 is retracted into a stand-by position, so that the next load 1 can travel over it onto the buffer conveyor 4.

### **First Wrapping Station**

When the load 1 is located on the wrapping platform 20, (as shown in Figures 8 and 9), the first wrapping cycle can begin. Optionally, during the first wrapping cycle the pick and place mechanism 17 may hold the battens 10 in place on the top of the load 1, or a separate mechanism may be provided to achieve this.

In this embodiment the wrapping platform 20 is in the form of a rotary turntable, details of which are shown in Figures 8, 9, 14 and 16. The platform 20 is mounted on a scissors mechanism 22, which is shown in a collapsed position in Figures 8 and 9 such that the platform 20 is aligned with the second conveyor section 11, to receive the load from the conveyor 4.

Details of the wrapping platform 20 and scissors mechanism are shown most clearly in Figures 14 and 16. The turntable 20 and scissors assembly are mounted on

horizontally on the parallel channel rails 25, by means of a hydraulic transport ram 36, or a rack and pinion (not shown).

The scissors mechanism 22 comprises two pairs of crossed arms 26, 27, one pair being disposed to each side of the platform 20. The arms 26, 27 are pivotally connected, by a pivot 28, at their centres. The top ends of the arms 26, 27 support a horizontal frame 29 which carries the wrapping platform 20. The top left side (as shown in Figures 14 and 16) of the arms 26, are connected to a fixed pivot 32, whereas, the top right and the bottom ends of arms 26, 27 are connected to the wheels 24, which are free to slide horizontally in the guide channels 25. The top ends of arms 27 have wheels 30, which run in channels in the frame 29. Thus, by expanding a ram 36, which is connected to the arms 26, 27, the wheels 24 are brought closer together to cause the scissors mechanism 22 to expand to raise the frame 29 vertically upwards.

The scissors mechanism 22 is shown completely collapsed in Figures 7, 11 and 13, with the platform 20 coplanar with the conveyor 11. It is shown partly raised in Figures 14 and 15. In this embodiment the stroke of the ram is about 353 mm which can move the wrapping platform 20 vertically through a height of about 650 mm. Thus, the platform 20 can locate different height loads correctly at the centre of a belt table 50 of the second wrapping means as will be described more fully below.

Referring to Figure 14, the wrapping platform 20 is mounted for rotation on the frame 29 by means of an externally driven slew ring 34. The slew ring 34 is fixed to the underside of the platform 20, and the slew ring rotates relative to an internal ring 35 fixed to the frame 29. The diameter of the slew ring 34 is typically about 400 mm. The slew ring 34 is driven by an electric or hydraulic motor (not shown), mounted on the frame 29 which engages with teeth on the external periphery of the slew ring. The speed of the motor is ramped up, and ramped down, for safe starting and stopping of the rotation of the wrapping platform 20.

Before wrapping is commenced at the first wrapping station 5, the rotary wrapping platform 20 is retracted, from the position shown in Figure 8, where it abuts the rollers of the buffer conveyor 4, to a wrapping position as shown in Figure 9, where the platform 20 is spaced from the rollers 4. The movement of the wrapping platform 20 is achieved by the hydraulic ram 36, which pulls the scissors mechanism 22 along the channel rails 25.

### First Wrapping Step

The first wrapping step is illustrated in Figures 10 and 11. The wrapping platform 20 is rotated, which in turn causes the load 1 (with battens 10 on top) to rotate about a vertical axis; in the direction of the arrows shown in Figures 10 and 11. Two film dispensers 40 are mounted on uprights 41, located to each side of the first wrapping station. The film dispensers 40 are of well known constructions and each may include a pretensioning unit through which plastics wrapping film 43 is fed and stretched. Two cut and start devices (not shown) for severing the film at the end of wrapping, e.g. of the kind shown in IE S80403, are mounted on the rotary wrapping platform 20.

At the start of the wrapping cycle, the free ends of the film 43 are attached to the cut and start devices on the wrapping platform 20, and the platform 20 is caused to rotate by the motor 37. This in turn unwinds the film 43 from the two dispensers 40, and causes the film to wrap around the load 1 (see Figure 10).

Optionally, as mentioned above, as the load 1 is rotated by the turntable 20, the arm 16, carrying the battens 18, may press down on the top of the load 1 to hold the battens 18 in position. This is possible because of a pivot between the arm 16 and the pick and place mechanism 17.

During the wrapping process, the wrapping film overlaps the bottom corners of the load 1. Wrapping continues at this location until all of the exposed side walls of

the load 1 are wrapped in the wrapping film 43. The film dispensers 40 are moved vertically upwards along the guide columns 41 to effect a complete wrapping, the individual strands being applied in a spiral configuration, with one strand overlapping the other (see Figure 11). At the top of the load 1, the wrapping material overlaps the top corners and also the ends of the battens 18 to secure the battens in position on top of the load 1. When the dispensers 40 reach the top of the load 1 (see Figure 12), an adjustable position sensor stops the upwards travel of the dispensers.

When adequate film 43 has been applied to the top of the load 1 the dispensers 40 travel back down to the bottom while continuing to wrap the load 1. When they reach the bottom, the cut and start mechanisms catch the films 43, cut the ends attached to the load 1, while holding the ends attached to the dispensers. At this stage, first station wrapping is complete and the load 1 has been fully wrapped around a vertical axis. At the bottom of the load the wrapping material overlaps the edge portions of the platform 20. In an optional arrangement, the arm 16 is then raised to release the pick and place mechanism 17. Simultaneously, a new load 1 is advanced towards the pick and place unit 3, as shown in Figure 5.

At the end of the first wrapping process, the rotary platform 20 orients the load so that it is at the correct orientation for transfer to the second wrapping station. Although not shown in the drawings, another optional feature is that the rotary platform 20 may be reduced in size to facilitate its disengagement from the load 1, in particular from overlapping portions of the wrapping material. This may be achieved by having the wrapping platform in two separate parts, which normally are spaced apart a short distance during wrapping, but which are brought together, e.g. by a hydraulic ram to reduce the overall size of the platform.

As shown in Figure 14, after first wrapping is completed, the scissors frame 29 is raised by ram 37, to ensure that the partially-wrapped load 1 is positioned centrally on a belt table 50 of the second wrapping station 7, to which it is transferred as described below.

## Load Transfer

The transfer means 6 operates to transfer the partly wrapped bale, by turning it through about 90°, from the first wrapping station 5 to the second wrapping station 7, as shown in Figures 15 and 20.

As shown in Figure 21, for example, the second wrapping station 7, comprises a rotary belt table 50, having two space-apart rollers 51, 52 around which an endless conveyor belt 53 travels. The belt table 50 is supported by a frame 54 (see Figure 15), which at its forward end has two depending brackets 55 welded thereto. The brackets 55 are pivotally connected, to respective parallel beams 56.

The forward ends of the beams 56 are pivotally connected to a main pivot or fulcrum point 60 of the transfer mechanism. Likewise, the first wrapping platform assembly 20, is mounted on a pair of spaced longitudinal beams 62 (see Figure 15), the rearward ends of which are pivotally connected, by brackets 61, to the main common fulcrum 60.

Transfer of the partly wrapped load 1 from the first wrapping station 5, to the second wrapping station 7, is achieved in four stages.

Firstly, the beams 56, carrying the belt table 50, are pivoted upwardly, through about 90°, by rams 70 about the main fulcrum 60, until the beams 56 and the belt table 50 are substantially vertical, as shown in Figures 15 to 17.

Secondly, as shown in Figure 16, the partly wrapped load 1 is now moved towards the belt table 50, by moving the whole wrapping platform assembly 5, on wheels 24, along rails 25. This movement is effected by a transport ram 36 which can move the assembly 5 forwardly and rearwardly. This horizontal movement of the

wrapping assembly, together with the vertical movement caused by the scissors mechanism 22, is important to correctly align the load 1 with the belt table 50, as described. The first wrapping assembly 5 is shown in its normal working position in Figure 15, and in the forward position, about to engage with the transfer means 6, in Figure 16.

At this point, the first wrapping platform assembly 20 is moved vertically and/or horizontally to accurately position the load 1 correctly at the centre of the belt table 50, between the rollers 51 (see Figure 17). If the load 1 is positioned off-centre on the belt table 50, it can cause the belt 53 to move off the rollers 52, 52 during subsequent operation.

Thirdly, as shown in Figures 18 and 19, the beams 62, carrying the wrapping platform assembly 20 are then caused to pivot upwardly, also about the main fulcrum 60 so as to pivot the platform 20, and the load 1, through about  $90^{\circ}$ , while simultaneously the belt table 50 is pivoted backwards, through about  $90^{\circ}$ , to its original horizontal position (see Figure 19). The load 1, which has been turned through  $90^{\circ}$ , now rests on the belt table 50.

Finally, the wrapping platform assembly 20, is now returned also to the horizontal position, as shown in Figure 20.

The mechanism for achieving the transfer referred to above is now described.

The cylinder of transfer ram 70 is pivotally connected to a bracket 72 fixed to the beams 56 carrying the belt table 50 (see Figure 15). The rod 71 of the tie ram 70 is pivotally connected to a triangular-shaped bracket 73 fixed to the beams 62 which carry the first wrapping platform 20. A second lower transfer ram has a cylinder 63

pivotally connected to a bracket 65, attached to a static support frame 89 for the belt table 50, and a rod pivotally connected to the bracket 73.

Figures 15 and 16 show the tie ram 70 having been extended to push the beams 56, and belt table 50, upwardly through 90°. This is achieved by locking the lower ram 63 so that it acts as an anchor for the tie ram 70 to work against.

In Figure 18, the tie ram 70 is shown locked, and the lower ram 63 pushes to rotate the beams 62, carrying the wrapping platform 20, upwardly about the common fulcrum point 60. This figure shows the rotation in mid-cycle, with the belt table 50 simultaneously rotating back towards the horizontal.

Figure 19 shows the completion of the rotation of the beams 62, and wrapping platform 20 from the horizontal to the vertical position, while the belt table 20 has returned to the horizontal.

Figure 20 shows the tie ram 70 beginning to move the first wrapping platform 20, on beams 62, back towards the horizontal, after disengagement of the wrapping platform from the bottom surface of the load 1, where the plastics wrapping has overlapped the edge of the wrapping platform 20. The lower ram 63 acts as a damper and eases the travel of the wrapping platform 20 as it returns to its original position.

After transfer of the load 1 onto the belt table 50, at the second wrapping station, the first wrapping platform 20 returns to the horizontal position, ready to receive the next load 1.

### **Second Wrapping Station**

The second wrapping station is illustrated in Figures 21 and 22

In this embodiment of the machine the second wrapping station uses a film dispenser 80 mounted on a wrapping arm 81 which rotates about a slew ring 83. The slew ring 83 is mounted centrally above the belt table 50, on a frame 82 and is powered by a hydraulic or electric motor (not shown). The film dispenser 80 is similar to the film dispenser 40 used in the first wrapping station, and also uses a pre-tensioning stretch unit. However in this case the dispenser is fixed in position on the wrap arm 81, as it is not required to move in a vertical direction. As the wrap-arm 81 rotates, the belt 53 of the belt table 50 is turned (by a hydraulic motor driving one of the rollers 51, 52), causing the load 1 to be rotated about a horizontal axis 84. At the start of the wrapping cycle the end of the film 43 is held by the cut and start mechanism and released when the film is fully attached on the load 1. The wrapping speed is ramped up, at the start of the wrapping, and is ramped down, at the end of the wrapping, to ensure a smooth wrapping cycle. At the end of the wrapping cycle the cut and start mechanism cuts the film 43 while still holding the end attached to the dispenser 80.

The rotation of the load 1 about a horizontal axis, while wrapping around a vertical axis ensures a complete wrapping of the load 1 in plastics film, including a complete covering of the battens 10. At the second wrapping station the film 43 is applied to the load 1 in a direction which is substantially perpendicular to that applied at the first wrapping station. Thus the load 1 has been wrapped around all three axes ensuring a very effective and tight wrapping of the load 1 which also renders it water-resistant and weatherproof, and also air-tight depending upon the amount of wrapping applied.

25

When the load 1 is fully wrapped, the belt 53 is turned, independently of the wrapping arm 81, until the battens 10 are aligned in a substantially vertical direction i.e. when the wide side of the load 1 is lying on the belt (see Figure 23 - the frame 82 and film dispenser 80 are omitted from this Figure).

30

After the second wrapping cycle is complete, the fully wrapped load 1 is tipped off the belt table 50 onto an off-loading ramp 88. Referring to Figures 24 and 25, this is achieved by extending tipping rams 86 to cause the belt-table 50 to rotate about a second pivot point 87 on the static support frame 89 (the belt-table 50 is pivotably mounted at both ends). As the load 1 comes into contact with the ramp 88 the weight of the load 1 pushes the ramp 88 down. The ramp 88 is mounted on arms 92 pivoted at 93 to the support 89. The downward movement and speed of the ramp 88, on arms 92, is carefully controlled by a pair of hydraulic accumulator rams 94, pivoted between the support frame 89 and the arms 92. The rams 94 are fitted with restrictors to ensure that the rate of descent of the ramp 88 is matched to the rate of descent of the tipping belt table 50. When the ramp 88 reaches its lowermost position, the belt table 50 pushes the load 1 slightly over-centre causing the ramp 88, which is pivotally mounted about its centre-point, to tilt back allowing the load 1 to roll under gravity onto an exit conveyor 95 comprised of conveyor rollers (see Figures 26 and 27). The load 1 travels along the conveyor 95 until either a previous load 1 on the conveyor 95, or a stop 98 at the end of the conveyors, halts it. The stop 98 consists of a box section running transversely of the end of the conveyor 95. The end of the box section 98, to the front of the machine, is located slightly below the top of the conveyor 95. The top surface of the box 98 is sloped, rising to the rear of the machine, such that as the ends of the battens 10 come in contact with the surface, forward movement of the load is stopped, while still allowing the forks of a fork-lift to enter under the load 1, between the battens 10, to remove the load 1 from the conveyor.

It will be appreciated that the wrapped load 1 has been lowered onto the ramp 88 with the battens 10 on the underside of the load 1 to facilitate subsequent handling of the load 1 by a fork lift truck or the like as described below.

Details of the battens 18 which may be used in the invention are now described with reference to Figures 29 to 33.

Figure 29 shows a four-way batten 10. The batten may be made of wood or metal, or extruded from a plastics material and has an elongate shape. The top surface of the batten, which abuts the underside surface of the load 1, is planar. The bottom surface of the batten, which is intended, in use, to rest on the ground is provided with two side fork-entry openings 109. Thus, when two battens are arranged in parallel spaced-apart relationship on the underside of the load 1, as shown for example in Figure 26, a fork lift truck operator has the option of inserting the forks from the front or rear, or between the battens from either side, that is parallel to the battens, or alternatively to insert the forks from the side through the openings 109, that is in a direction substantially perpendicular to the battens 108. Suitably, the dimensions of the four-way batten are about 120 mm in width, 100 mm in depth, and 1100 mm in length, but may vary in dimensions depending upon the width of the load/stack to be wrapped.

Figure 30 shows a simple two-way batten 10, that is a batten suitable for fork entry from the front or rear of the load 1 only, but not from the side. This batten may be smaller in size than the four-way batten, typically having dimensions of about 100 mm x 80 mm x 1100 mm, but may vary to suit the width of the load. A similar two-way batten is shown in Figure 33, but formed with a cut-away portion in the lower side thereof.

Figures 31 and 32 show the battens 10 in use on the underside of the load 1. In the case of the two-way batten shown in Figure 34, it will be noted that the several layers of plastics film 43 holds the battens 10 firmly in place. The plastics film 43 shrinks itself into the openings 109 such that in use the forks of a fork lift truck may enter the openings 109 without tearing the film 43. However, because of the multi-layers of film 43 used in the wrapping process the battens 10 will still be held firmly even if some of the film 43 is torn by the forks. It will be noted that the bottom profile of the batten 10 is such as to provide ridges 101. The purpose of these ridges is to reduce the contact area of the batten with the ground, so as to reduce abrasion of the film 43.

As shown in Figures 30, 31 and 33 the ends of the battens have inclines 48, that is the end walls may be inclined at about 70° to the horizontal. Again, this assists in reducing abrasion or tearing of the film 43 in the corner regions of the load 1.

5

Modifications may be made to the method and apparatus described above without departing from the scope of the invention claimed.

For example, at the first wrapping station, the embodiment described utilises  
10 two film dispensers 40 mounted on uprights 41. The use of two film dispensers reduces the wrapping cycle time. However, the two dispensers 40 could be replaced by a single film dispenser 40.

Also, at the first wrapping station the wrapping platform 20 is in the form of  
15 a rotary turntable, which rotates relative to the fixed film dispensers 40. It would be possible to utilise a non-rotatable platform, but have the film dispensers 40 rotate around the platform 20, for example utilising an arrangement similar to that described in the second wrapping station.

20 Modifications may also be made to the wrapping arrangement at the second wrapping station. For example, the belt table 50 may be rotated, in well known manner, about a vertical axis relative to one or more fixed film dispensers 401.

Furthermore, at either, or both of the first and second wrapping stations,  
25 there could be contra-rotation of the wrapping platform 20 (and/or belt table 50) relative to a rotatable dispenser or dispensers 40, for example as described in PCT WO 99/64297.

The words “comprises/comprising” and the words “having/including” when  
30 used herein with reference to the present invention are used to specify the presence of

Claims

1. A method for wrapping loads (1) in a wrapping material (43) comprising the steps of:

- 5 (a) placing at least two battens (10) in a spaced, substantially parallel orientation on one surface of the load (1); and
- (b) at least partially wrapping the load in a wrapping material (43) such that the battens (10) are at least partially enveloped in the wrapping material (43) and held in place on the surface of the load (1).

10 2. A method as claimed in claim 1 in which the load (1) is at least partially wrapped by establishing relative rotational motion between the load (1) and a dispensing means (40) for the wrapping material.

15 3. A method as claimed in claim 1 for wrapping loads (1) of goods or materials in a wrapping material, such as a plastics film (43), which comprises placing at least two battens (10) in a spaced substantially parallel orientation on one surface of the load (1), at least partially wrapping the load in a wrapping material (43) by rotating the load (1) relative to dispensing means (40) for the wrapping material (43), and/or rotating the

20 dispensing means (40) around the load, to envelop the battens (10) in the wrapping material and to hold the battens (10) in place on the surface of the load (1), the battens (10) being placed apart to support the load (1) and being adapted to receive therebetween the forks of a fork-lift truck for transporting the load.

25 4. A method as claimed in any of claims 1 to 3 comprising placing the battens (10) on a top surface of the load (1), partially wrapping the load at a first wrapping station (5) with a wrapping material (43) including overlapping at least parts of the battens (10) with the wrapping material (43) to hold the battens (10) in position, turning the load through about 90° from the first wrapping station (5) to a second wrapping

30 station (6), and completing the wrapping of the load (1) at the second wrapping station (6), including enveloping the battens (10) in the wrapping material (43).

5. A method as claimed in claim 4, which comprises

- (a) placing at least two battens (10) on a top surface of the load (1);
- (b) before or after step (a) moving the load (1) onto a wrapping platform (20) at a first wrapping station (5);
- (c) rotating the wrapping platform (20) to rotate the load (1) relative to dispensing means (40) for wrapping material (43) and/or rotating the dispensing means (40) around the load (1) on the wrapping platform (20), to overlap at least part of the battens (10) to hold them in place on the load;
- (d) pivoting a wrapping table (50) at the second wrapping station (7) from a substantially horizontal position to a substantially vertical position;
- (e) before, after or simultaneously with step (d) moving the wrapping platform (20), with the load (1), horizontally and/or vertically to position the load (1) in a desired alignment with the wrapping table (50);
- (f) returning the wrapping table (50) back from the substantially vertical position to the substantially horizontal, and simultaneously turning the wrapping platform (20) from the horizontal position towards a substantial vertical position such that the load (1) is transferred from the wrapping platform (20) onto the wrapping table (50); and
- (g) rotating the load (1) about a substantially horizontal axis on the wrapping table (50) and simultaneously effecting a relative rotational movement, about a substantially vertical axis, between the load (1) and at least one film dispenser (40) to completely wrap the load (1) in wrapping material (43), including enveloping the battens (10) in the wrapping material (43).

6. Apparatus for wrapping a load (1) comprising a first wrapping station (5)

including a wrapping platform (20) to receive the load (1) to be wrapped, batten placing means for placing battens (10) on a surface of the load, wrapping material dispensing

means (40) at the first wrapping station (5), means for establishing relative rotational motion between the platform (20) and dispensing means (40), to partially wrap the load (1), including at least overlapping part of the battens (10), with the wrapping material, transfer means (6) for transferring the load, through about 90°, to a second wrapping station (7), and means at the second wrapping station for completing the wrapping of the load (1).

7. Apparatus as claimed in Claim 6, wherein the wrapping means at the first wrapping station includes means for rotating the platform about a vertical axis, and the wrapping means at the second wrapping station includes a belt table (50) for rotating the load (1) about a substantially horizontal axis and film dispensing means (40) for relative rotation about a substantially vertical axis to apply film to the load as it is rotated about a horizontal axis.

8. Apparatus as claimed in Claim 6 or Claim 7, wherein the belt table (50) at the second wrapping station (7) is pivotable from a normally horizontal position, through approximately 90°, to a position in which engages with a load (1) on the wrapping platform (20), and the wrapping platform (20) is pivotally mounted, such that as the belt table (50) is returned to its original horizontal position the wrapping platform (20) is caused to swing from a normally horizontal position, through approximately 90°, to transfer the partially wrapped load (1) onto the belt table (50) at the second wrapping station (7).

9. Apparatus as claimed in claim 8, wherein the wrapping platform (20) is moveable horizontally and vertically such that it may align a load (1) on the wrapping platform (20) with the belt table (50) when the belt table (50) is in a substantially vertical position.

10. Apparatus as claimed in claim 8, wherein the belt table (50) is pivotable about a main pivot (60) one by means of at least one transfer ram (70) from its normal horizontal position, and the wrapping platform assembly (20) is also pivotable about

the main pivot (60), by means of at least one transfer ram (63), through approximately 90° towards the belt table (50).

11. Apparatus as claimed in claim 10, wherein the transfer ram (70), for pivoting the belt table (50) is pivotably connected to the wrapping platform assembly (20) such that when the wrapping platform (20) is pivoted, through about 90°, by the second transfer ram (63), the belt table (50) is caused to pivot back to its original horizontal position to receive the partially wrapped load (1).

12. Apparatus as claimed in any of claims 6 to 11, wherein the batten placing means comprises a pick and place mechanism (3).

13. Apparatus as claimed in any of claims 8 to 11, wherein the belt table (50) is pivotably mounted at opposite ends such that it may be pivoted forwardly to engage with the load (1) on the wrapping table, and subsequent to the completion of wrapping at the second wrapping station (7), may be pivoted rearwardly to off-load the wrapped load (1).

[received by the International Bureau on 22 January 2001 (22.01.01);  
original claim 5 amended; new claims 14-20 added;  
remaining claims unchanged (4 pages)]

5. A method as claimed in claim 2, which comprises

- (a) placing at least two battens (10) on a top surface of the load (1);
- (b) before or after step (a) moving the load (1) onto a wrapping platform (20) at a first wrapping station (5);
- (c) rotating the wrapping platform (20) to rotate the load (1) relative to dispensing means (40) for wrapping material (43) and/or rotating the dispensing means (40) around the load (1) on the wrapping platform (20), to overlap at least part of the battens (10) to hold item in place on the load;
- (d) pivoting a wrapping table (50) at the second wrapping station (7) from a substantially horizontal position to a substantially vertical position;
- (e) before, after or simultaneously with step (d) moving the wrapping platform (20) with the load (1) horizontally and/or vertically to position the load (1) in a desired alignment with the wrapping table (50);
- (f) returning the wrapping table (50) back from the substantially vertical position to the substantially horizontal, and simultaneously turning the wrapping platform (20) from the horizontal position towards a substantially vertical position such that the load (1) is transferred from the wrapping platform (20) onto the wrapping table (50); and
- (g) rotating the load (1) about a substantially horizontal axis on the wrapping table (50) and simultaneously effecting a relative rotational movement, about a substantially vertical axis, between the load (1) and at least one film dispenser (80) to completely wrap the load (1) in wrapping material (43), including enveloping the battens (10) in the wrapping material (43).

6. Apparatus for wrapping a load (1) comprising a first wrapping station (5) including a wrapping platform (20) to receive the load (1) to be wrapped, batten placing means for placing battens (10) on a surface of the load, wrapping material dispensing

(60), by means of at least one transfer ram (63), through approximately 90° towards the belt table (50).

11. Apparatus as claimed in claim 10, wherein the transfer ram (70), for pivoting the belt table (50) is pivotably connected to the wrapping platform assembly (20) such that when the wrapping platform (20) is pivoted, through about 90°, by the second transfer ram (63), the belt table (50) is caused to pivot back to its original horizontal position to received the partially wrapped load (1).

12. Apparatus as claimed in any of claims 6 to 11, wherein the batten placing means comprises a pick and place mechanism (3).

13. Apparatus as claimed in any of claims 8 to 11, wherein the belt table (50) is pivotably mounted at opposite ends such that it may be pivoted forwardly to engage with the load (1) on the wrapping table, and subsequent to the completion of wrapping at the second wrapping station (7), may be pivoted rearwardly to off-load the wrapped load (1).

14. Apparatus for wrapping a load (1) comprising a first wrapping station (5) including a wrapping platform (20) to receive the load (1) to be wrapped, wrapping material dispensing means (40) at the first wrapping station (5), means for establishing relative rotational motion between platform (20) and dispensing means (40), to partially wrap the load (1) with the wrapping material, transfer means (6) for transferring the load, through about 90° to a second wrapping station (7), and means at the second wrapping station for completing the wrapping of the load (1), including a belt table (50) for rotating the load (1) about a substantially horizontal axis and film dispensing means (40) for relative rotation about a substantially vertical axis to apply film to the load as it is rotated about a horizontal axis, wherein the belt table (50) at the second wrapping station (7) is pivotable from a normally horizontal position, through approximately 90°, to a position in which engages with a load (1) on the wrapping platform (20), and the wrapping platform (20) is pivotally mounted, such that as the belt table (50) is returned to its original horizontal position the wrapping platform (20) is caused to swing from a

normally horizontal position, through approximately 90°, to transfer the partially wrapped load (1) onto the belt table (50) at the second wrapping station (7), and wherein the wrapping platform (20) is moveable horizontally and vertically such that it may align a load (1) on the wrapping platform (20) with the belt table (50) when the belt table (50) is in a substantially vertical position.

15. Apparatus as claimed in claim 14, wherein the belt table (50) is pivotable about a main pivot (60) one by means of at least one transfer ram (70) from its normal horizontal position and the wrapping platform assembly (20) is also pivotable about the main pivot (60), by means of at least one transfer ram (63), through approximately 90° towards the belt table (50).

16. Apparatus as claimed in claim 15, wherein the transfer ram (70), for pivoting the belt table (50) is pivotably connected to the wrapping platform assembly (20) such that when the wrapping platform (20) is pivoted, through about 90°, by the second transfer ram (63), the belt table (50) is caused to pivot back to its original horizontal position to received the partially wrapped load (1).

17. Apparatus as claimed in any of claims 14 to 11, wherein the belt table (50) is pivotably mounted at opposite ends such that it may be pivoted forwardly to engage with the load (1) on the wrapping table, and subsequent to the completion of wrapping at the second wrapping station (7), may be pivoted rearwardly to off-load the wrapped load (1).

18. A method for wrapping loads (1) in a wrapping material (43) comprising the steps of:

(a) creating at least two fork-entry openings in a spaced, substantially parallel orientation on one surface of the load (1); and

(b) at least partially wrapping the load in a wrapping material (43) such that the fork-entry openings are at least partially enveloped in the wrapping material (43) by establishing relative rotational motion between the load (1) and a dispensing means (40) for the wrapping material.

19. A method for wrapping loads (1) in wrapping material (43), which comprises
- (a) moving a load (1) onto a wrapping platform (20) at a first wrapping station (5);
  - 5 (b) rotating the wrapping platform (20) to rotate the load (1) relative to dispensing means (40) for wrapping material (43) and/or rotating the dispensing means (40) around the load (1) on the wrapping platform (20), to partially wrap the load in wrapping material;
  - (c) pivoting a wrapping table (50) at the second wrapping station (7) from a  
10 substantially horizontal position to a substantially vertical position;
  - (d) before, after or simultaneously with step (a) moving the wrapping platform (20) with the load (1) horizontally and/or vertically to position the load (1) in a desired alignment with the wrapping table (50);
  - 15 (e) returning the wrapping table (50) back from the substantially vertical position to the substantially horizontal, and simultaneously turning the wrapping platform (20) from the horizontal position towards a substantially vertical position such that the load (1) is transferred from the wrapping platform (20) onto the wrapping table (50); and
  - 20 (f) rotating the load (1) about a substantially horizontal axis on the wrapping table (50) and simultaneously effecting a relative rotational movement, about a substantially vertical axis, between the load (1) and at least one film dispenser (80) to completely wrap the load (1) in wrapping material (43).
  - 25
20. A method as claimed in Claim 19, characterised in that it includes the step of creating at least two fork-entry openings in a spaced, substantially parallel orientation on one surface of the load (1).

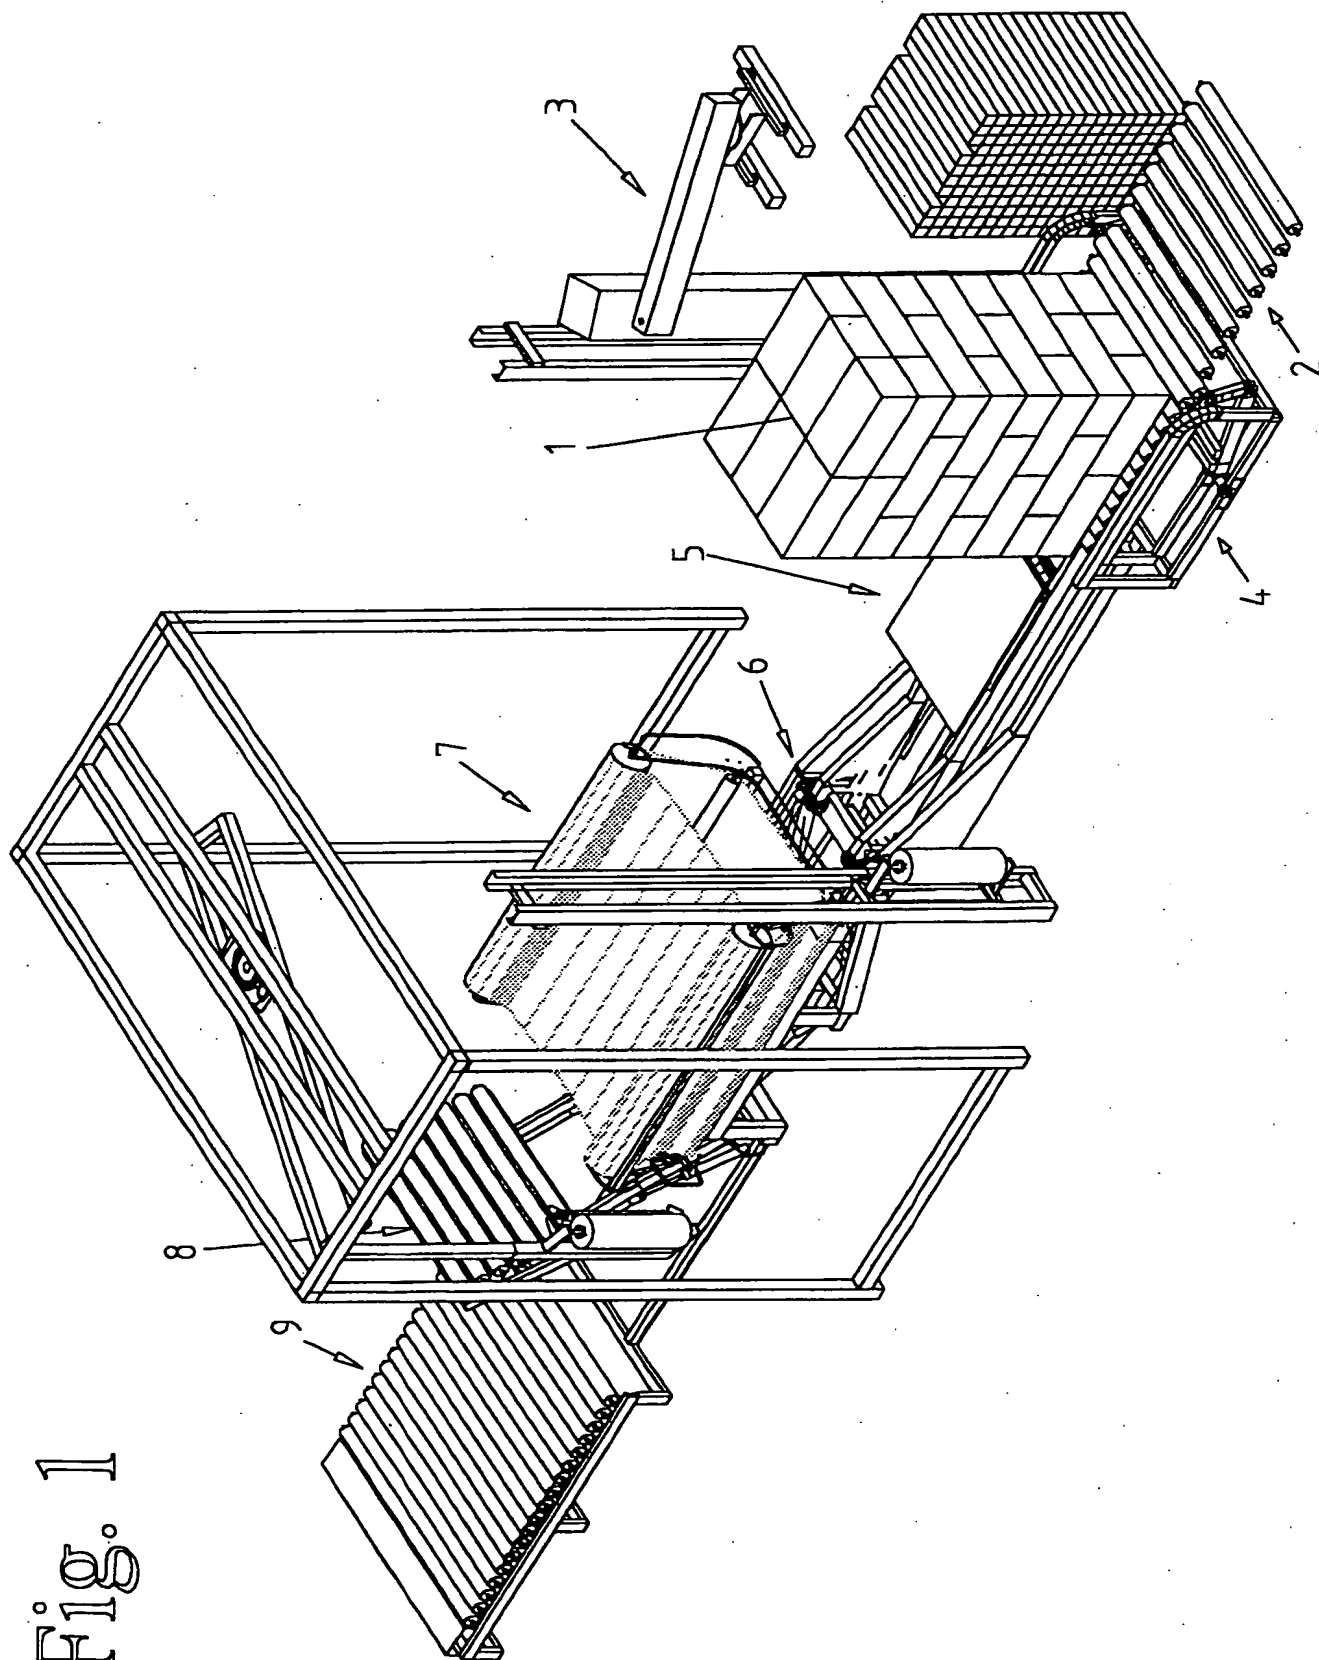


Fig. 1

2/32

Fig. 2


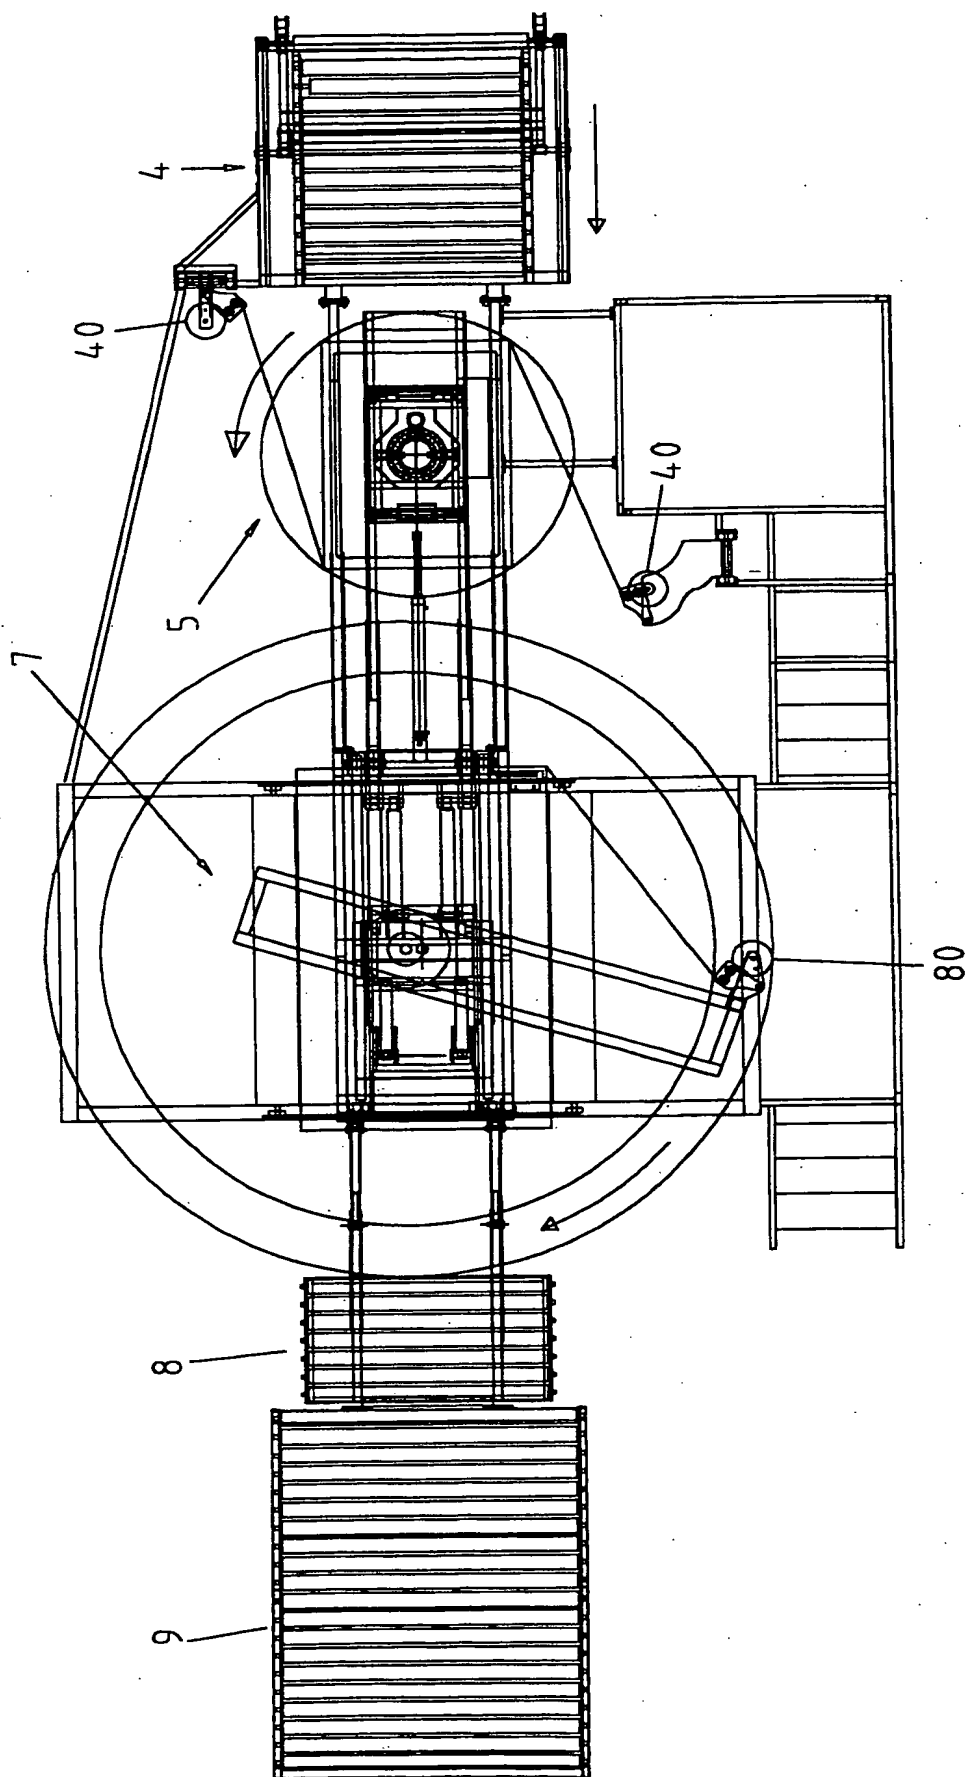


Fig. 3

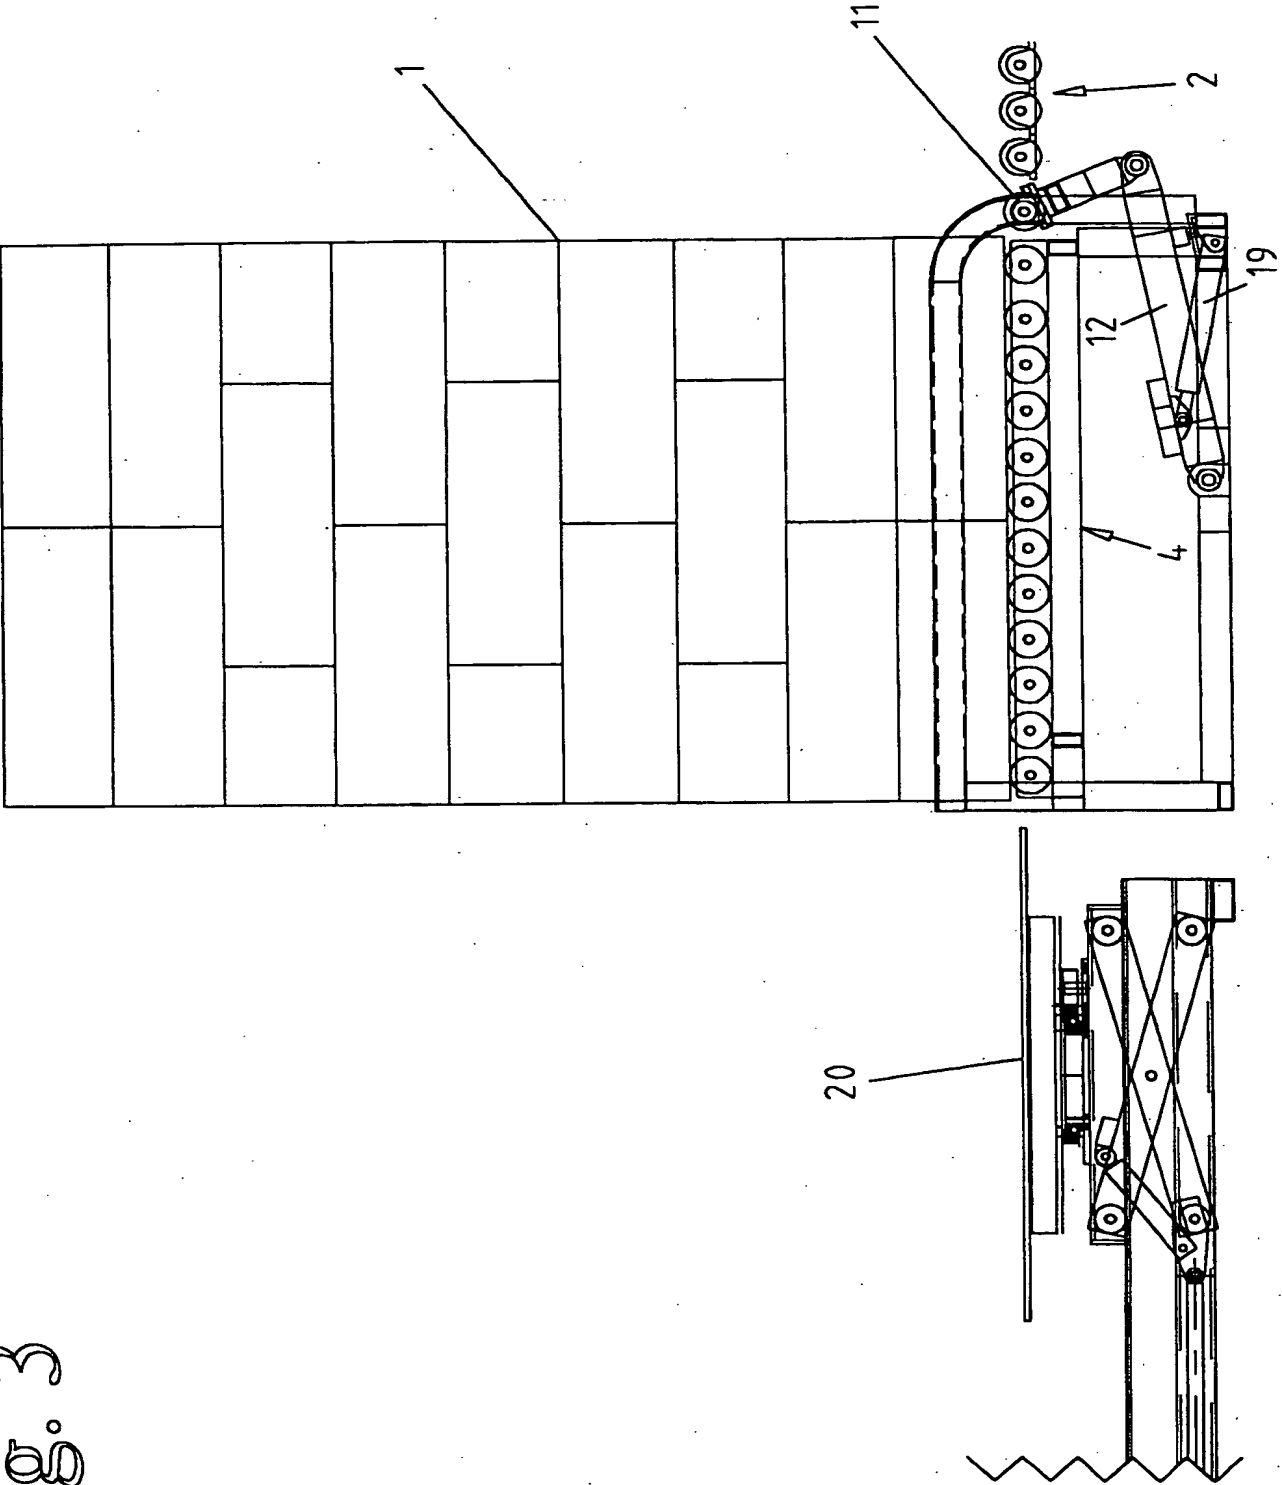

4/32



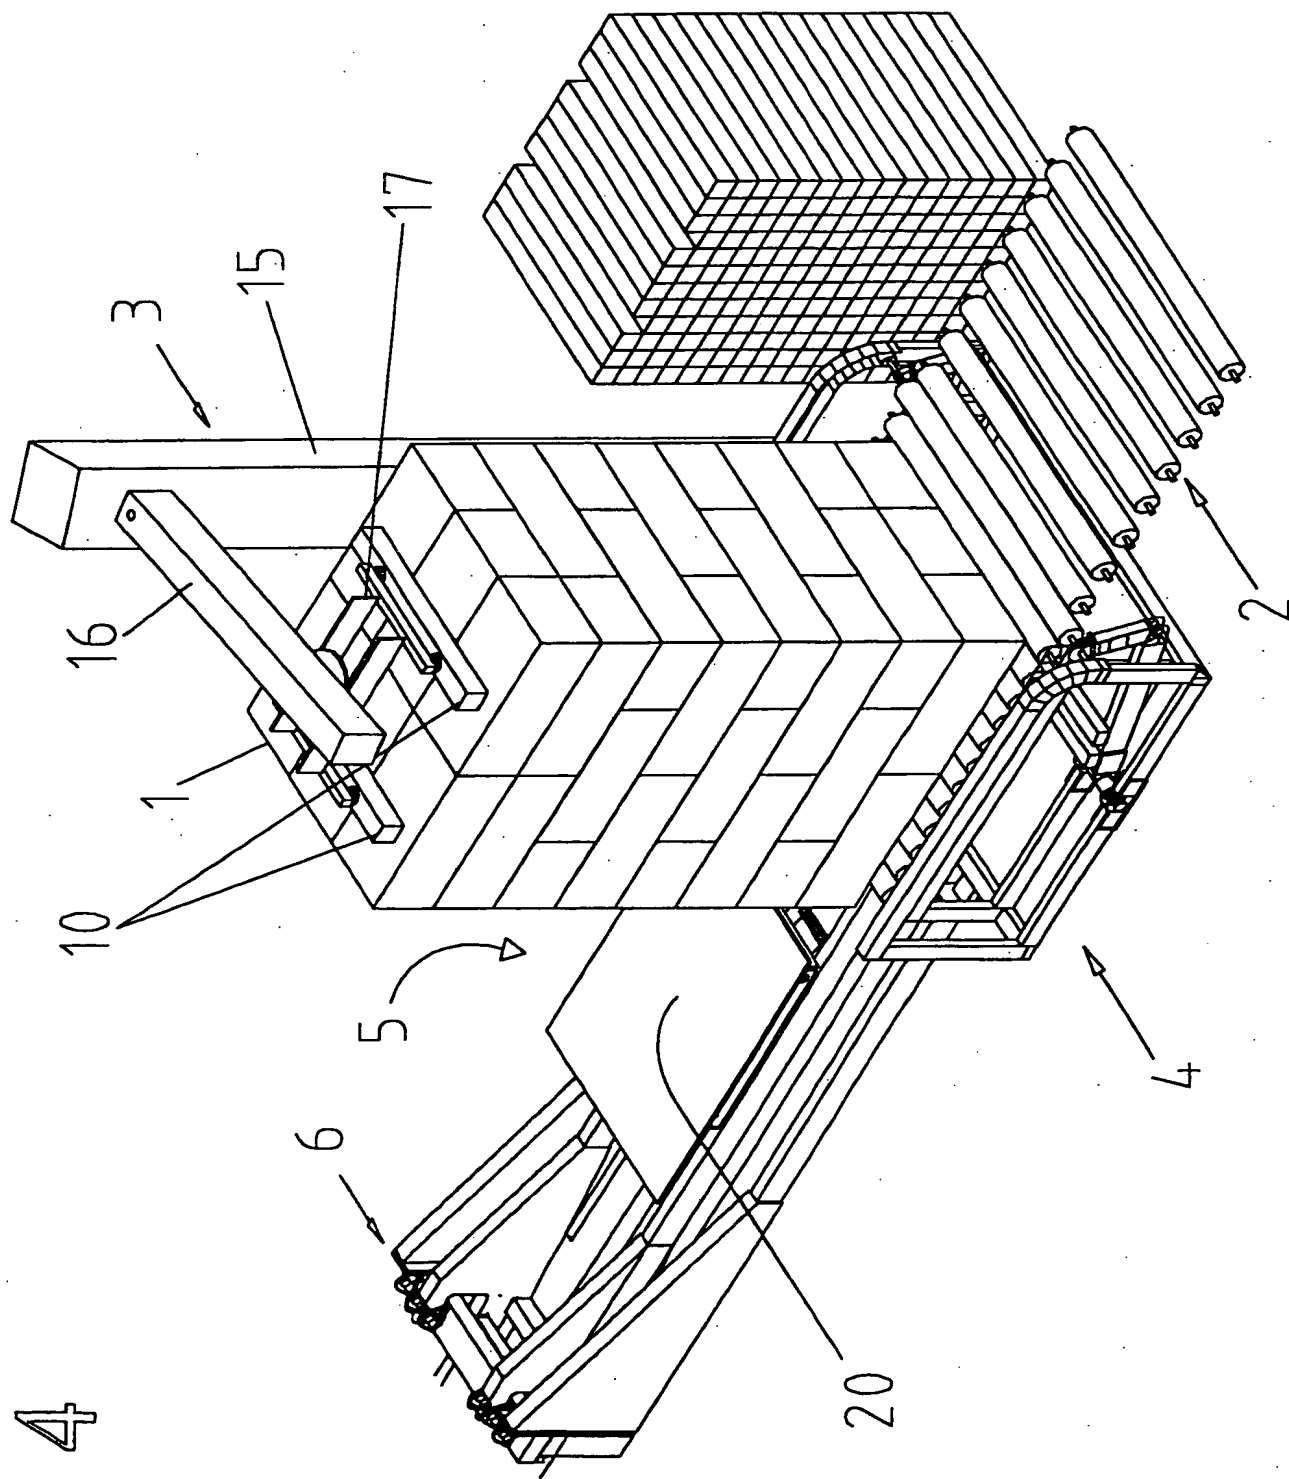


Fig. 4

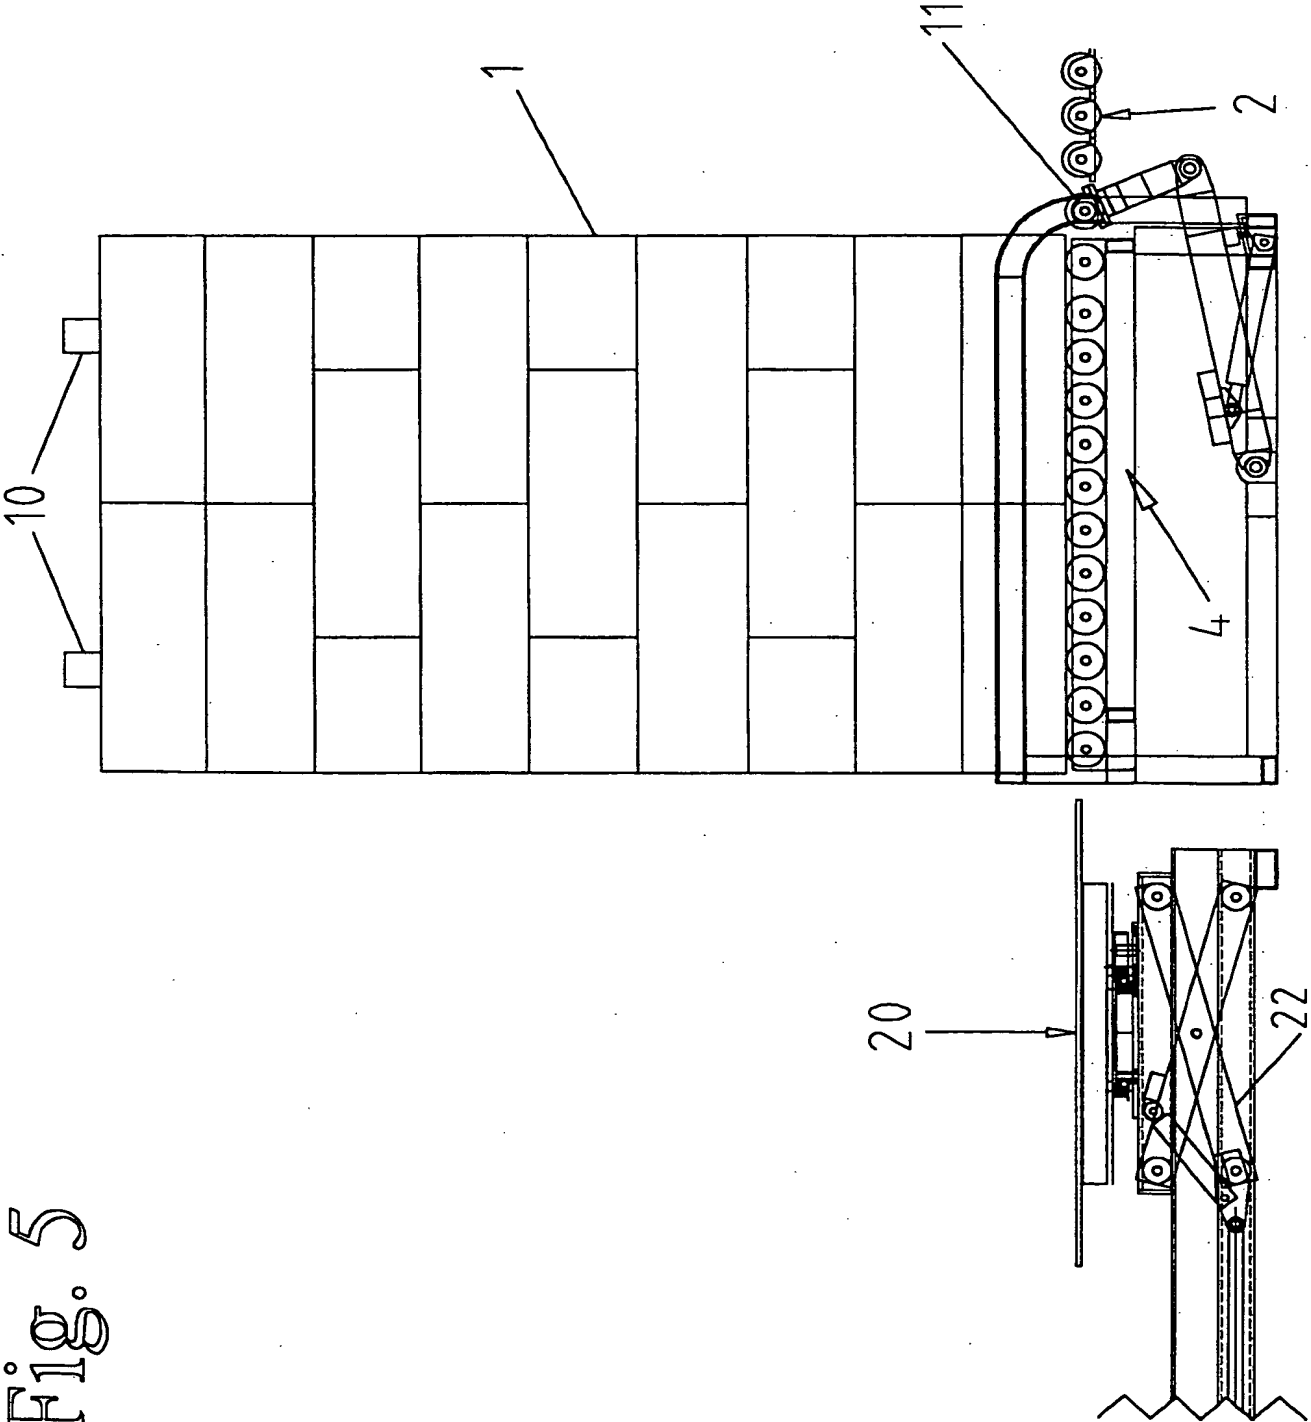


6/32

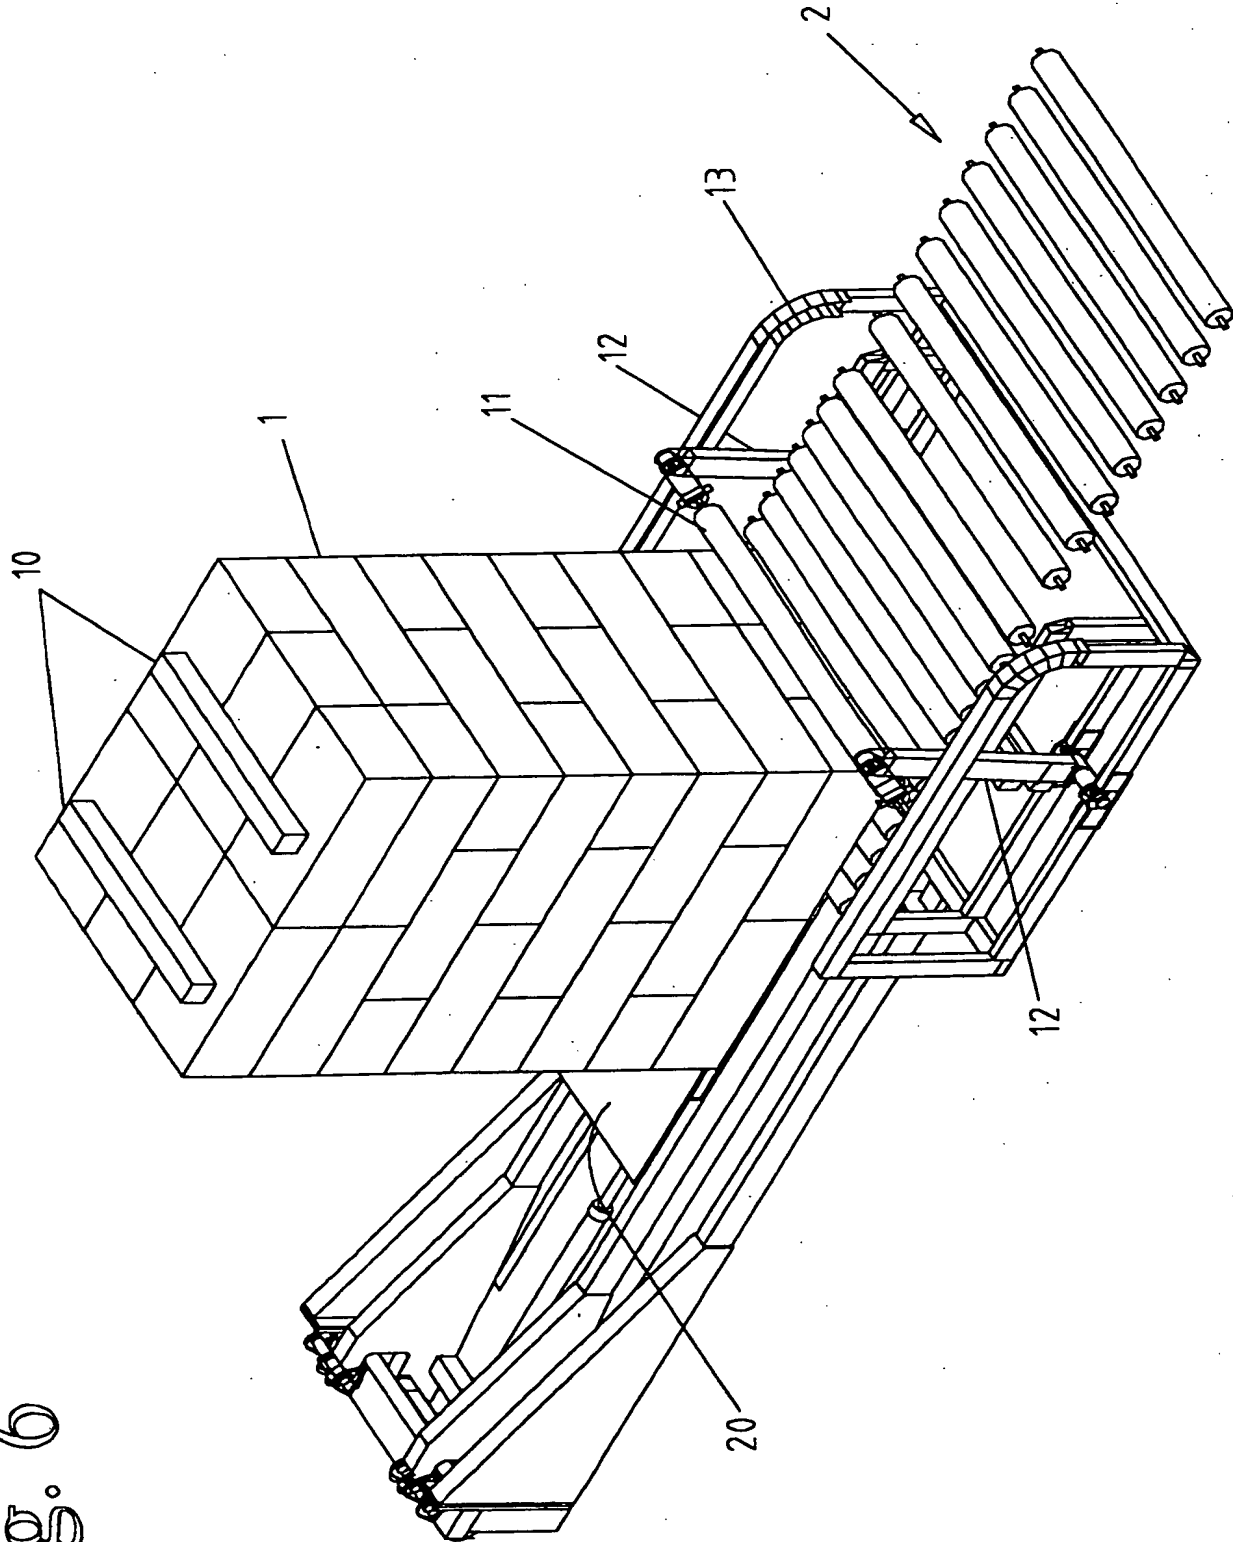


6  
b  
i  
L

7/32

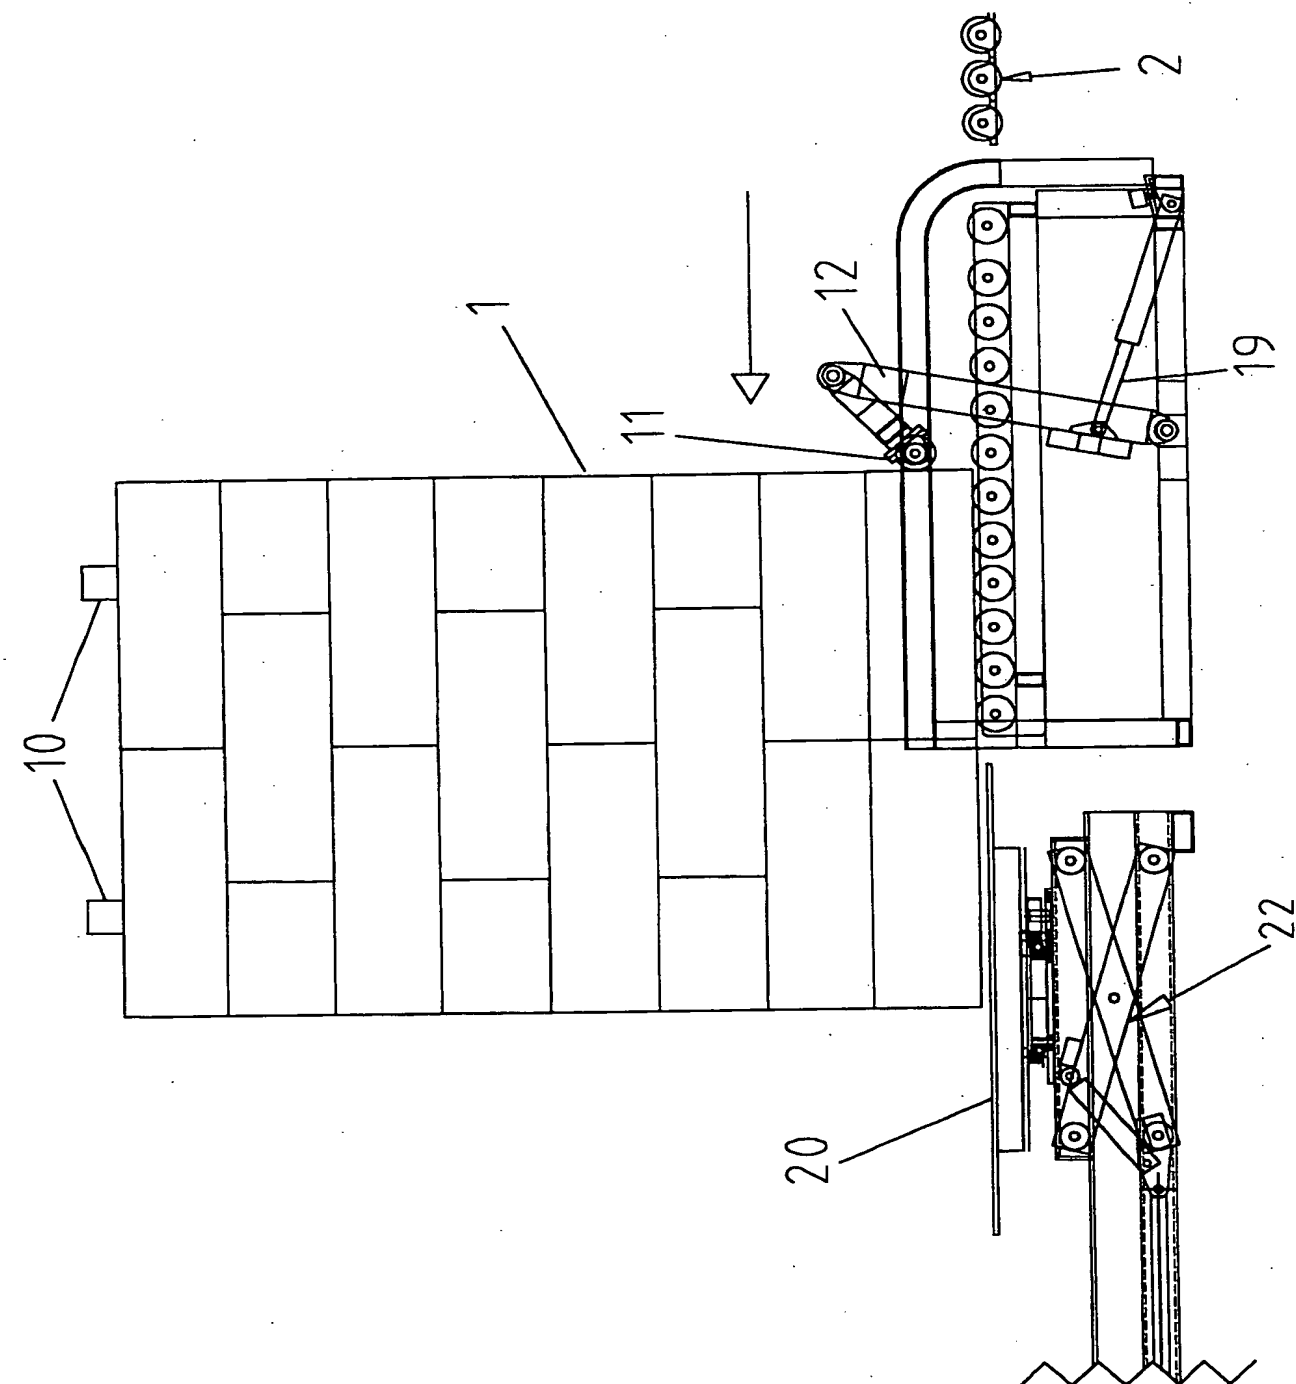


8/32

Fig. 8

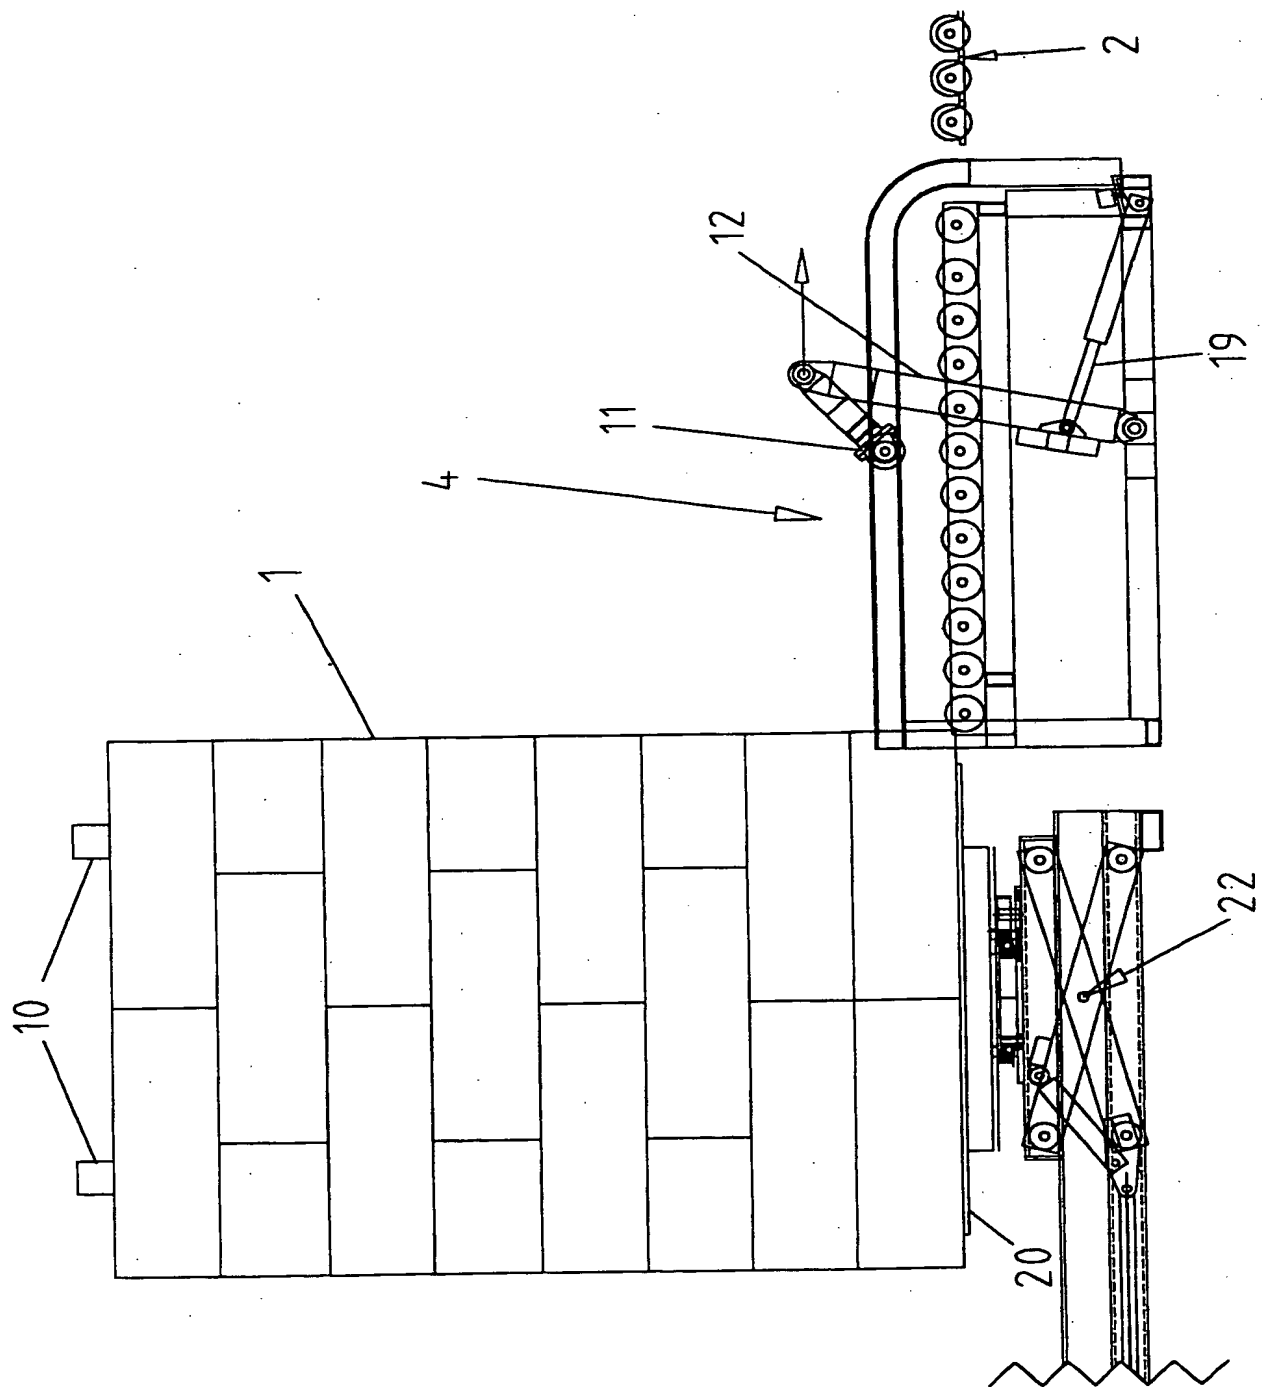


9/32

Fig. 9

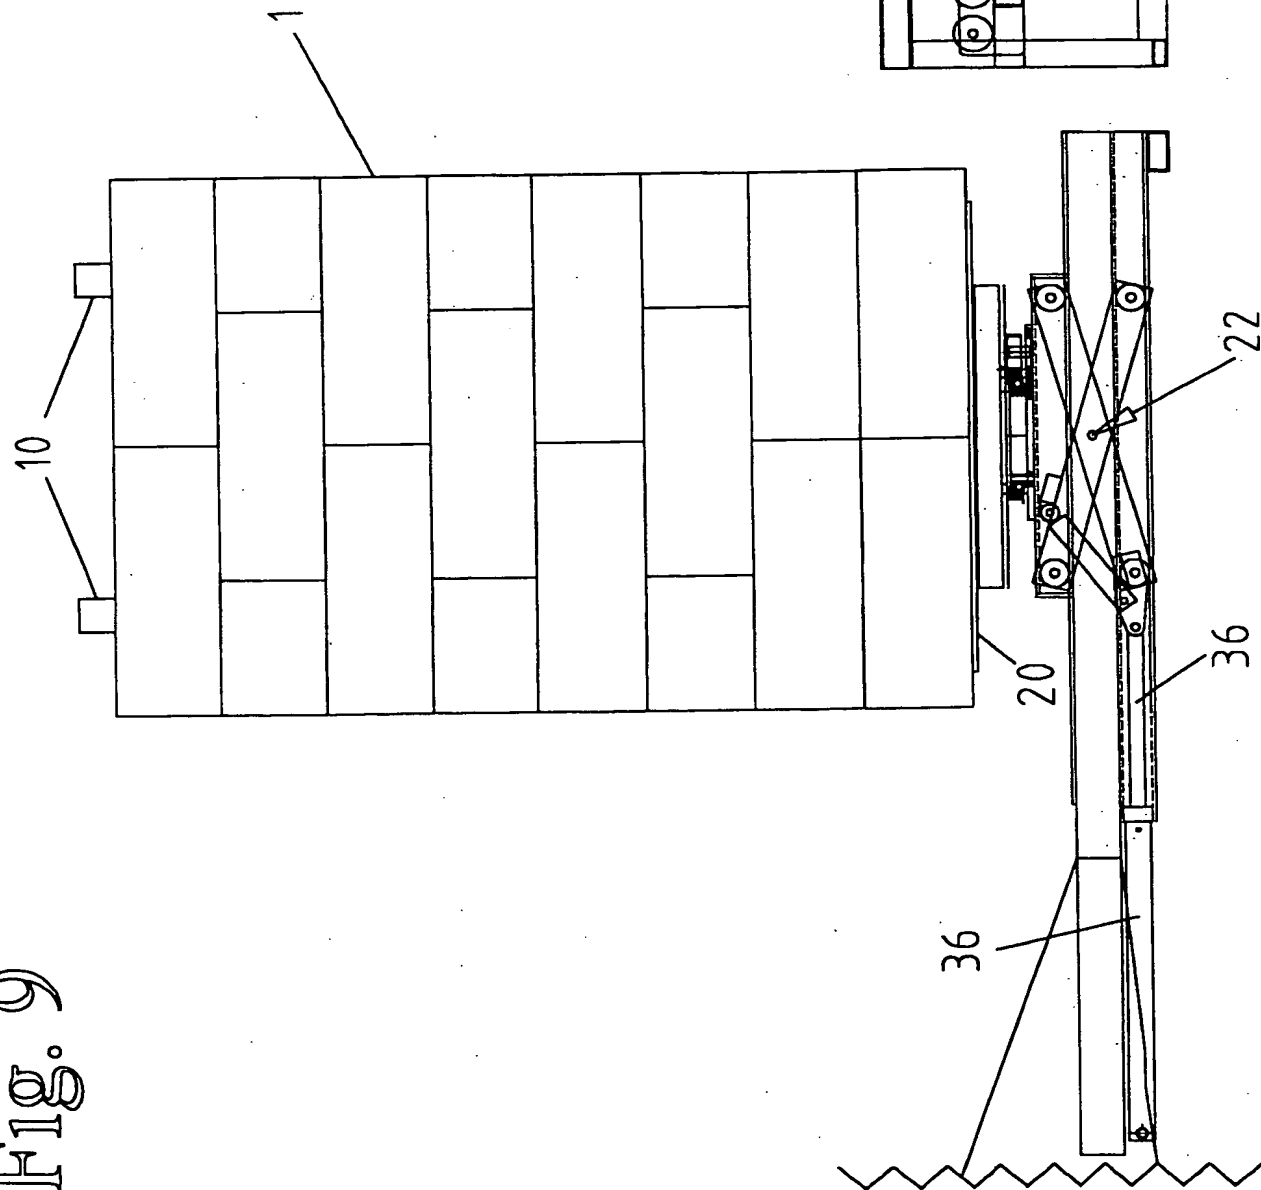

10/32

Fig. 10

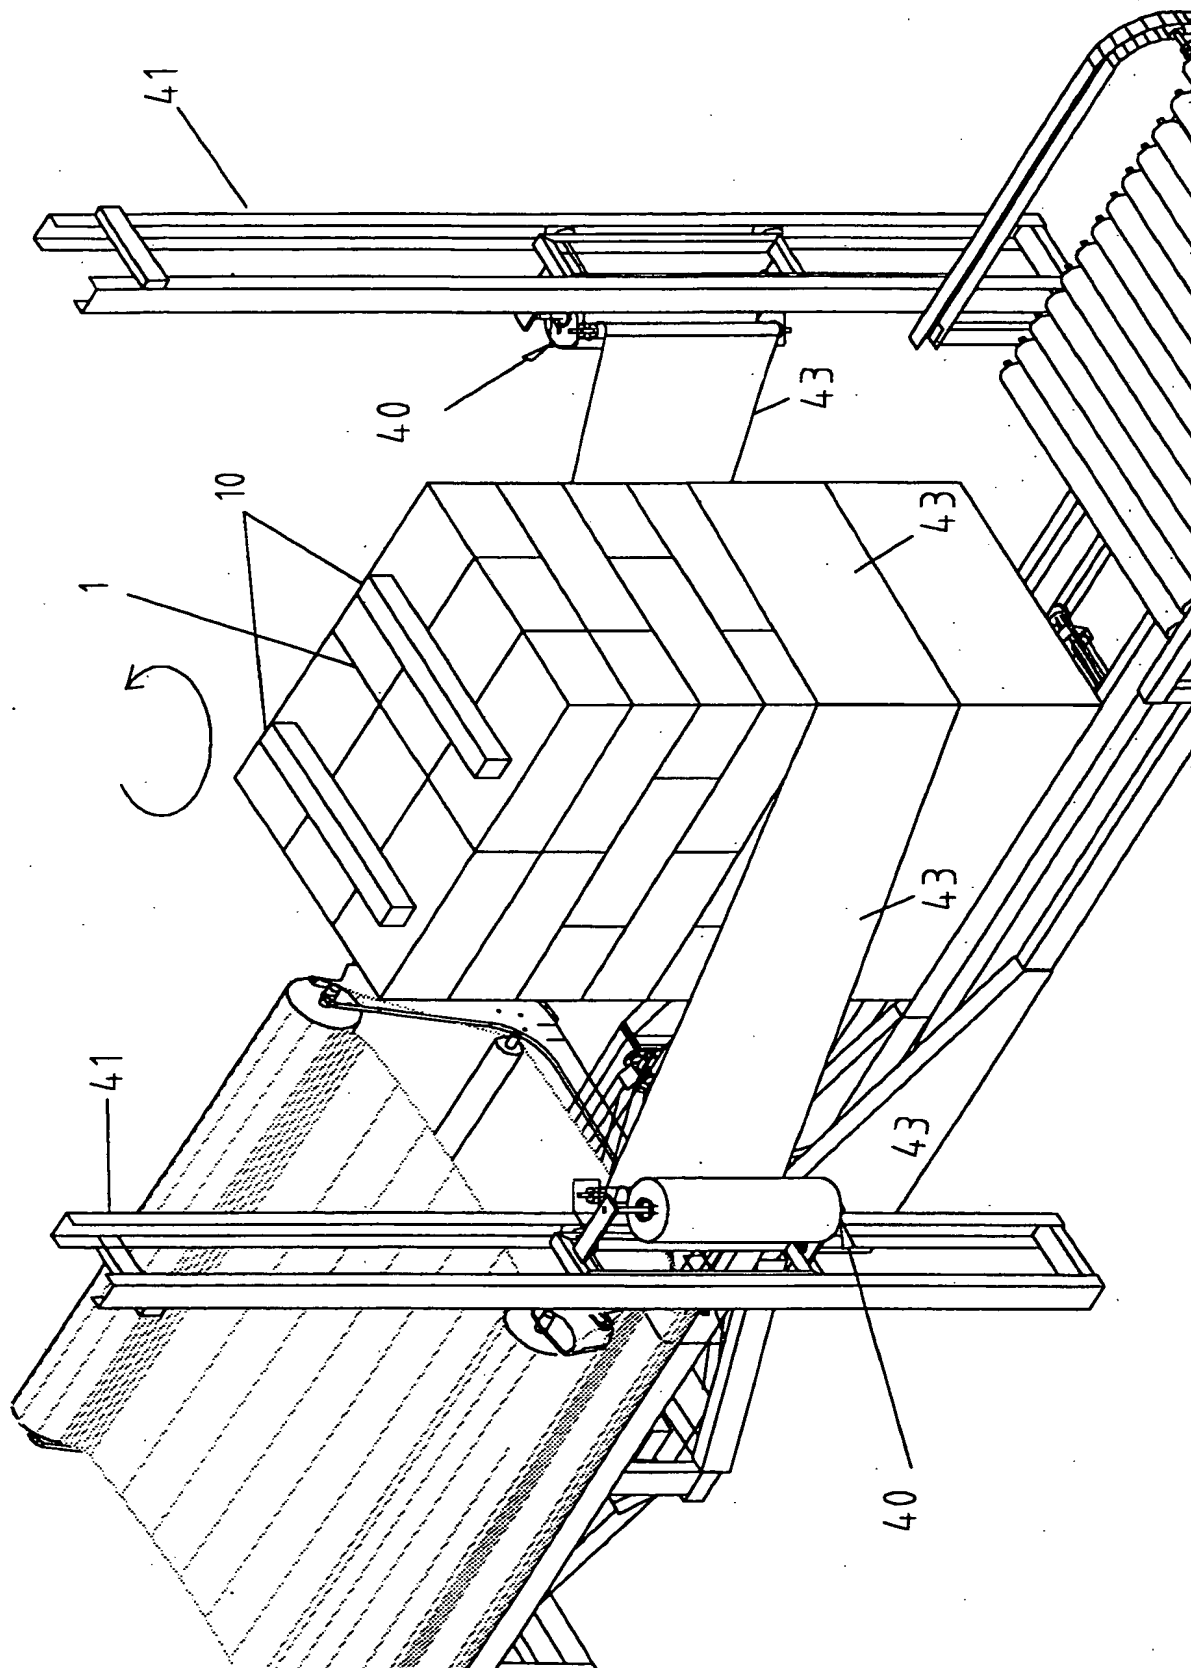

11/32



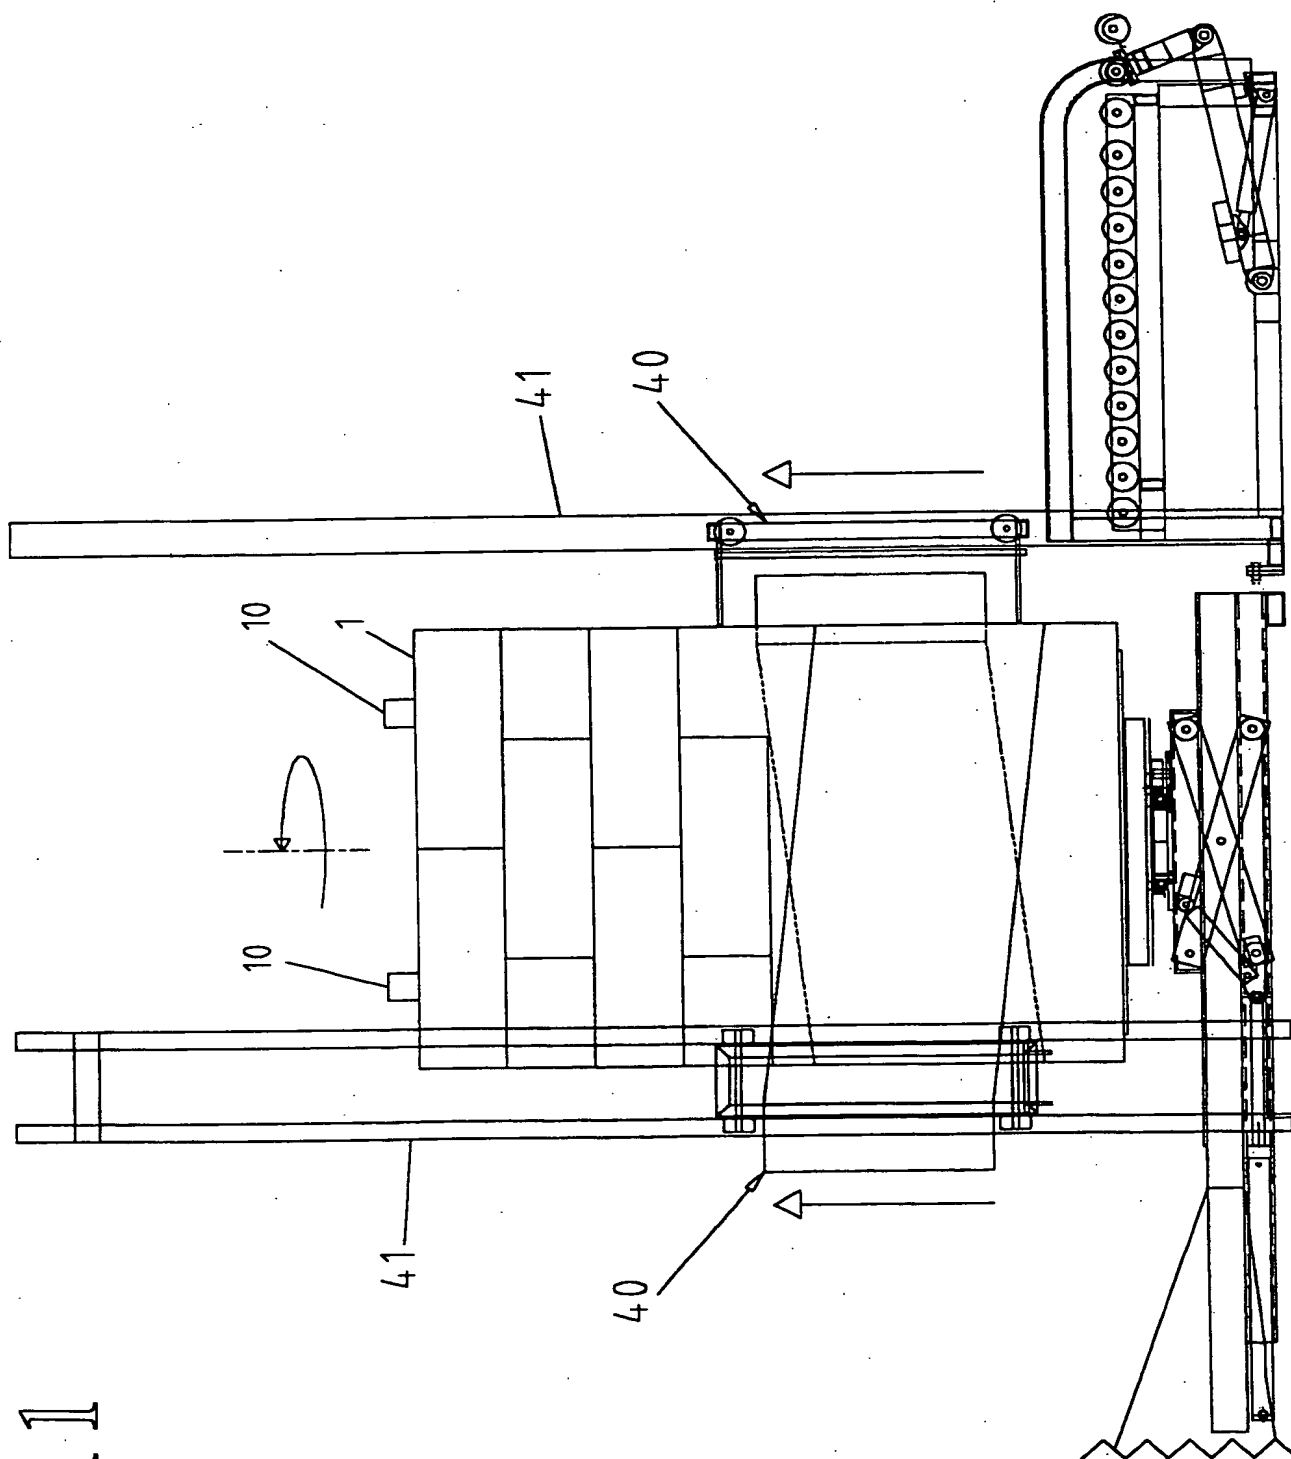


Fig. 11

Fig. 12

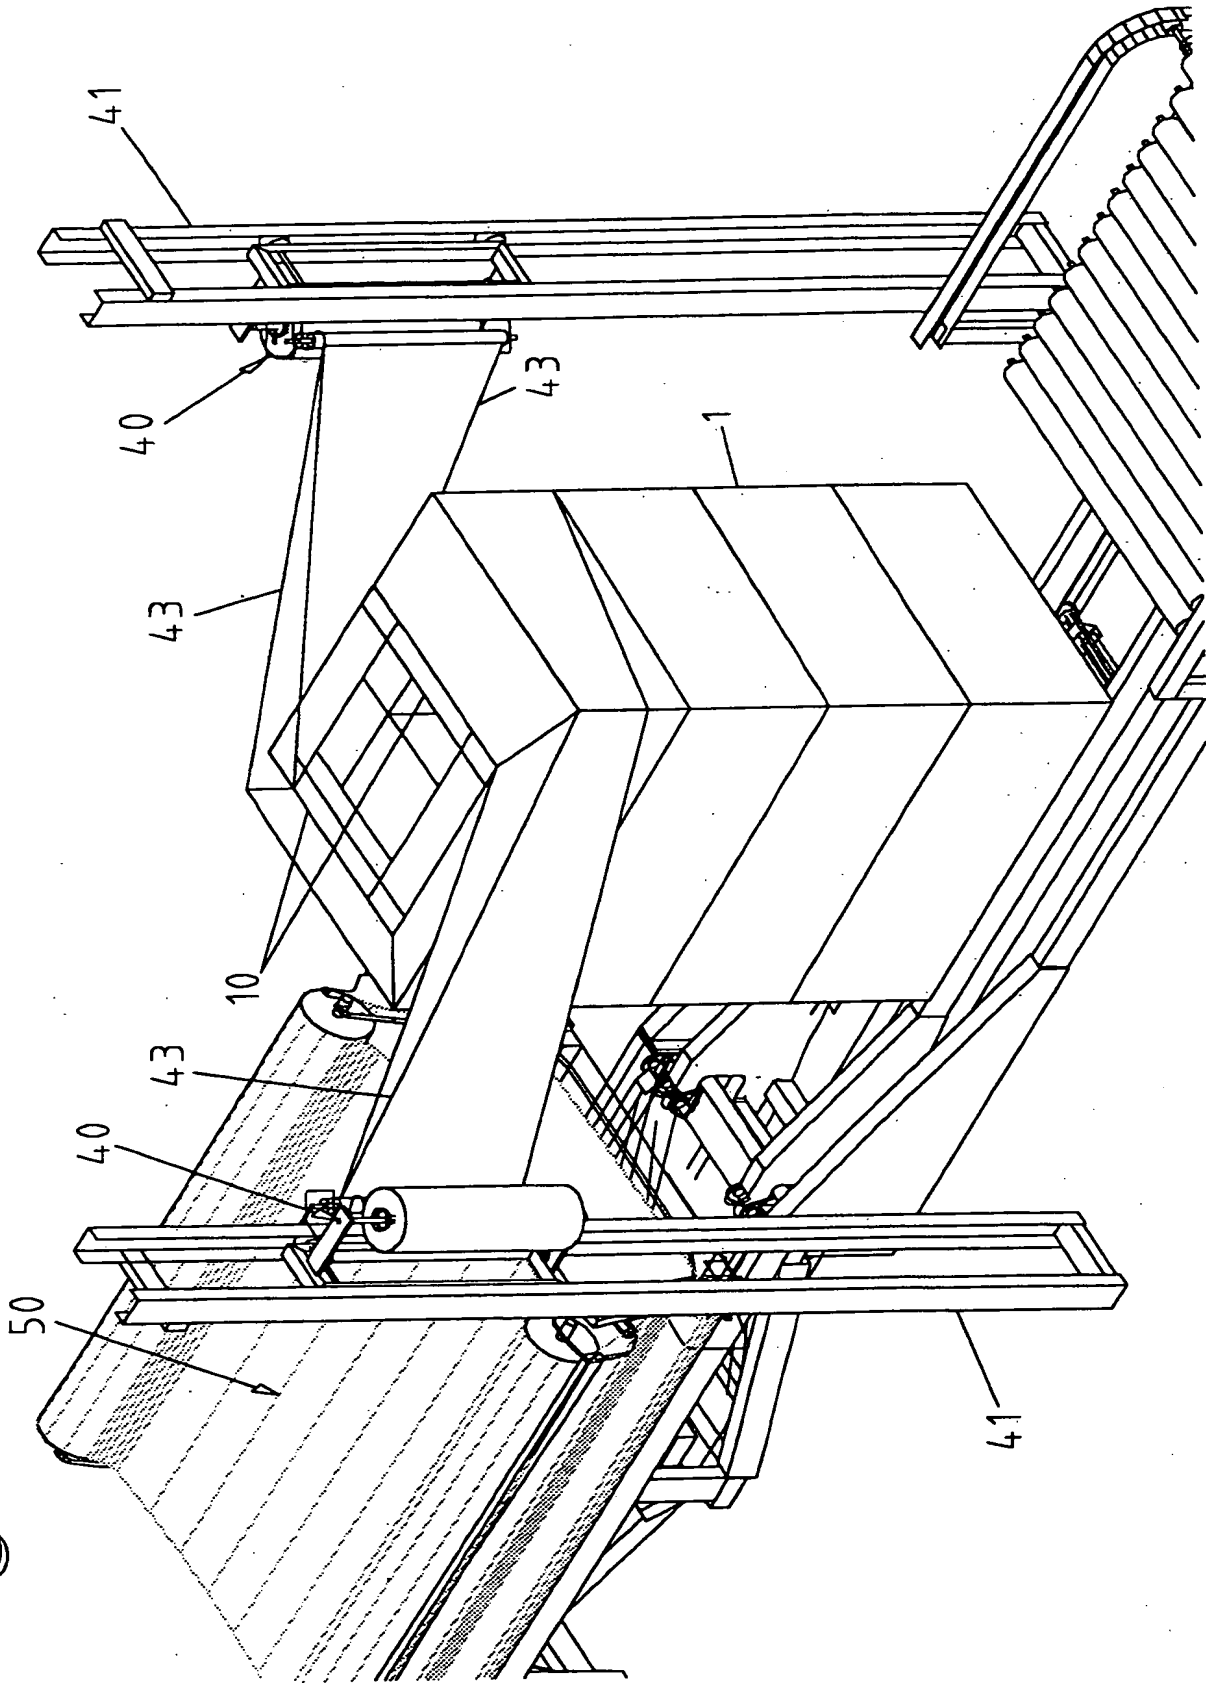


13/32

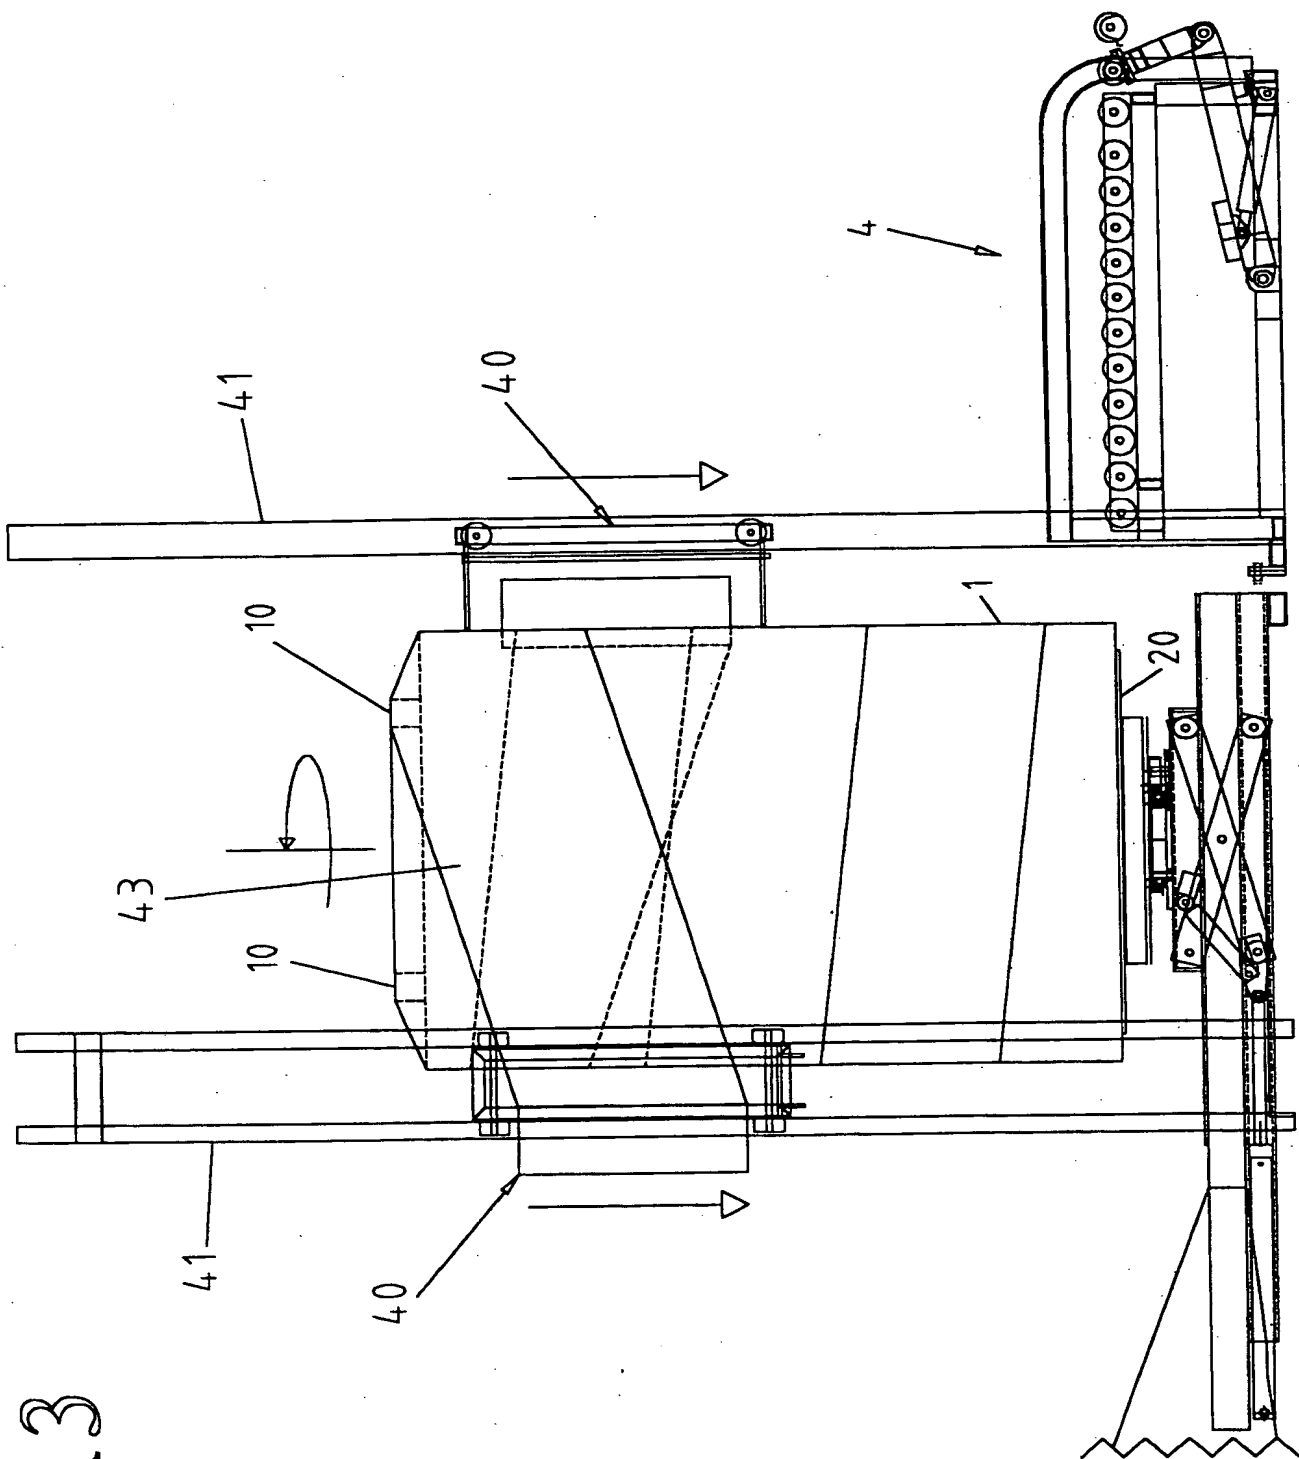


14/32

Fig. 14

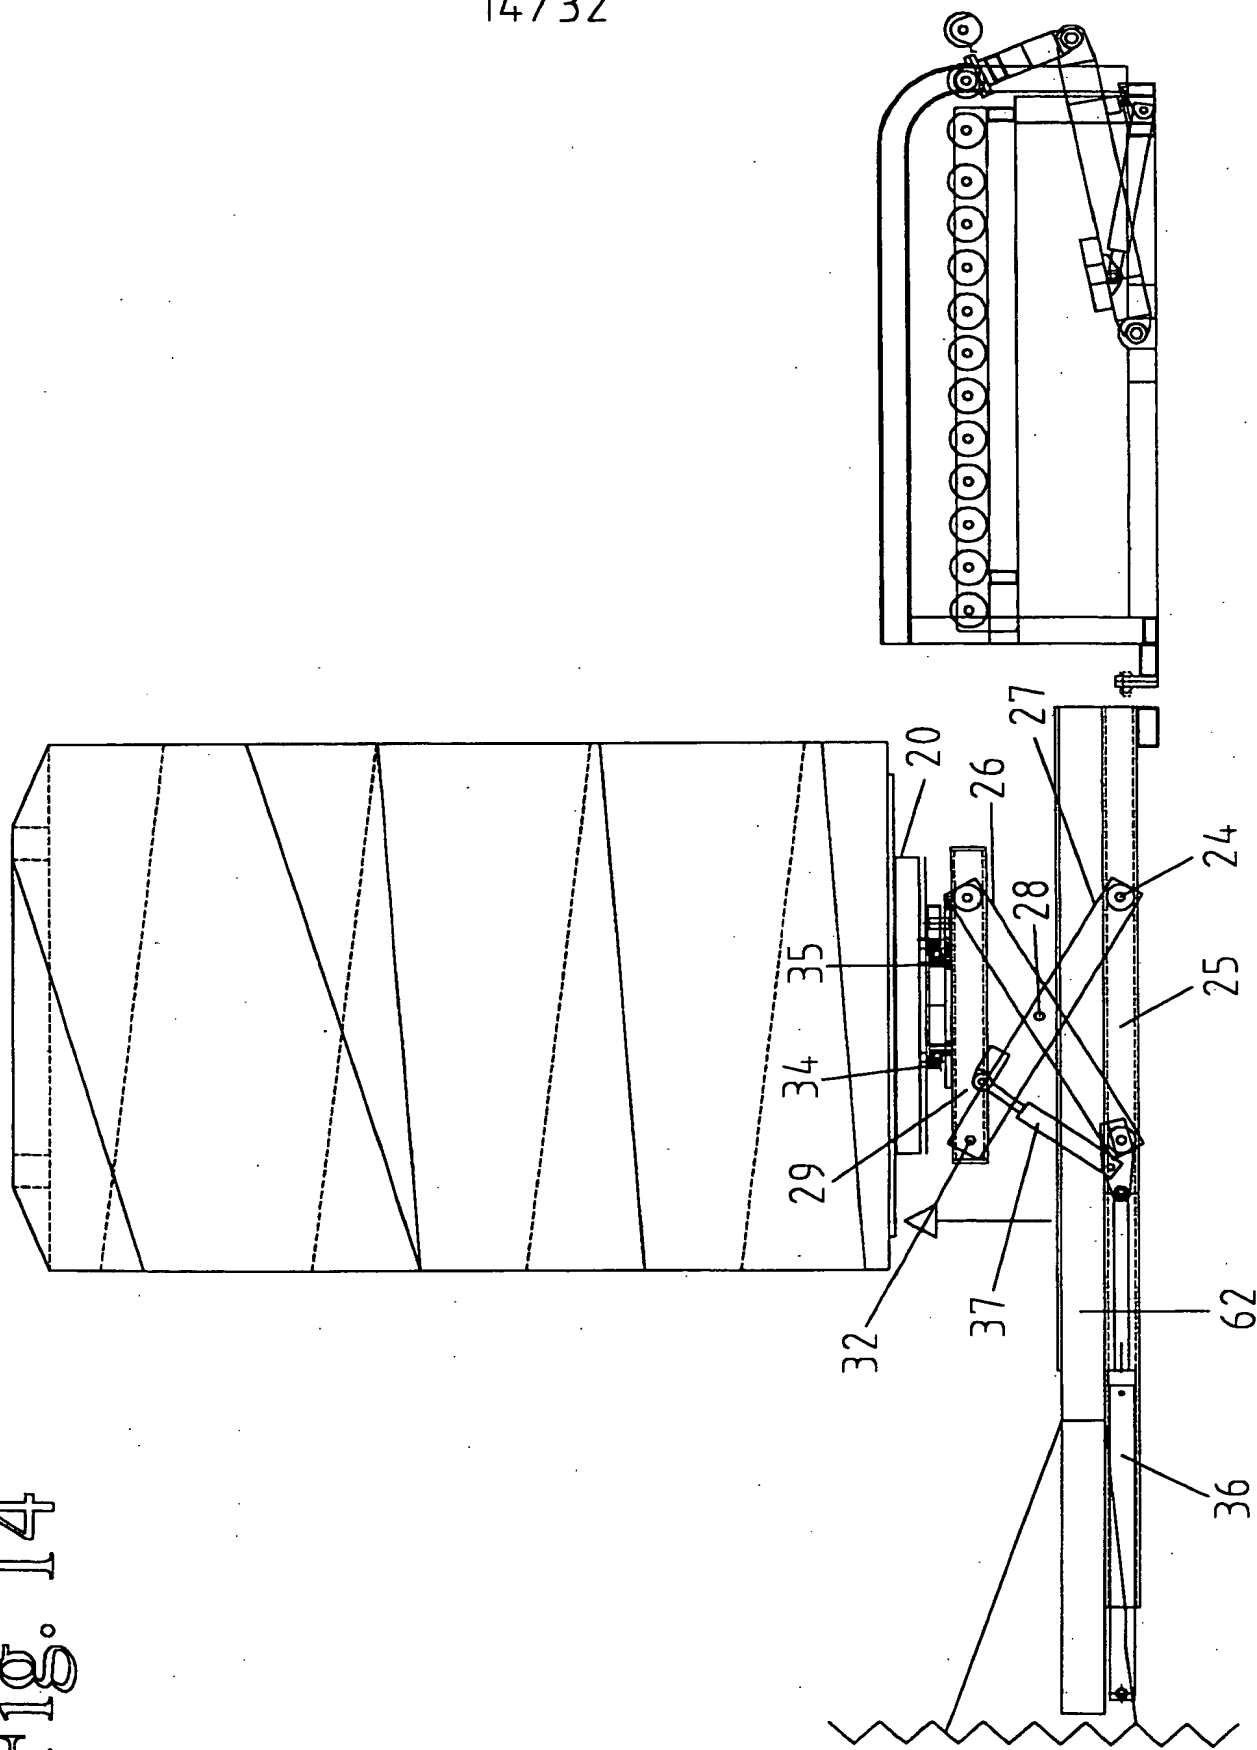


15/32

Fig. 15

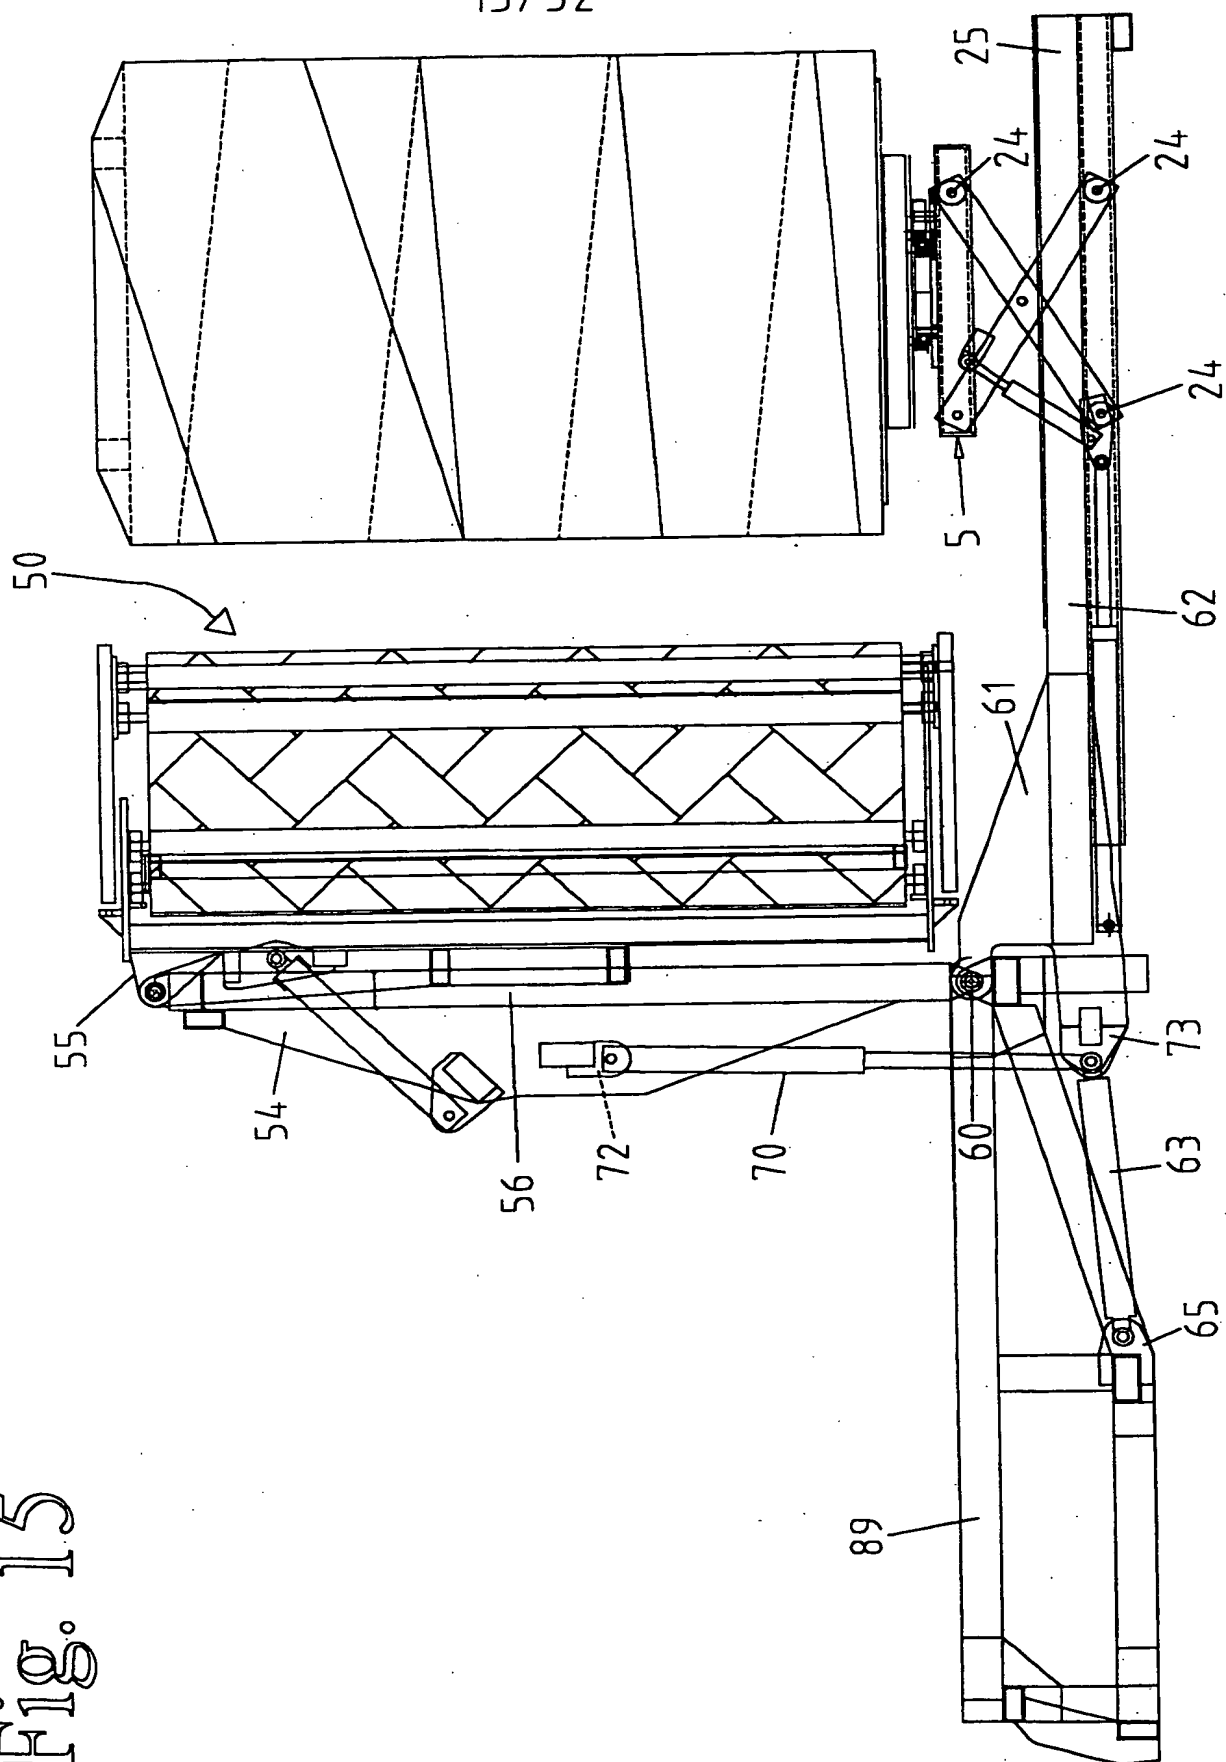

16/32

Fig. 16

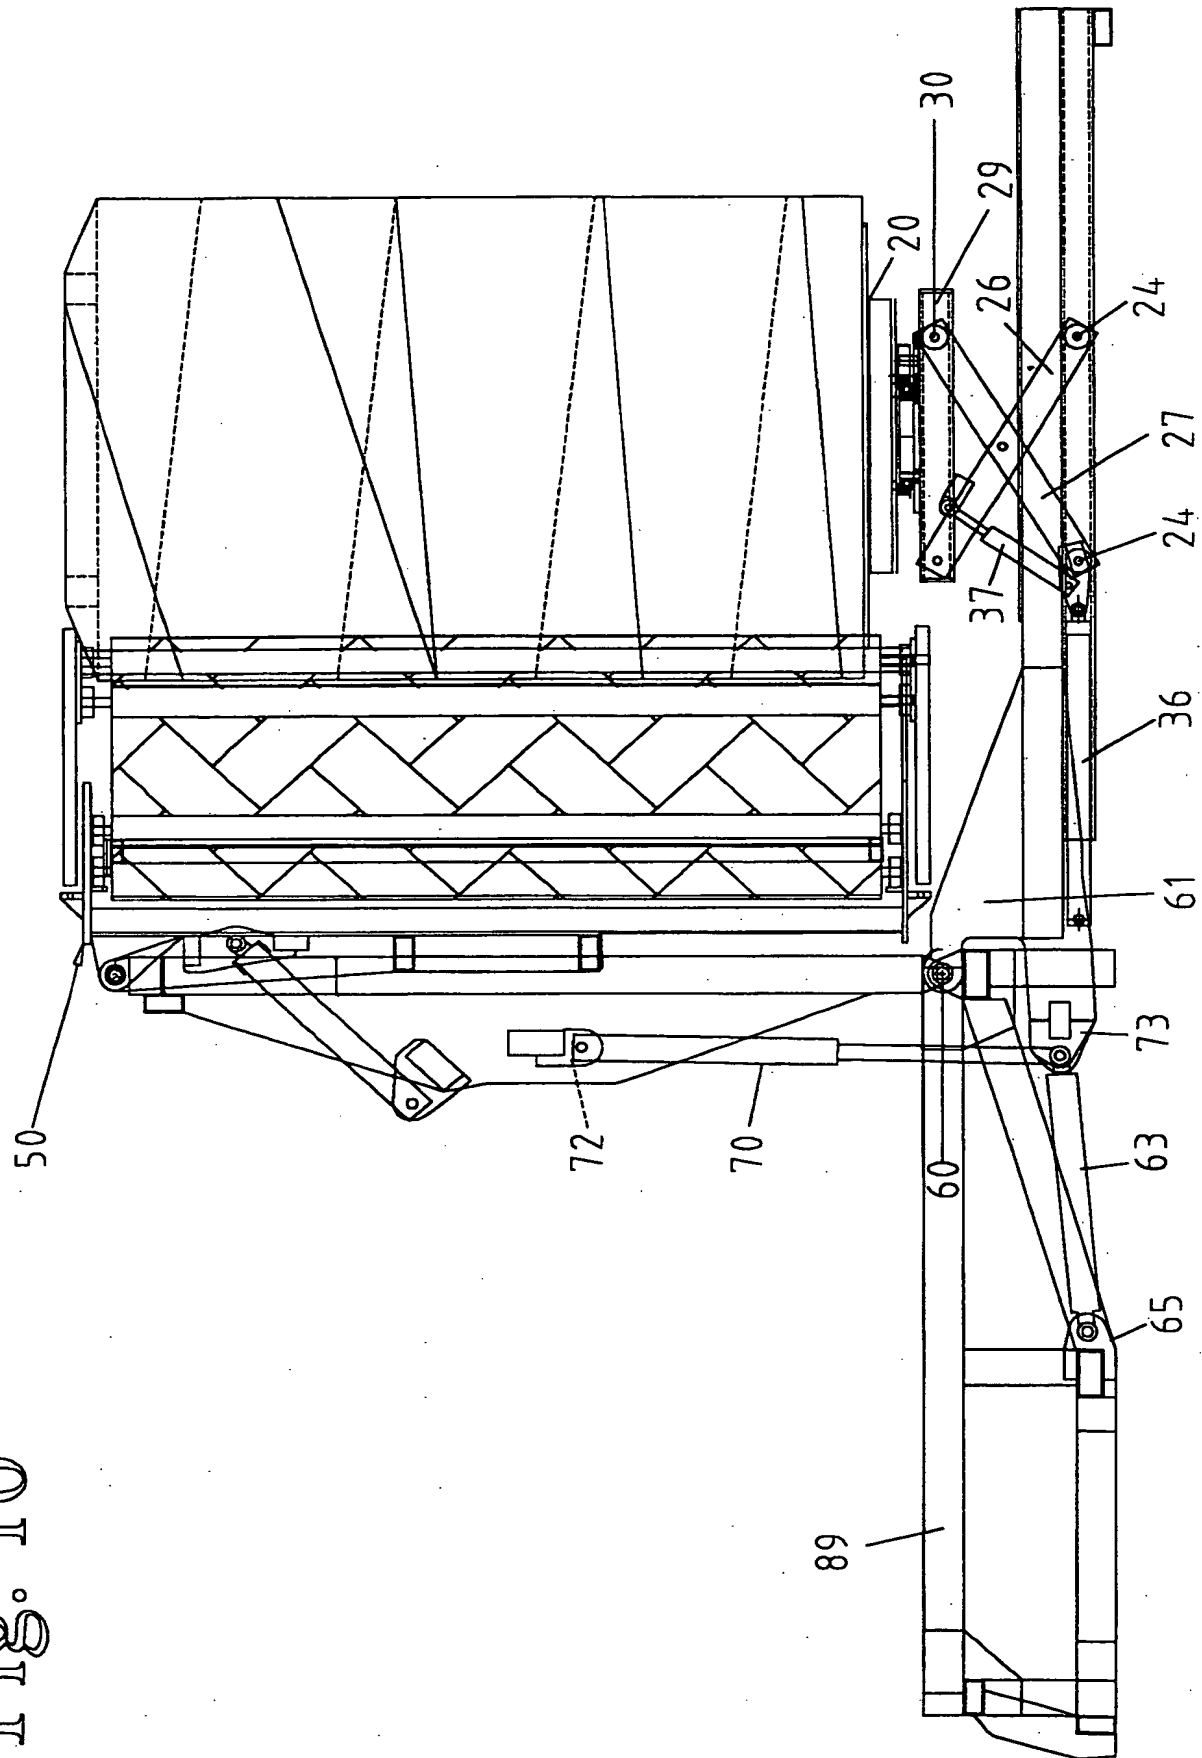

17/32

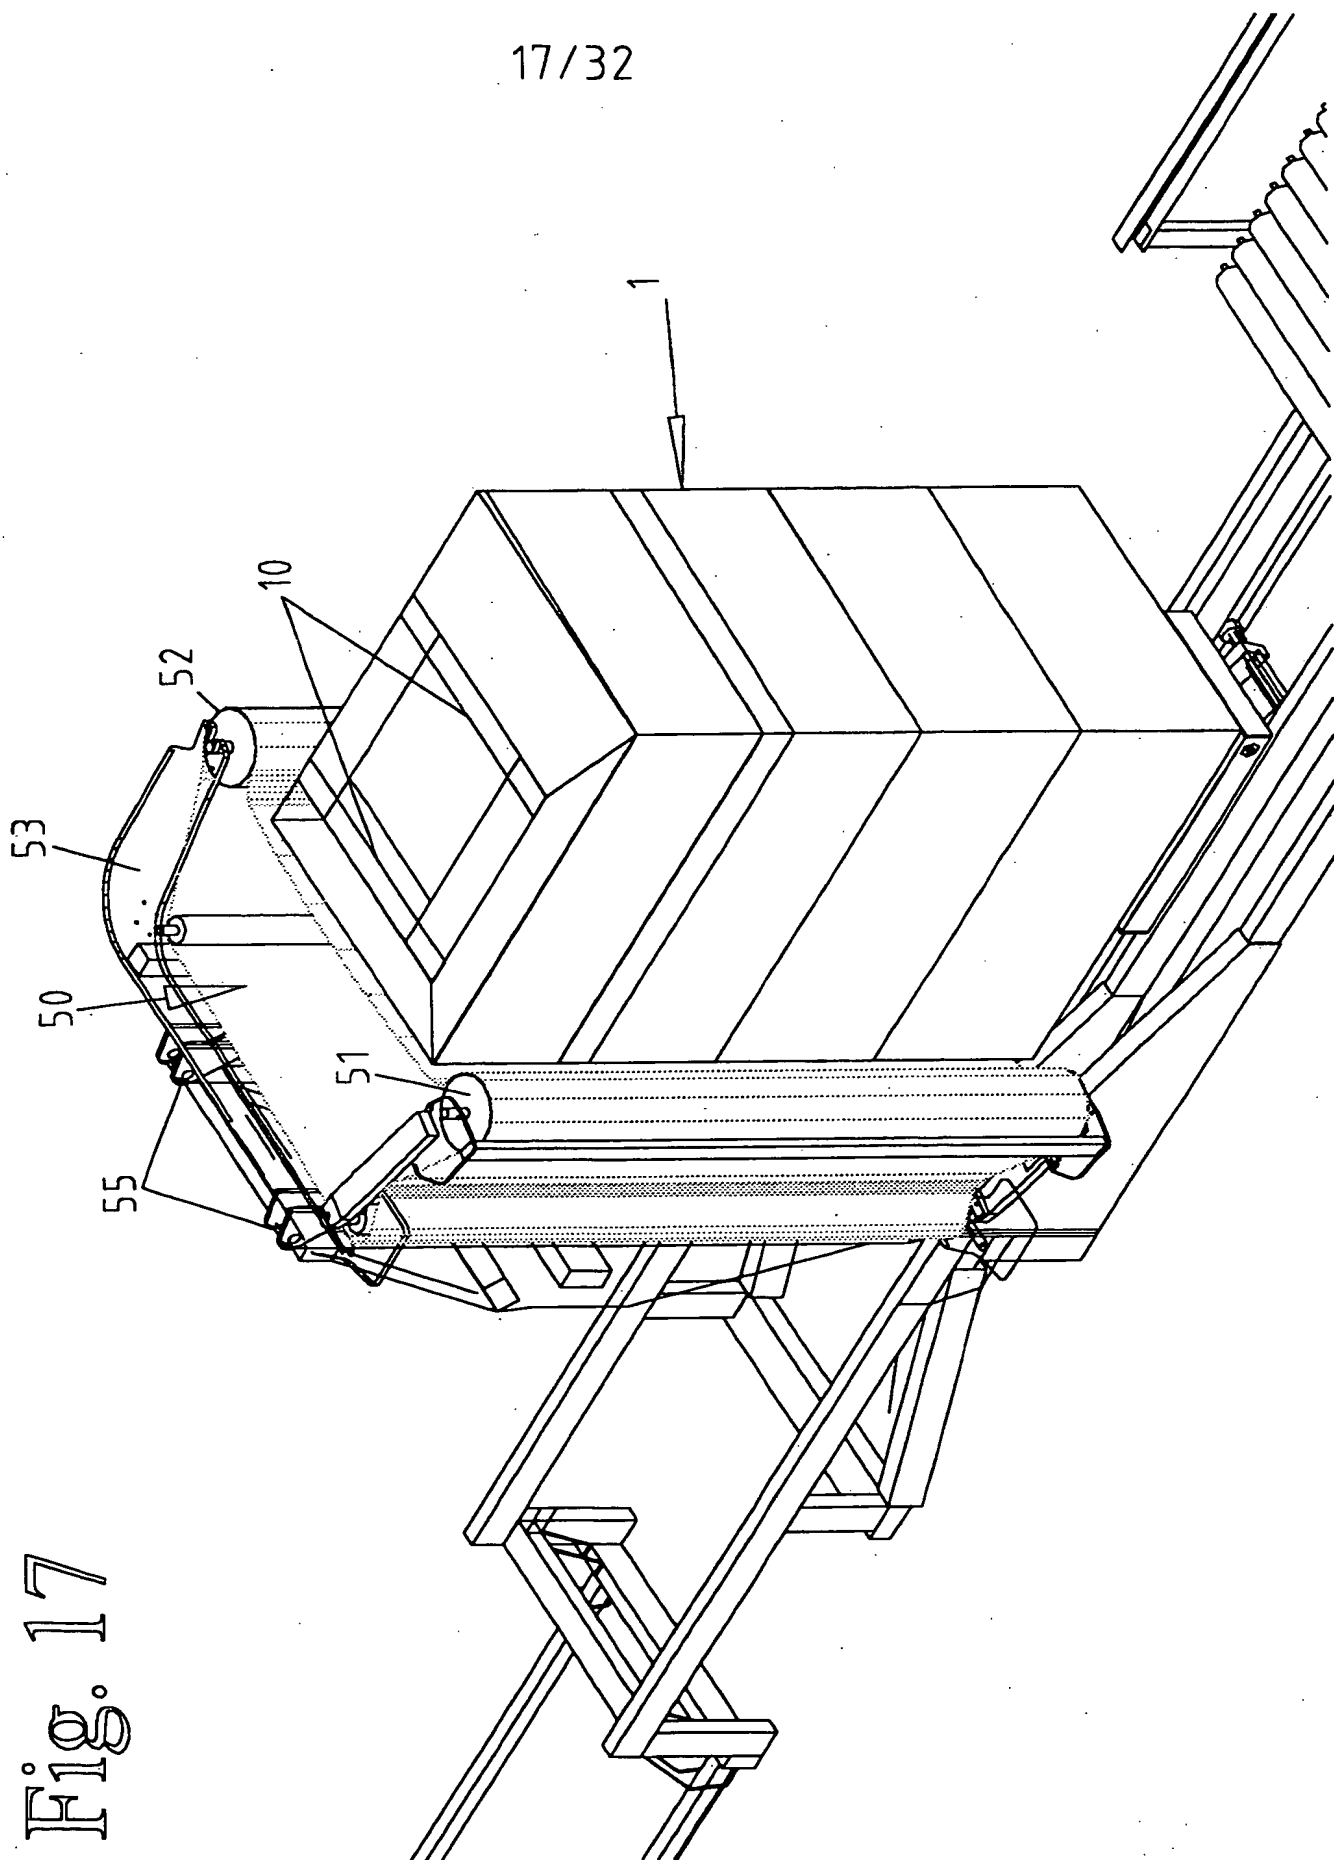


Fig. 17

18/32

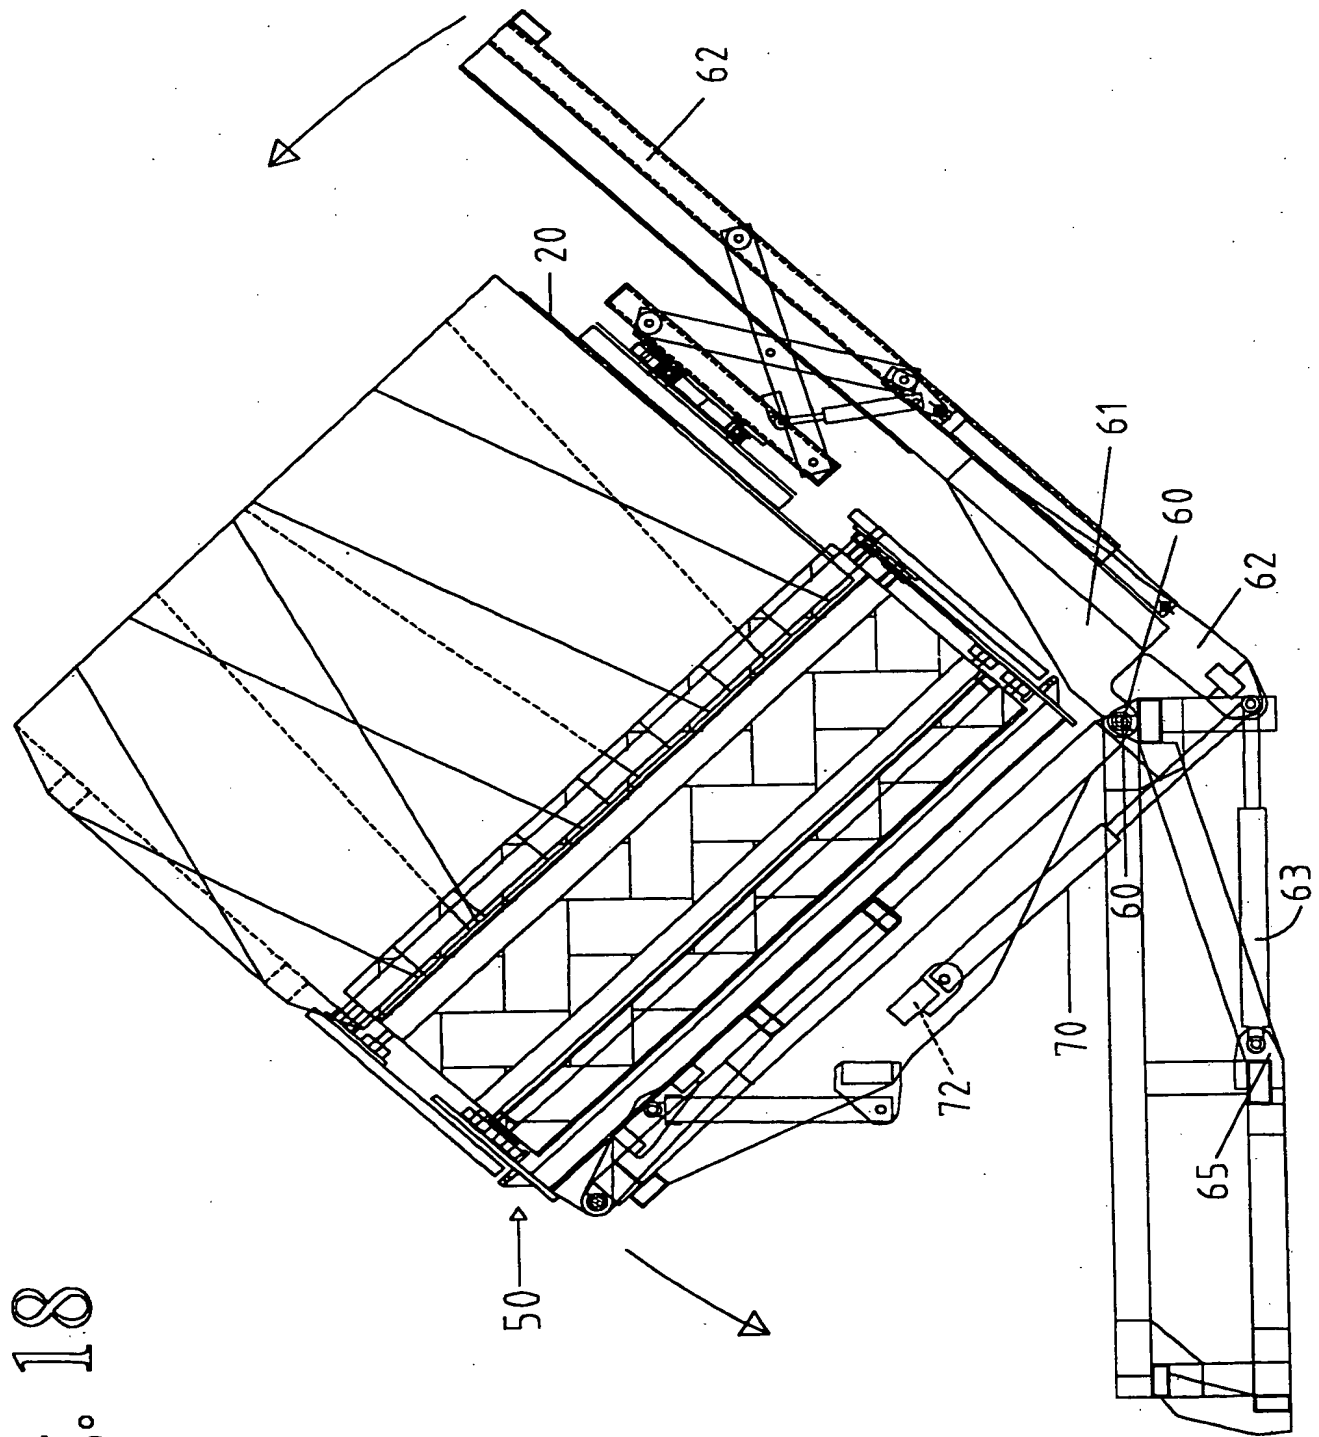


Fig. 18

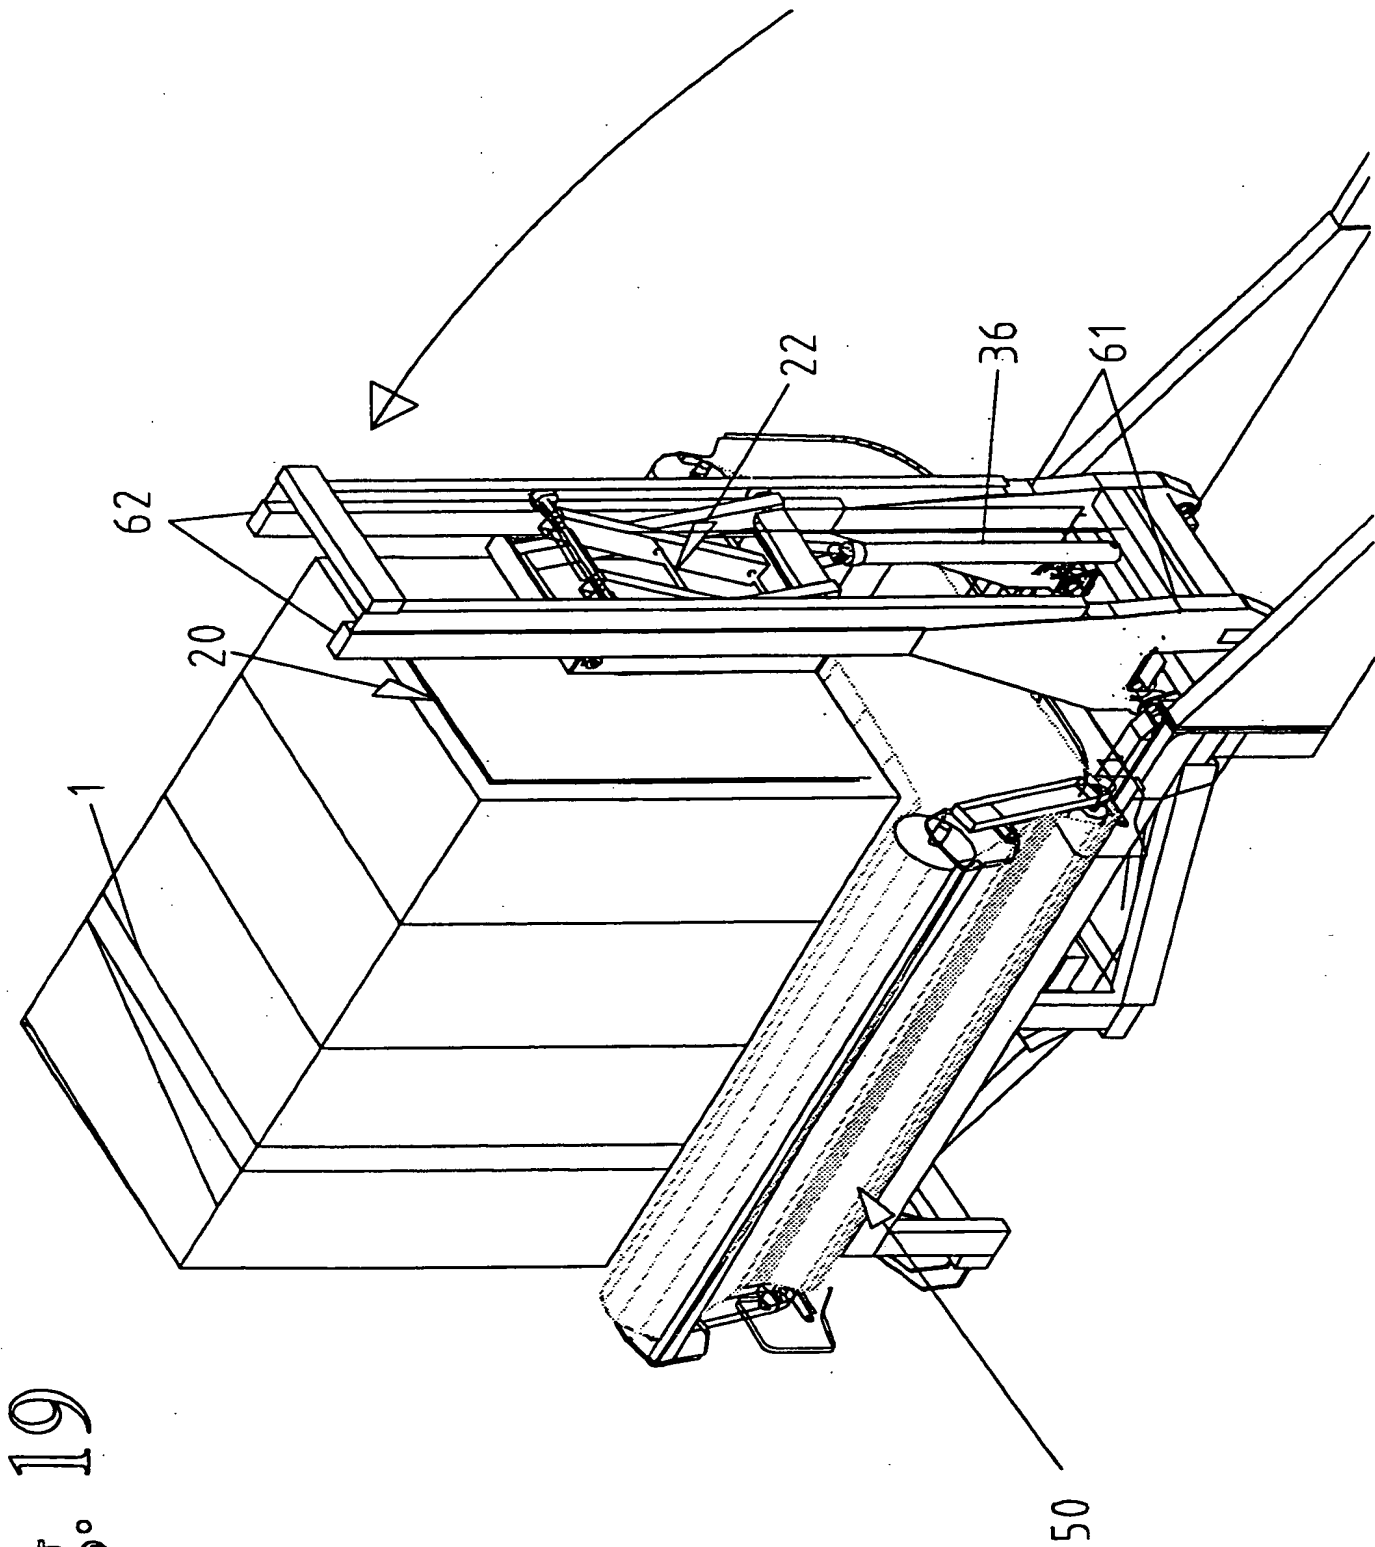
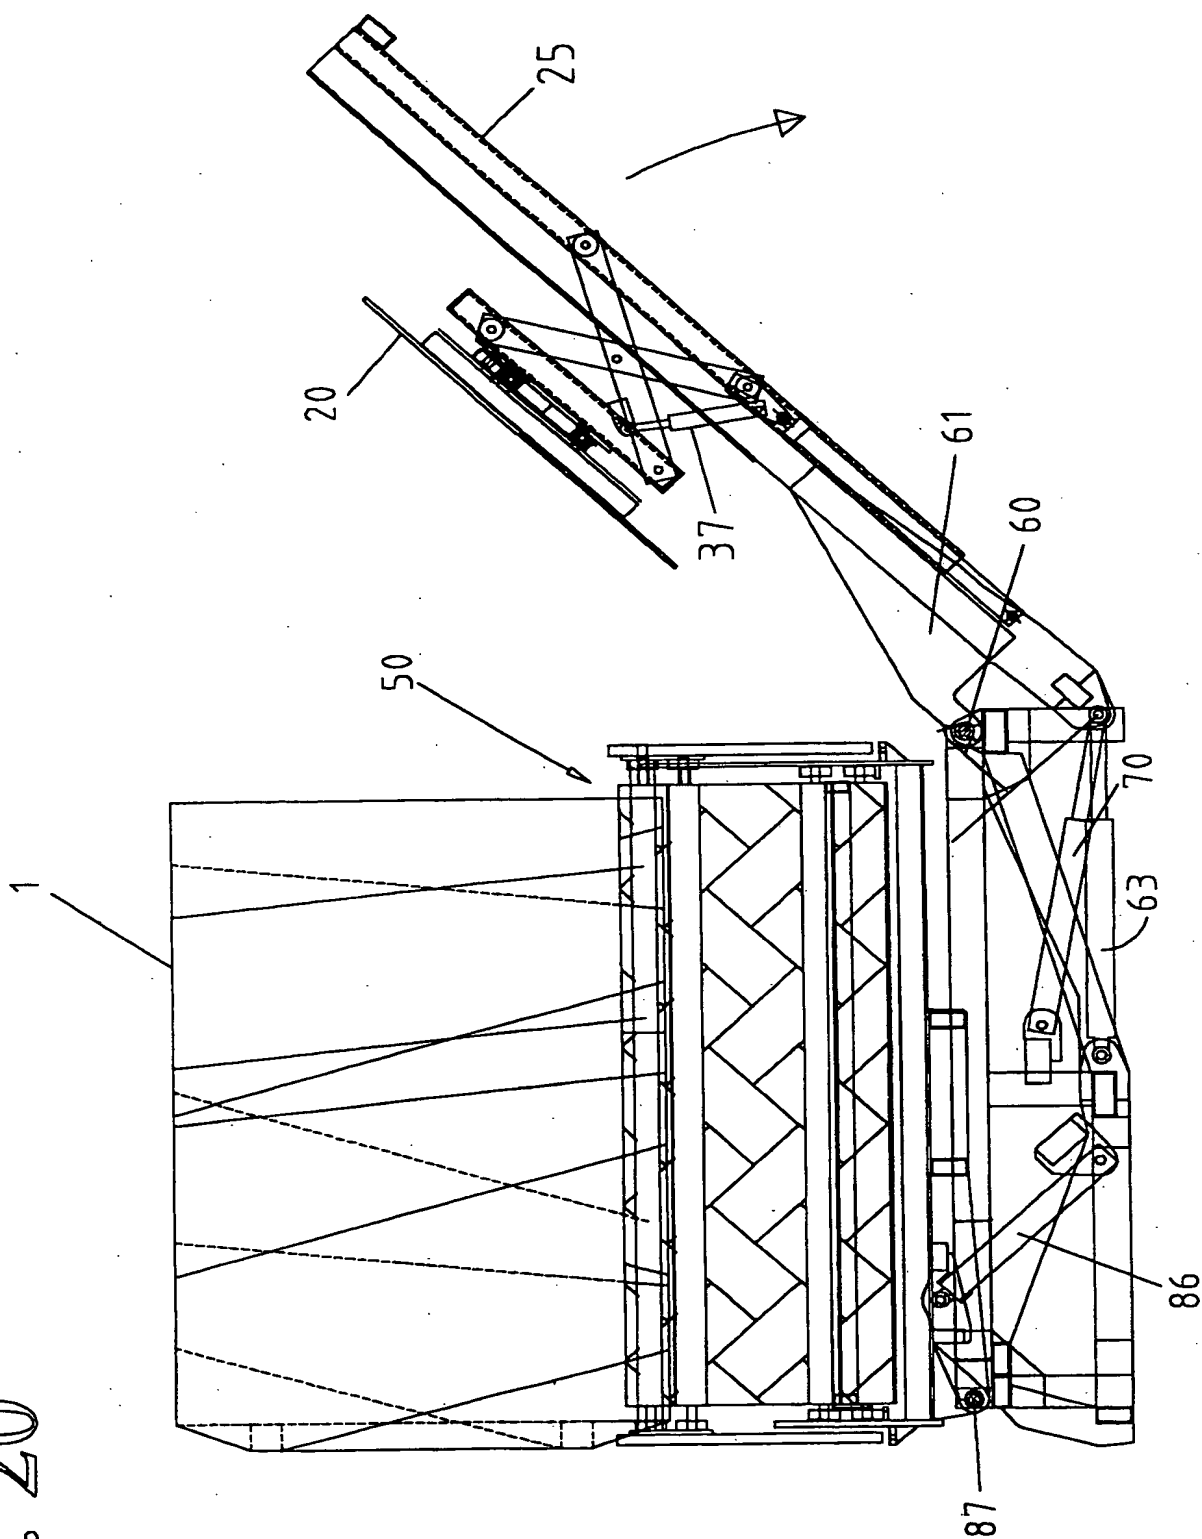


Fig. 19

20/32

Fig. 20




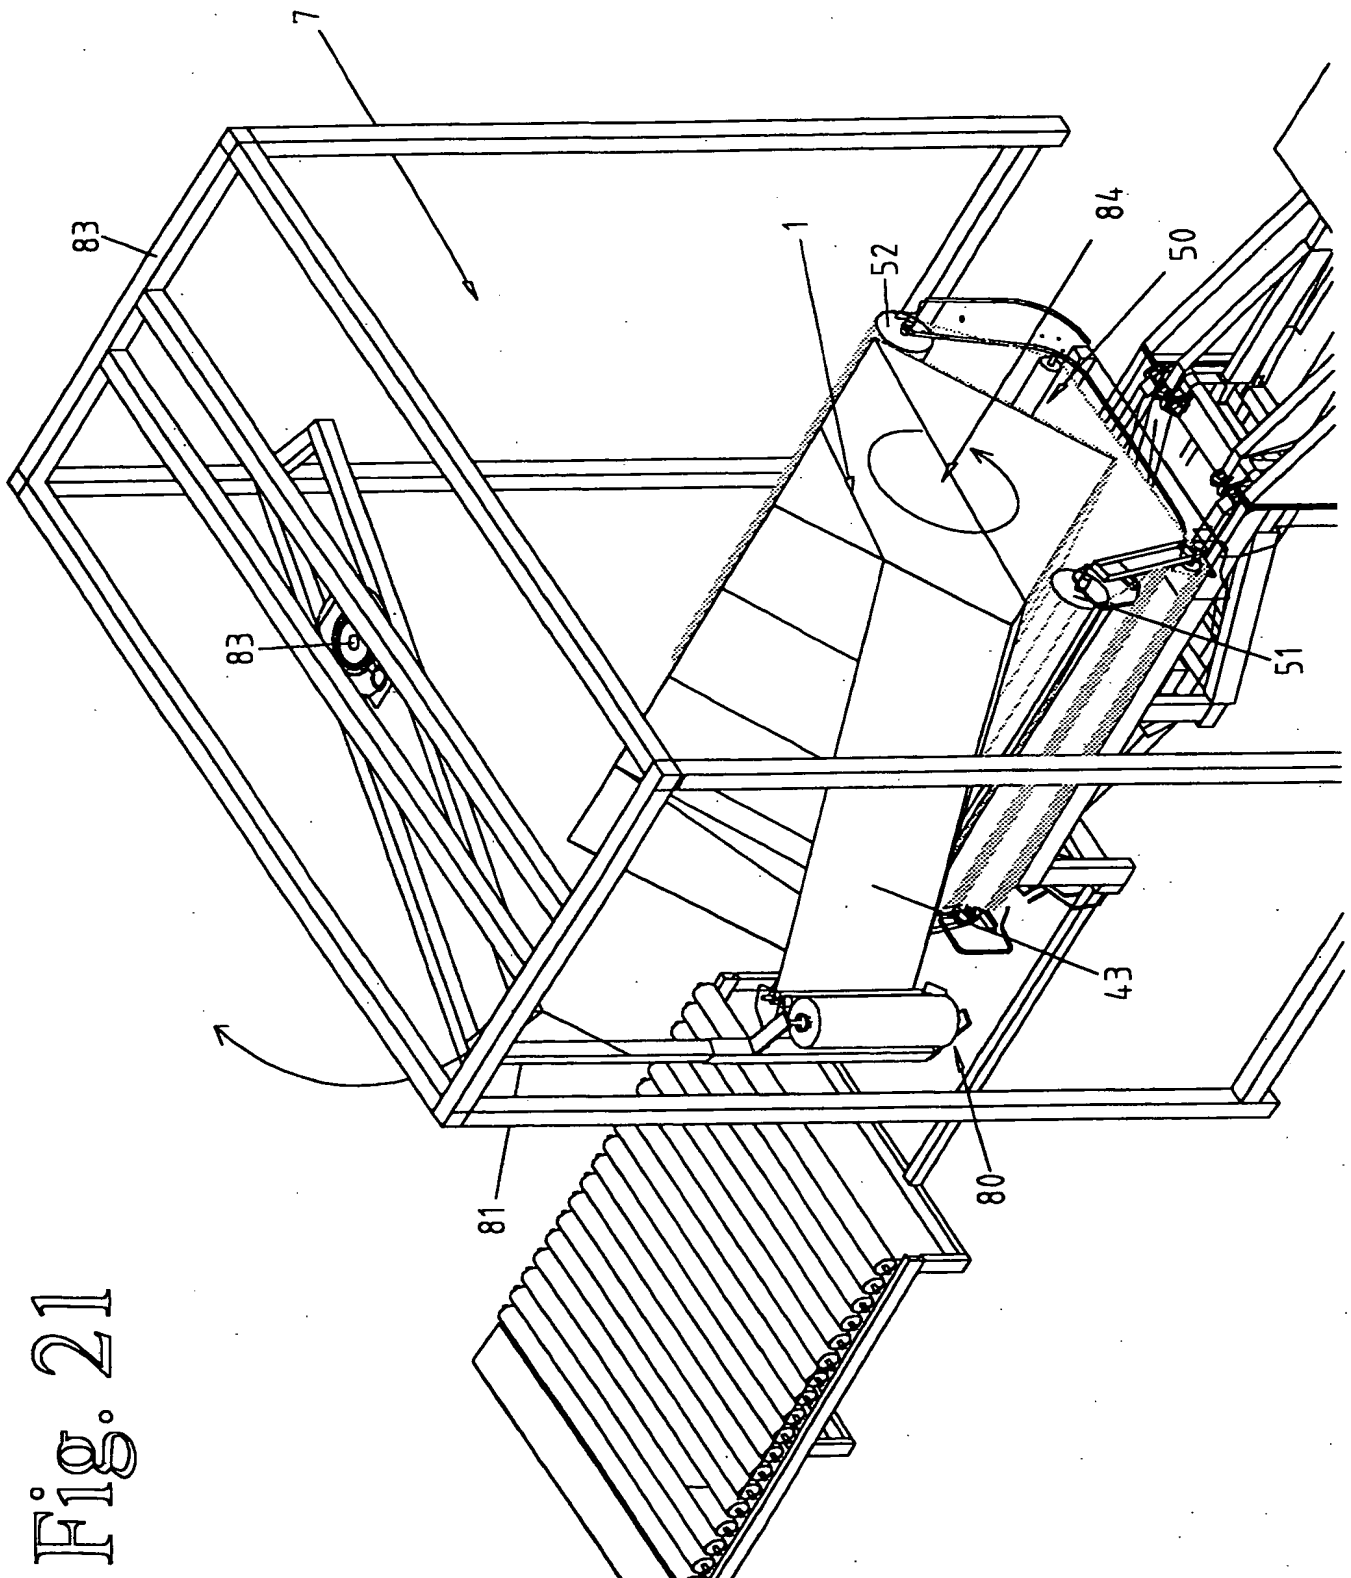


Fig. 21


22/32

Fig. 22

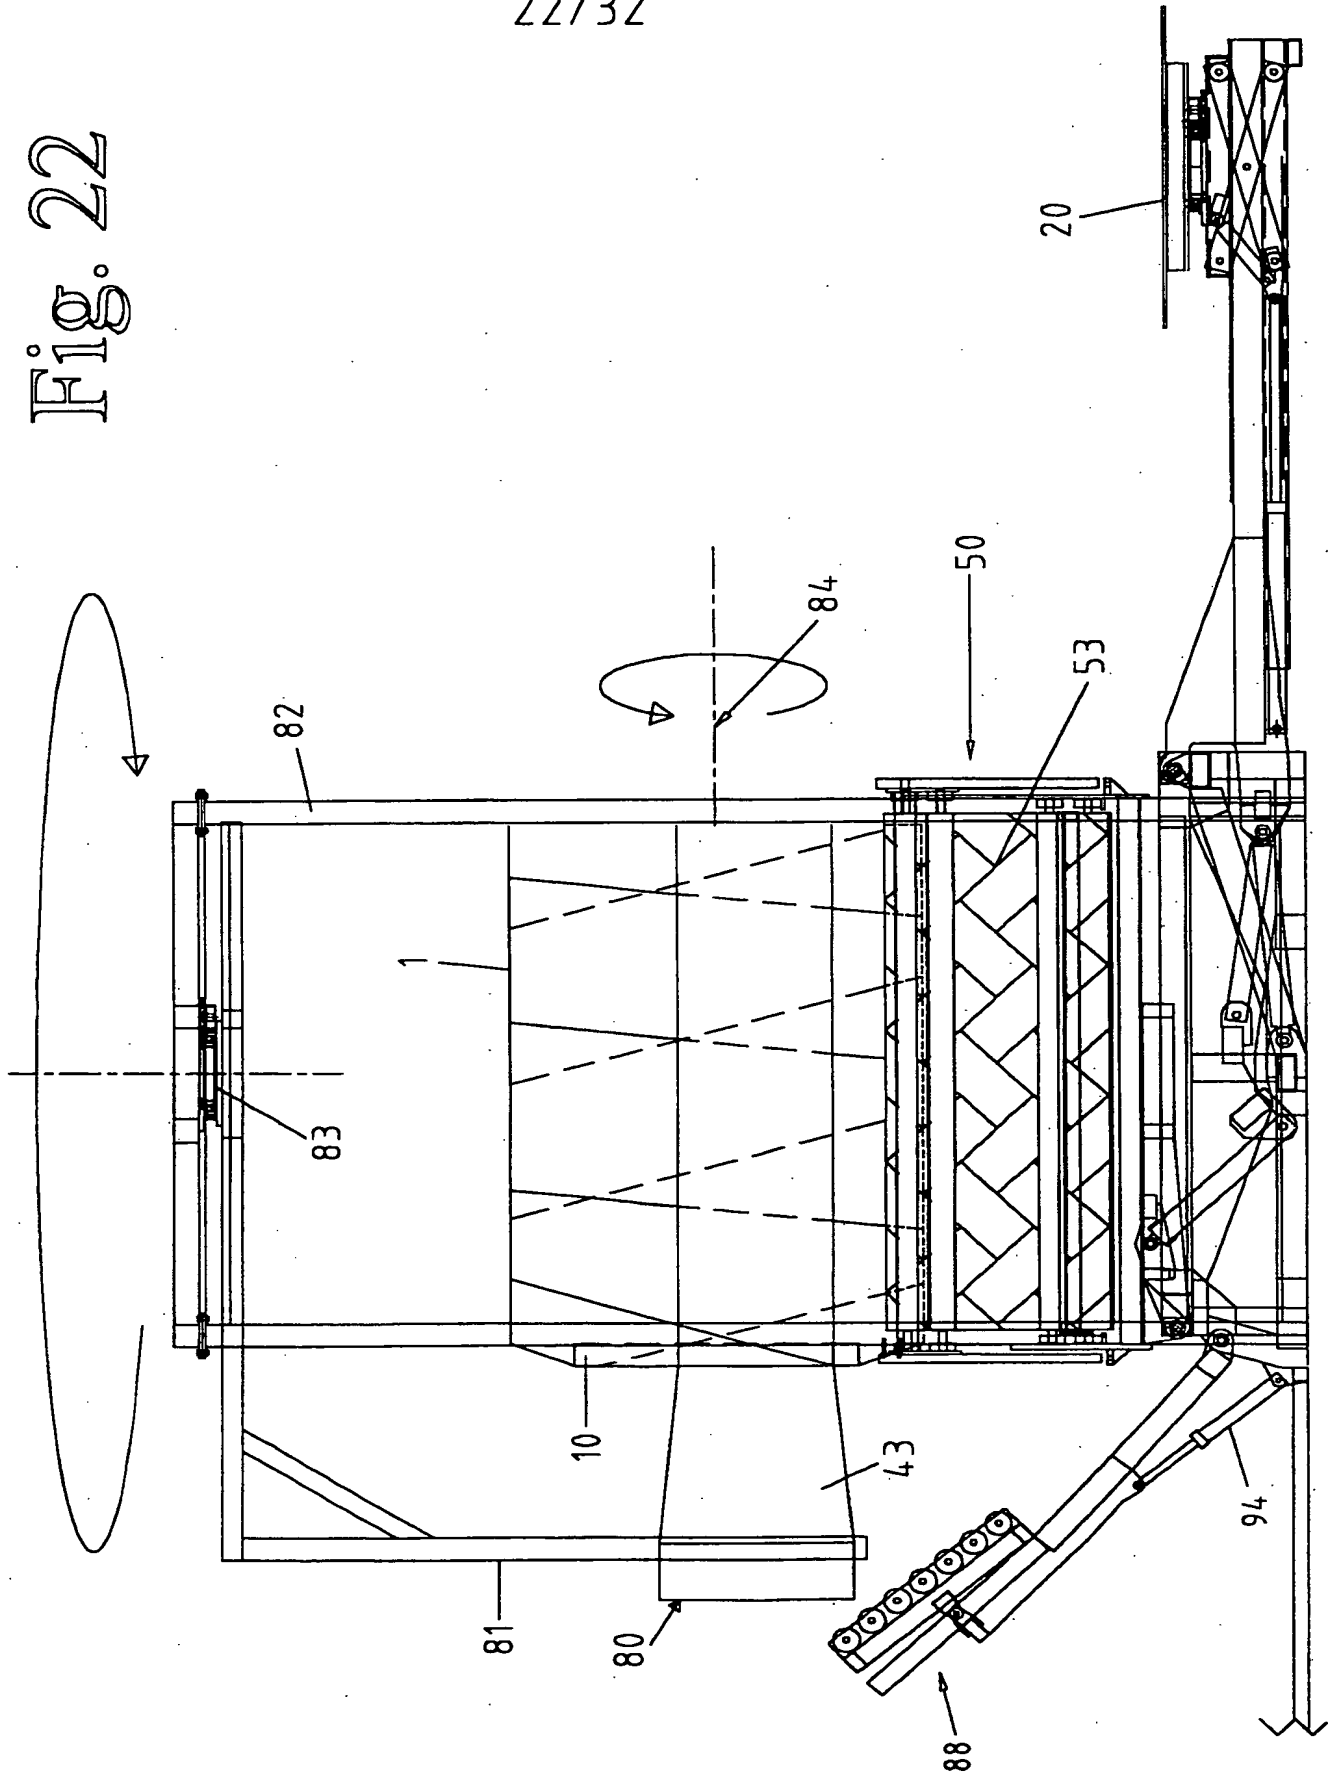


23/32

Fig. 23

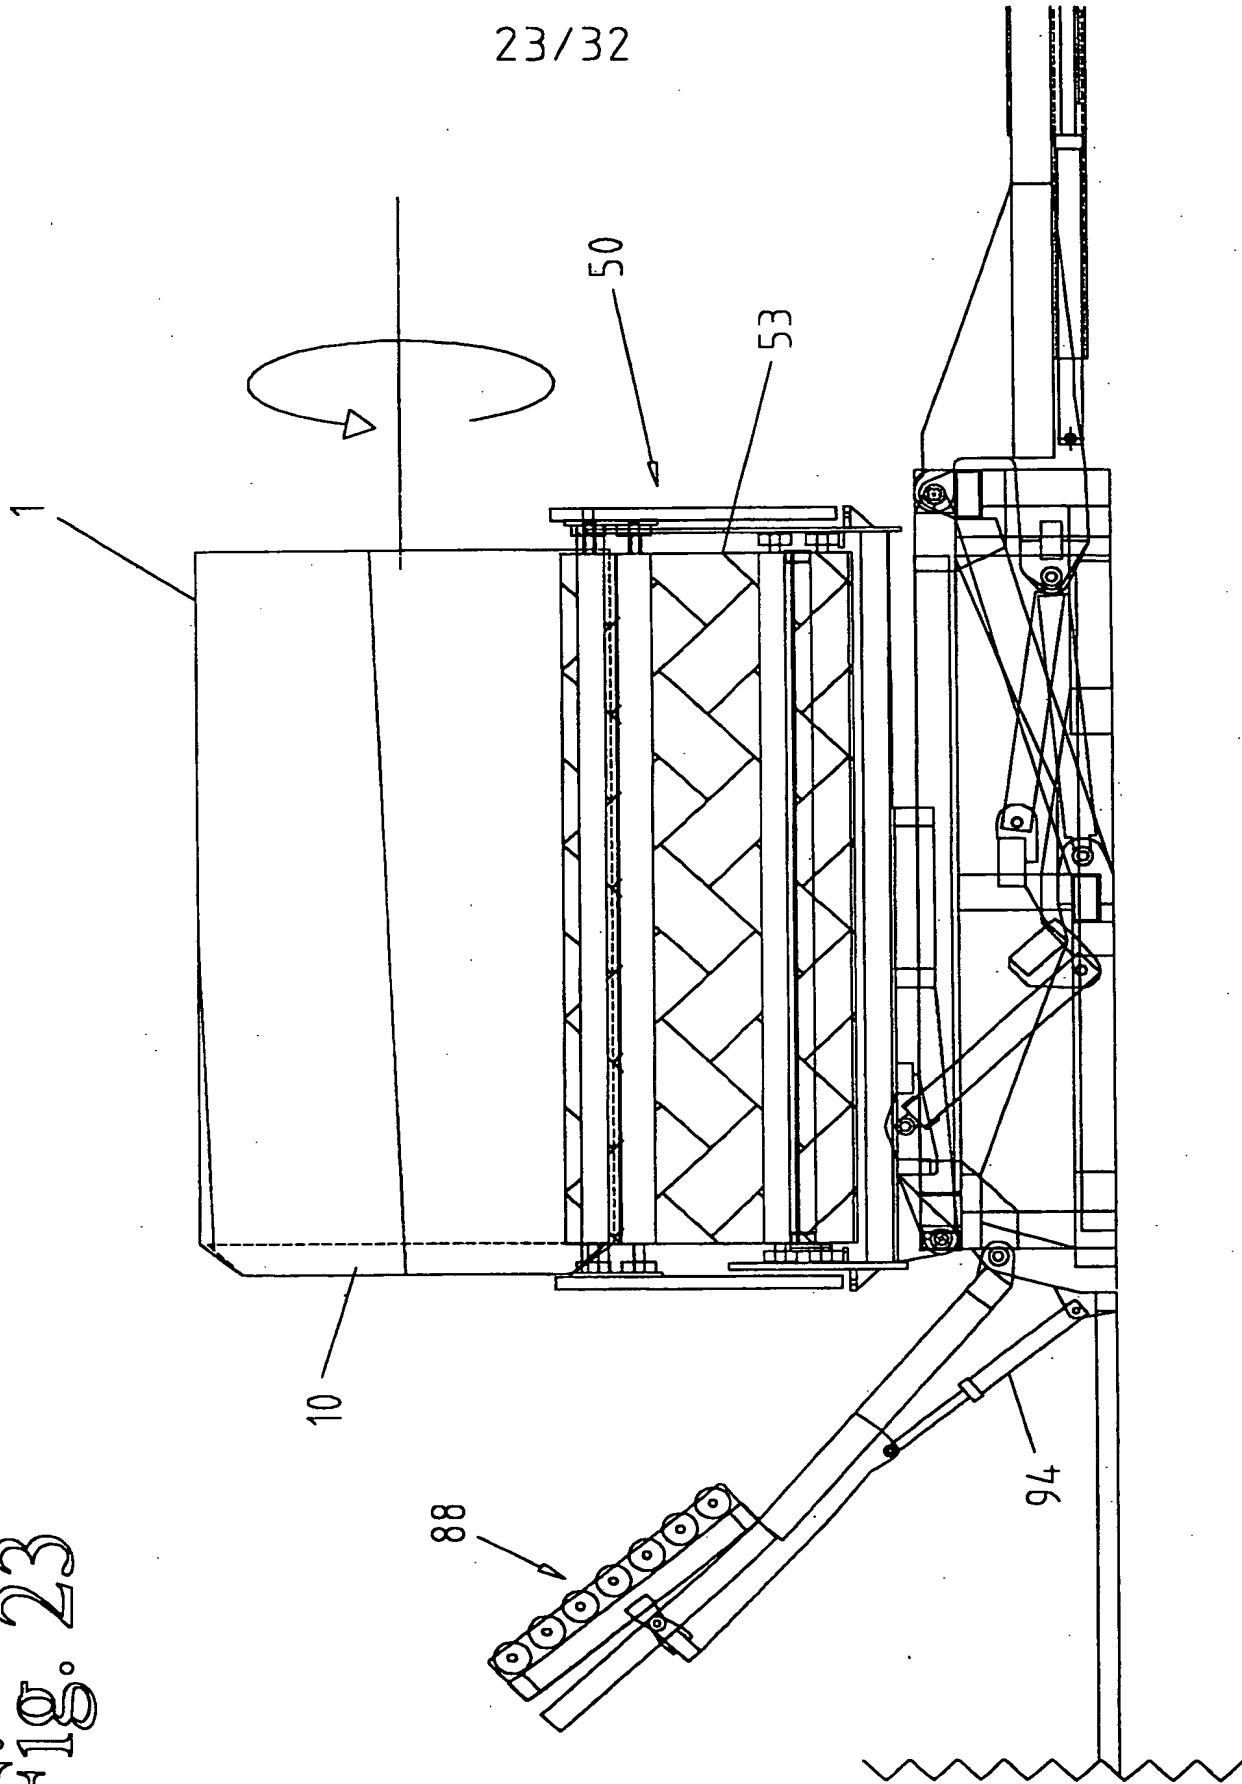

24/32

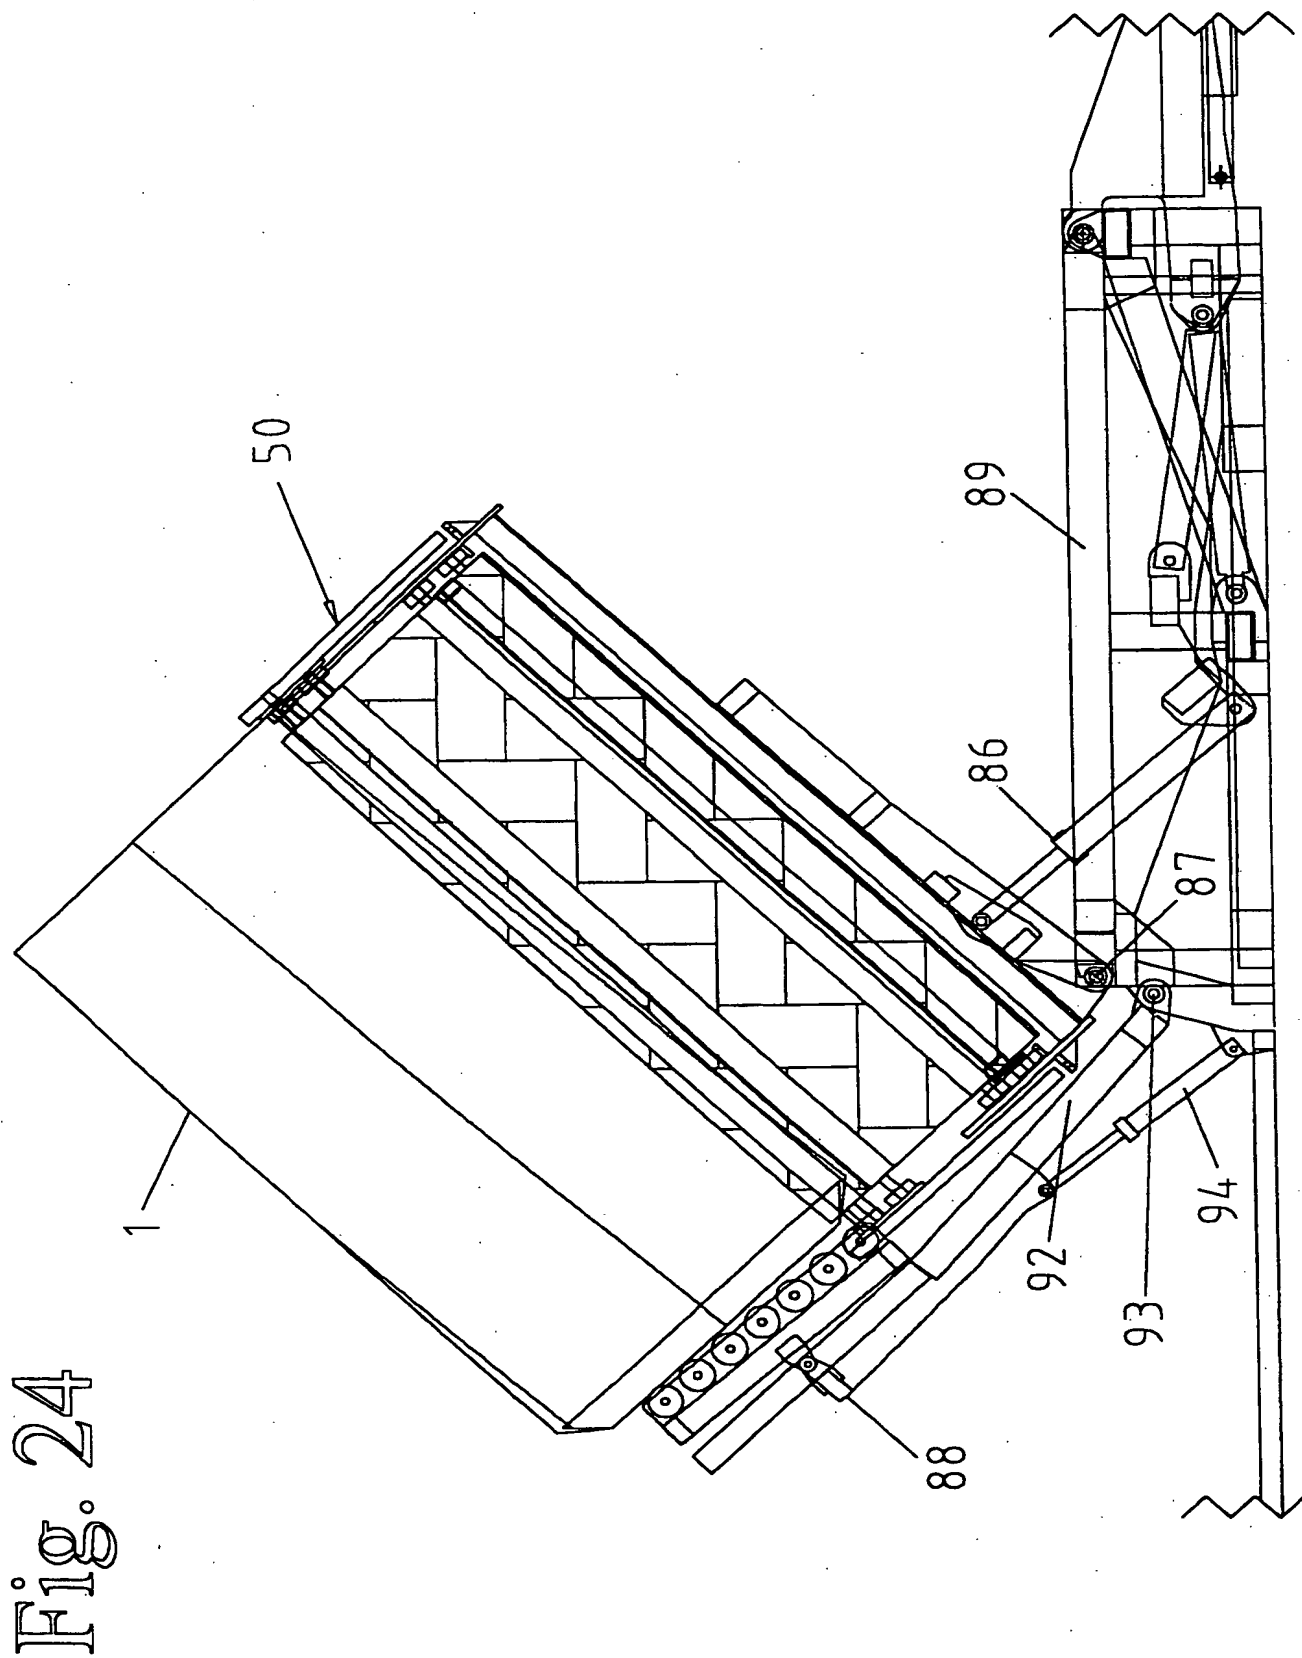



26/32


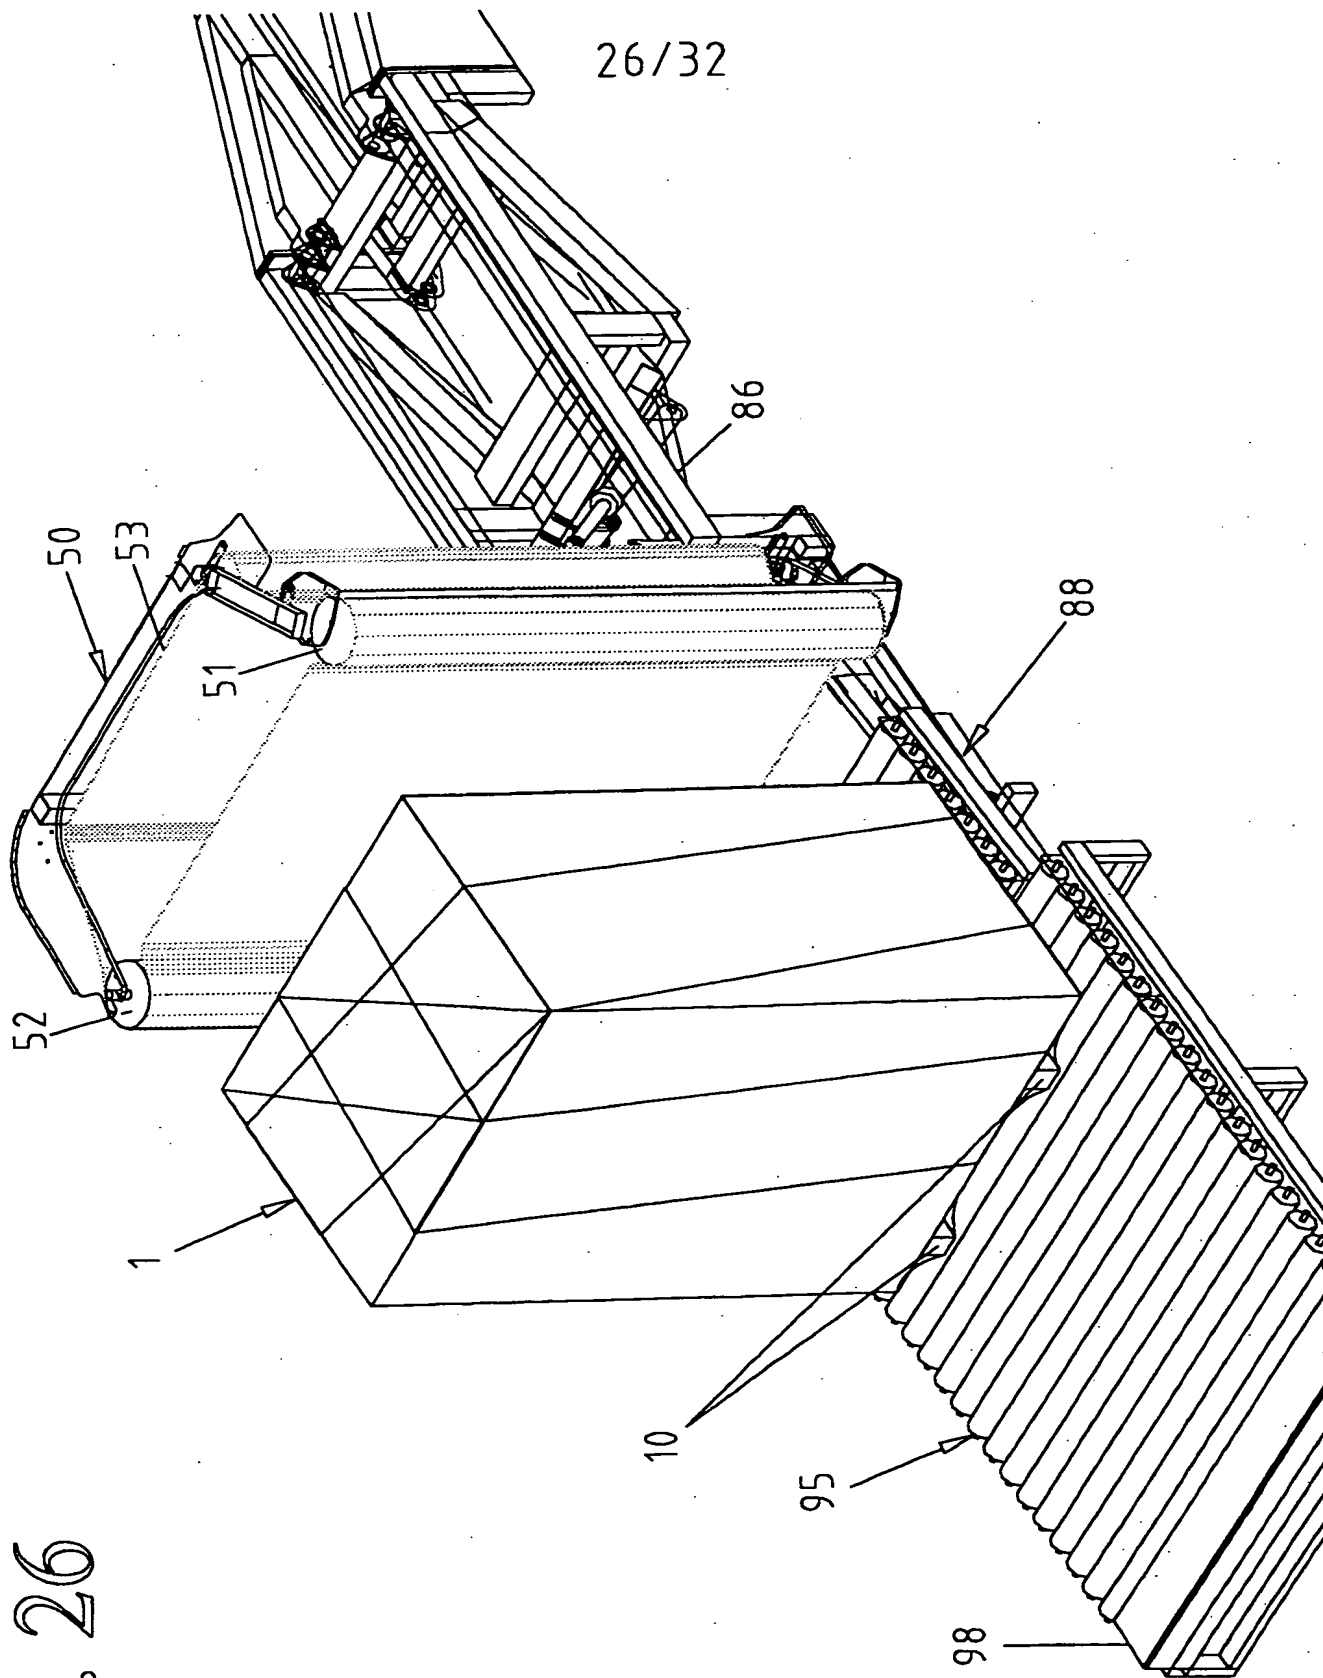


Fig. 26


27/32

Fig. 27

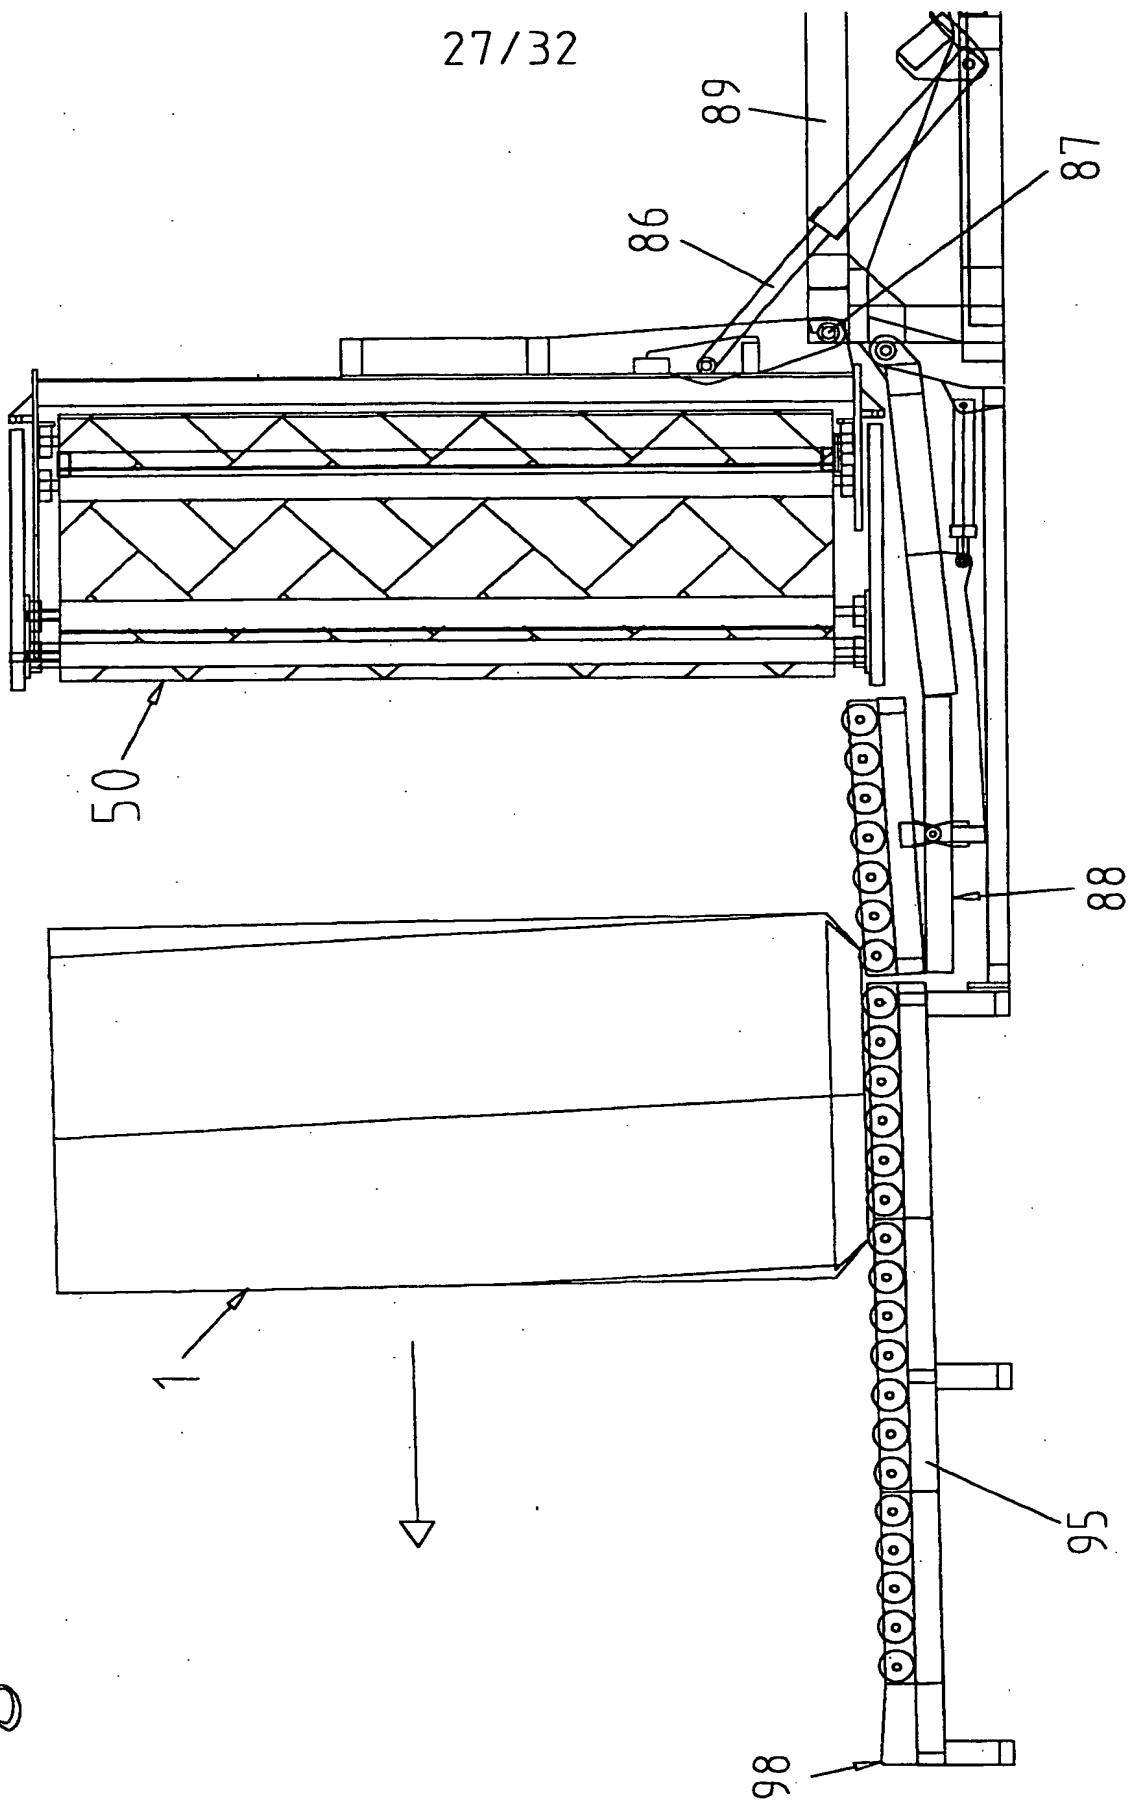


28/32

Fig. 28

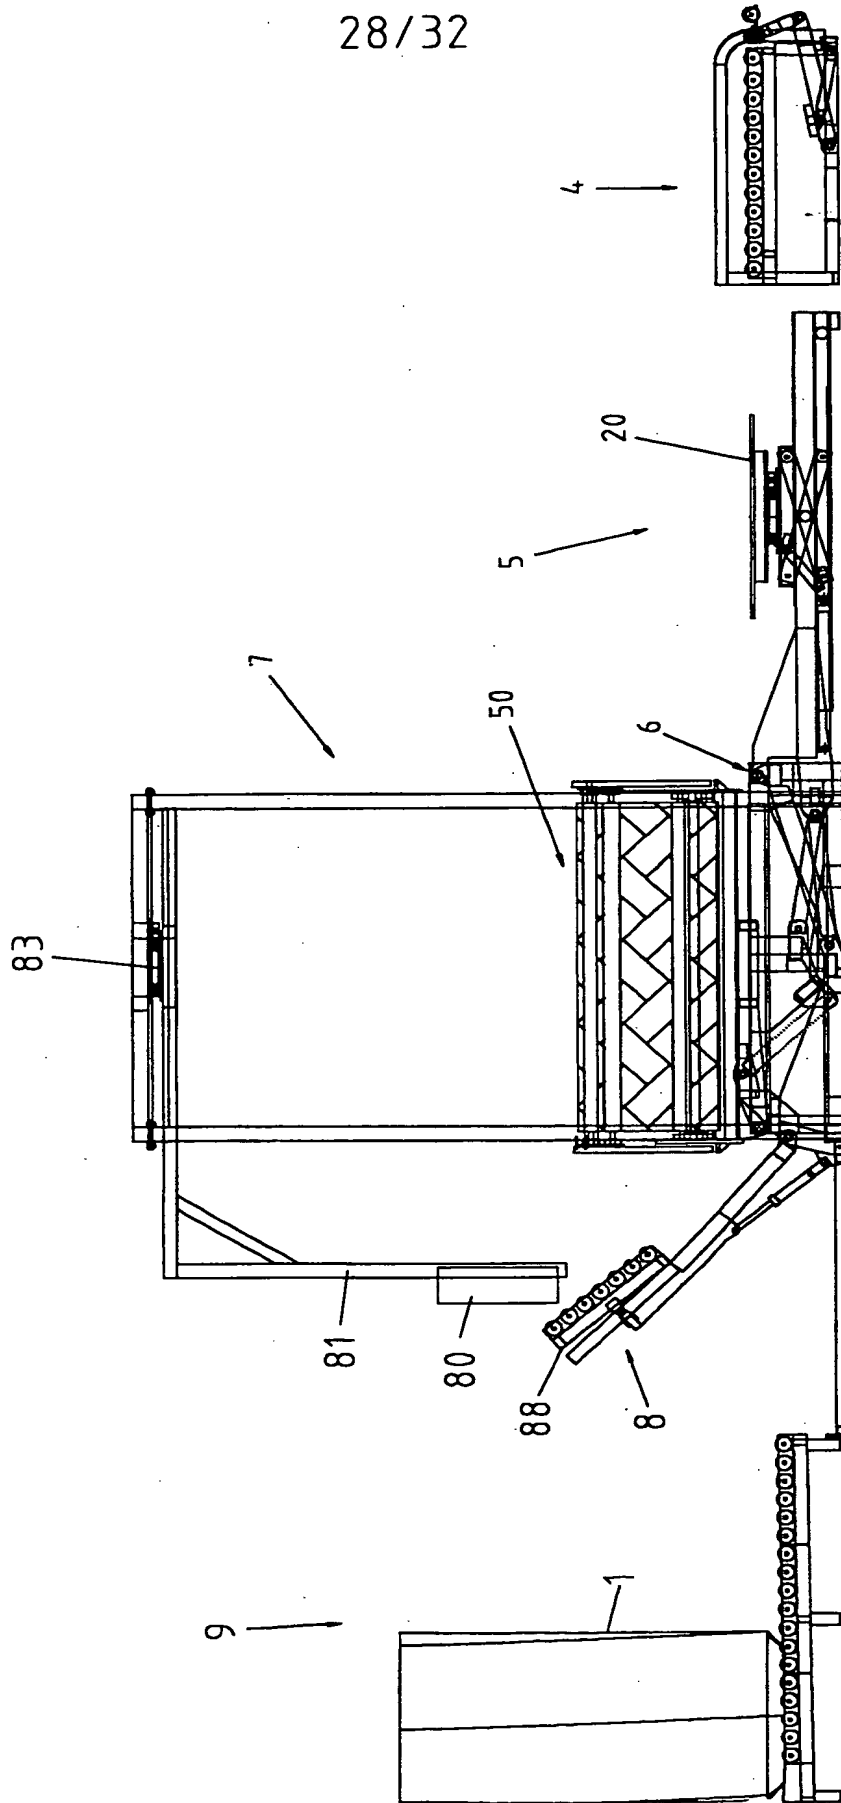

29/32

Fig. 29

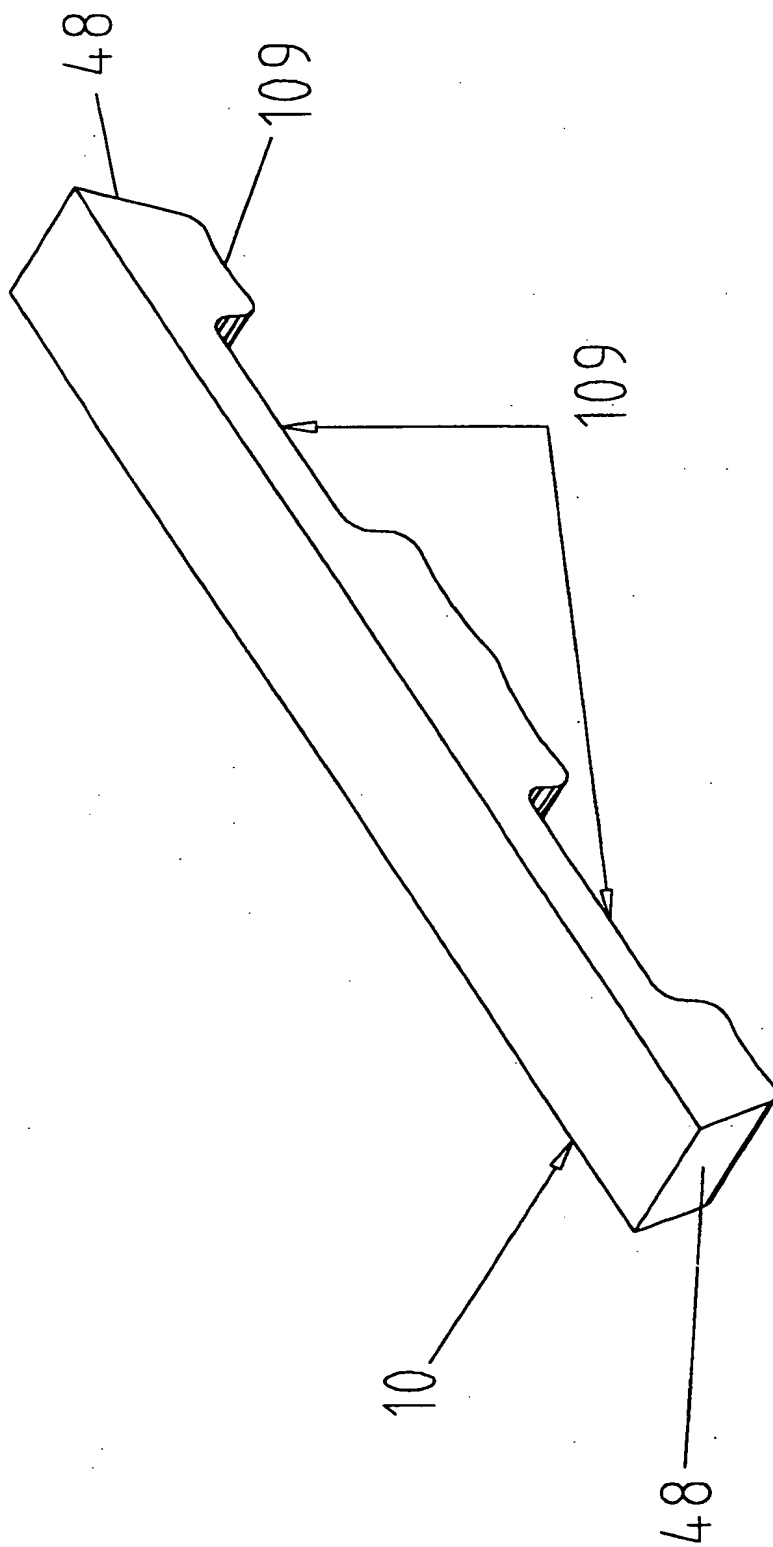

30/32

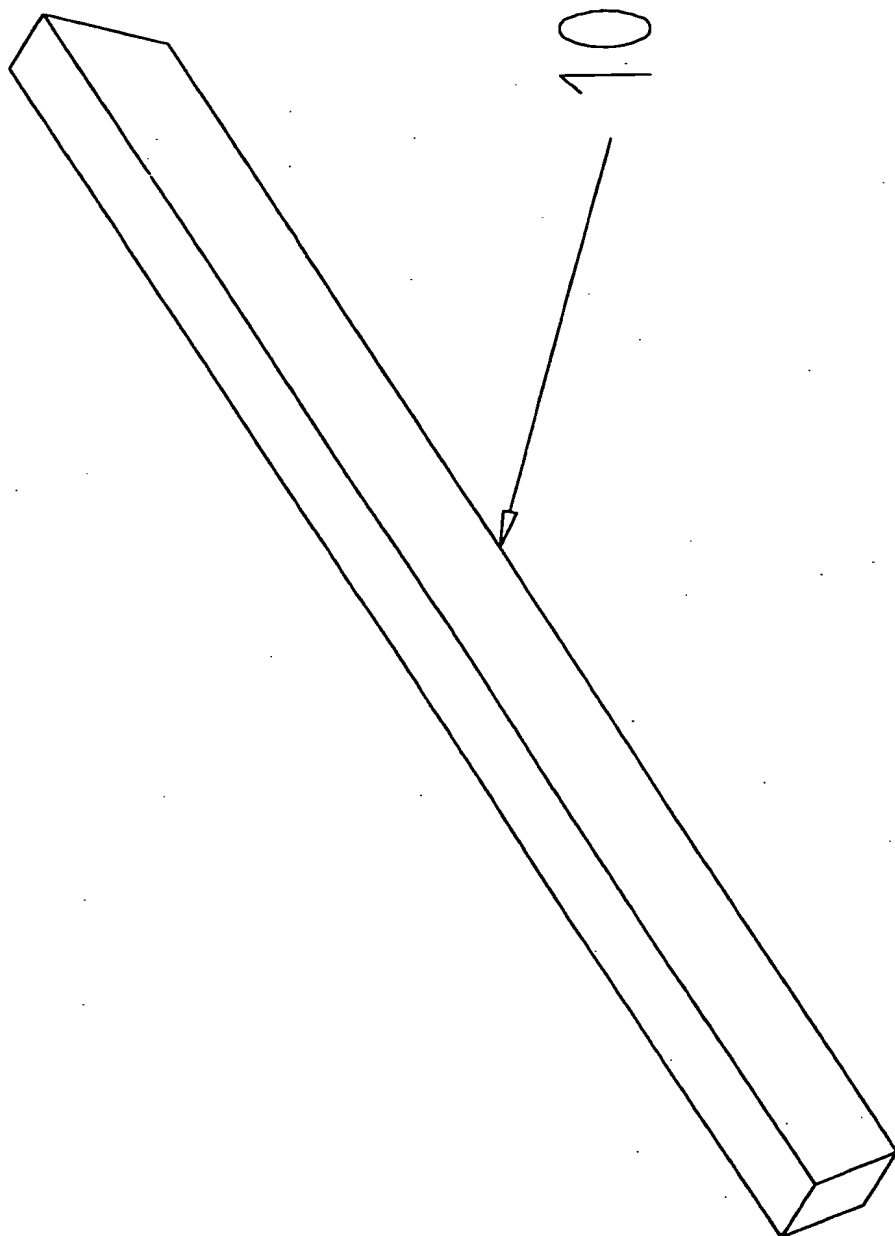


Fig. 30

31/32

Fig. 31



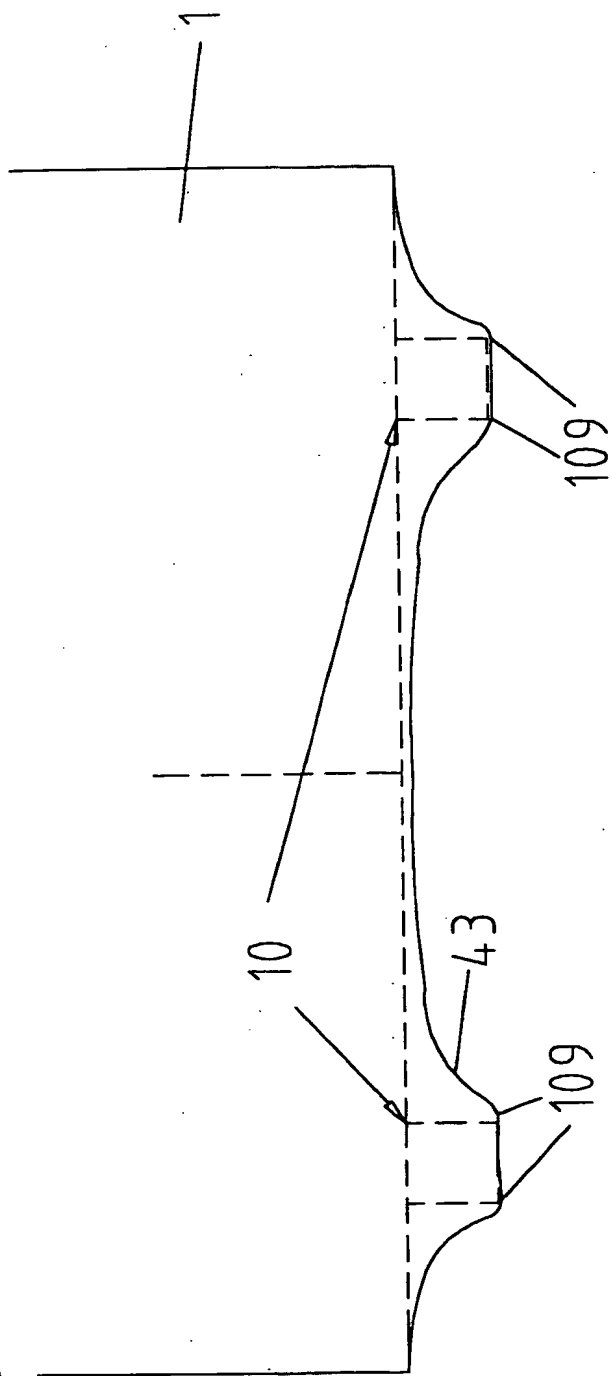


Fig. 32

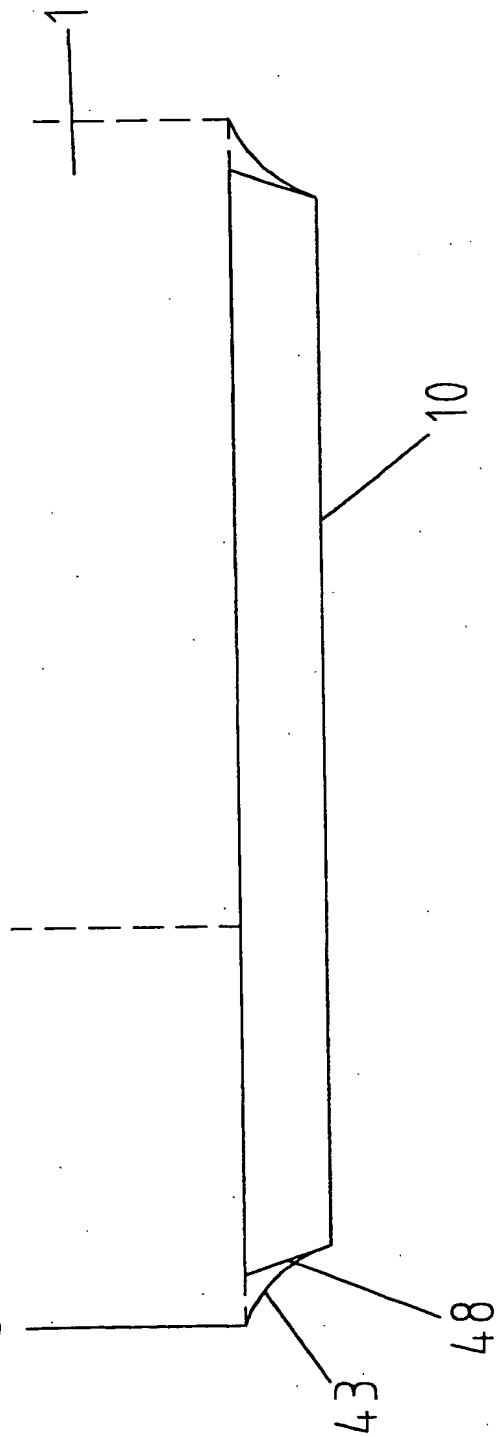

32/32

Fig. 33

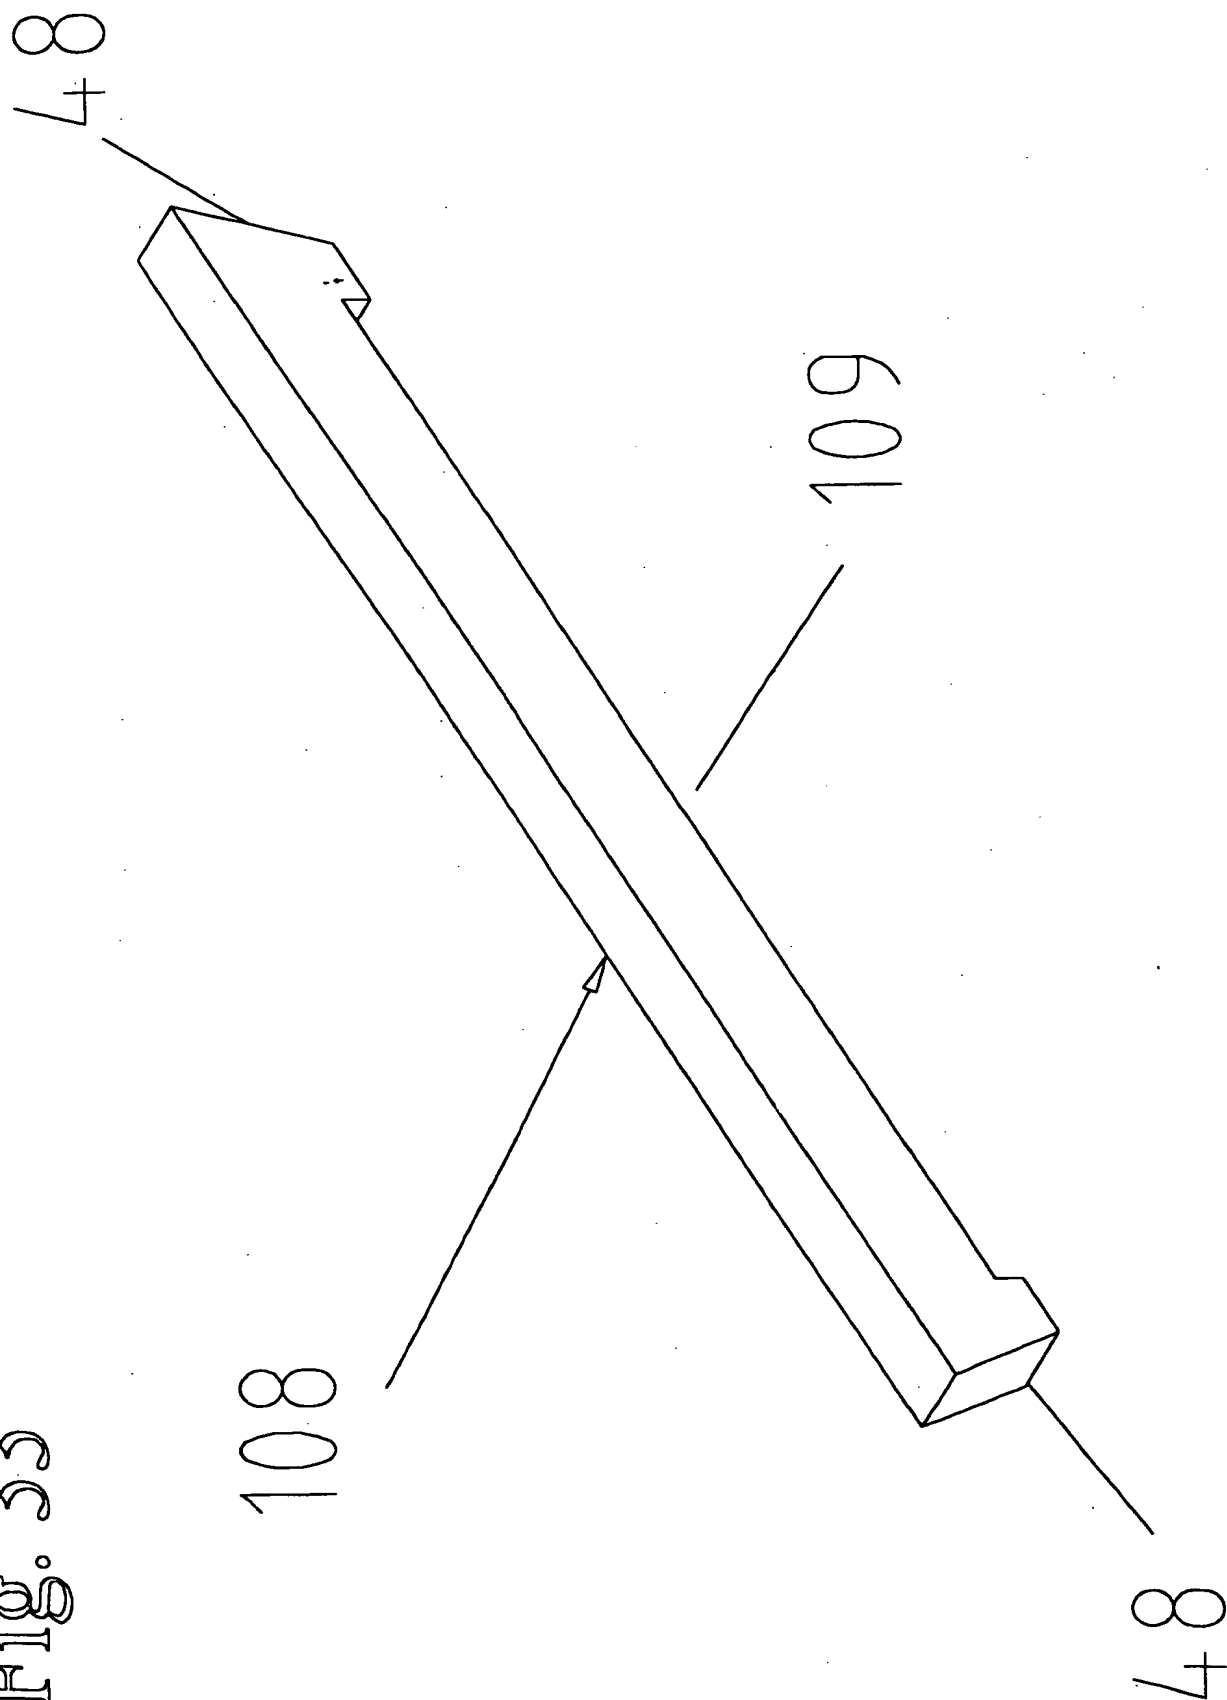

# INTERNATIONAL SEARCH REPORT

Inten. Application No.

PCT/IE 00/00104

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 B65B11/58

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B65B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 38 34 535 A (BEUMER) 29 March 1990 (1990-03-29) claims 1,13; figures -----	1,6

☐ Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

\* Special categories of cited documents :

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\* & \* document member of the same patent family

Date of the actual completion of the international search

27 November 2000

Date of mailing of the international search report

04/12/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Deutsch, J.-P.

# INTERNATIONAL SEARCH REPORT

information on patent family members

Intern. Application No

PCT/IE 30/00104

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 3834535      A	29-03-1990	NONE	